


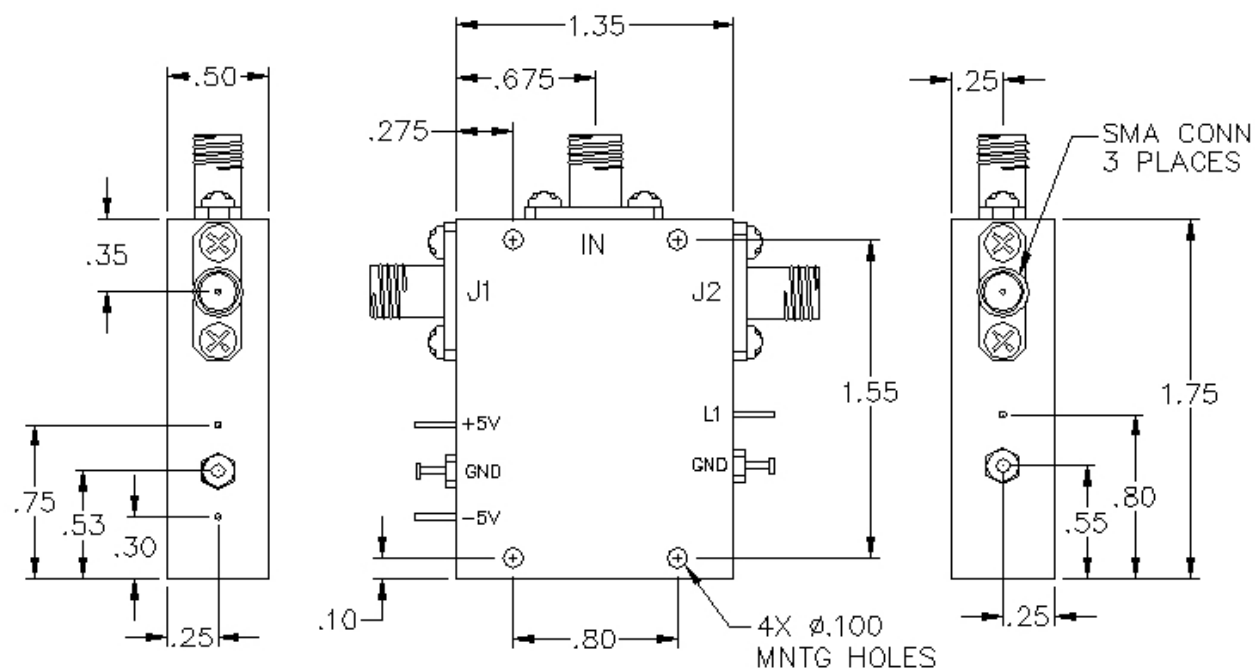

SPECIFICATIONS

Input Frequency Range:	0.02 - 1.2 GHz
Switch Type:	SP2T
Insertion Loss:	2.0 dB Max
Isolation:	70 dB Min
VSWR:	1.50:1
Input Power:	200 mw (23 dBm)
Switching Time:	100 nsec
Driver:	Schottkey TTL
Voltage/Current Required:	± 5 Vdc @ ±30 mA, Typical
Individual TTL Control Logic:	Logic "0" (-0.3V to +0.8V) = ON Logic "1" (+2.0V to +5.0V) = OFF

TTL Control Logic

L1	IN-J1	IN-J2
0	Insertion Loss	Isolation
1	Isolation	Insertion Loss

PULSAR MICROWAVE CORPORATION

PULSAR MICROWAVE CORPORATION
48 INDUSTRIAL WEST, CLIFTON NJ 07012
TEL: 973-779-6262 FAX: 973-779-2727
WWW.PULSARMICROWAVE.COM

DESCRIPTION :

Absorptive RF/Microwave Switch

MODEL NO. :

SW2AD-24

DIMENSIONS ARE IN INCHES
DECIMAL TOLERANCE:
2 PLACE ± .02
3 PLACE ± .010

SIZE
A

CAGE CODE :
0HR85

REV CODE :

170201

SCALE : N / A

ALL SPECIFICATIONS ARE SUBJECT TO
CHANGE WITHOUT NOTICE AT ANY TIME

SHEET 1 OF 1