



RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

RFLUPA05M03GB

100W Wide Band Power Amplifier 0.5GHz~3GHz



Features

- Gain: 50dB Typical
- Saturated Output Power: 50dBm Min
- Supply Voltage: +48V

Typical Applications

- Wireless Infrastructure
- RF Microwave & VSAT
- Military & Aerospace
- Test Instrument
- Fiber Optics

Electrical Specifications, $T_A = +25^\circ\text{C}$, $V_{CC} = +48\text{V}$

Parameter	Min.	Typ.	Max.	Units
Frequency Range	0.5		3	GHz
Gain	50	53		dB
Gain Flatness		± 1.5	± 2.0	dB
Gain Variation Over Temperature ($-45 \sim +85$)		± 2		dB
Input VSWR		1.5		: 1
Output Power for 1 dB Compression (P1dB)	46	47		dBm
Saturated Output Power (Psat)	50	51		dBm
3rd order intermodulation product (IM3) @P1dB		-25		dBc
Supply Voltage	46	48	50	V
Supply Current ($V_{CC}=+48\text{V}$)		1000	7000	mA
Efficiency at Psat (RF Output Power / DC Power Consumption)		30		%
Isolation S12		-60		dB
Ruggedness: Output Mismatch, all phase angles	VSWR = 6:1, No Device Damage			
Weight				ounces
Impedance	50			Ohms
Input / Output Connectors	SMA-Female / N-Female			
Finish	Nickel Plated			
Material	Aluminum			
Package Sealing	Epoxy Sealed (Standard)			
	Hermetically Sealed (Optional)			

100W Wide Band Power Amplifier 0.5GHz~3GHz



Absolute Maximum Ratings

Operating Voltage	+50V
RF Input Power	+3dBm

Biasing Up Procedure

Step 1	Connect Ground Pin
Step 2	Connect input and output
Step 3	Connect +48V biasing
Power OFF Procedure	
Step 1	Turn off +48V biasing
Step 2	Remove RF connection
Step 3	Remove Ground.

Environmental Specifications and Test Standards

Parameter	Standard	Description
Operational Temperature	MIL-STD-39016	-40°C~+85°C (Case Temperature)
Storage Temperature		-55°C~+125°C
Thermal Shock		1 Hour@ -45°C → 1 Hour @ +85°C (5 Cycles)
Random Vibration		Acceleration Spectral Density 6 (m/s) Total 92.6 RMS
Electrical & Temperature Burn In		Temperature +85°C for 72 Hours
Shock		1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	MIL-STD-883	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)		MIL-STD-883 (For Hermetically Sealed Units)



Amplifier Use

Ensure that the amplifier input and output ports are safely terminated into a proper 50 ohm load before turning on the power. Never operate the amplifier without a load. A proper 50 ohm load is defined as a load with impedance less than 1.9:1 or return loss larger than 10dB relative to 50 Ohm within the specified operating band width.

Power Supply Requirements

Power supply must be able to provide adequate current for the amplifier. Power supply should be able to provide 1.5 times the typical current or 1.2 times the maximum current (whichever is greater).

In most cases, RF - Lambda amplifiers will withstand severe mismatches without damage. However, operation with poor loads is discouraged. If prolonged operation with poor or unknown loads is expected, an external device such as an isolator or circulator should be used to protect the amplifier.

Ensure that the power is off when connecting or disconnecting the input or output of the amp.

Prevent overdriving the amplifier. Do not exceed the recommended input power level.

Adequate heat-sinking required for RF amplifier modules. Please inquire.

Amplifiers do not contain Thermal protection, Reverse DC polarity or Over voltage protection with the exception of a few models. Please inquire.

Proper electrostatic discharge (ESD) precautions are recommended to avoid performance degradation or loss of functionality.

What is not covered with warranty?

Each RF - Lambda amplifier will go through power and temperature stress testing.

Since the die, ICs or MMICs are fragile, these are not covered by warranty. Any damage to these will NOT be free to repair.




RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

RFLUPA05M03GB

Outline Drawing:

All Dimensions in mm [inches]

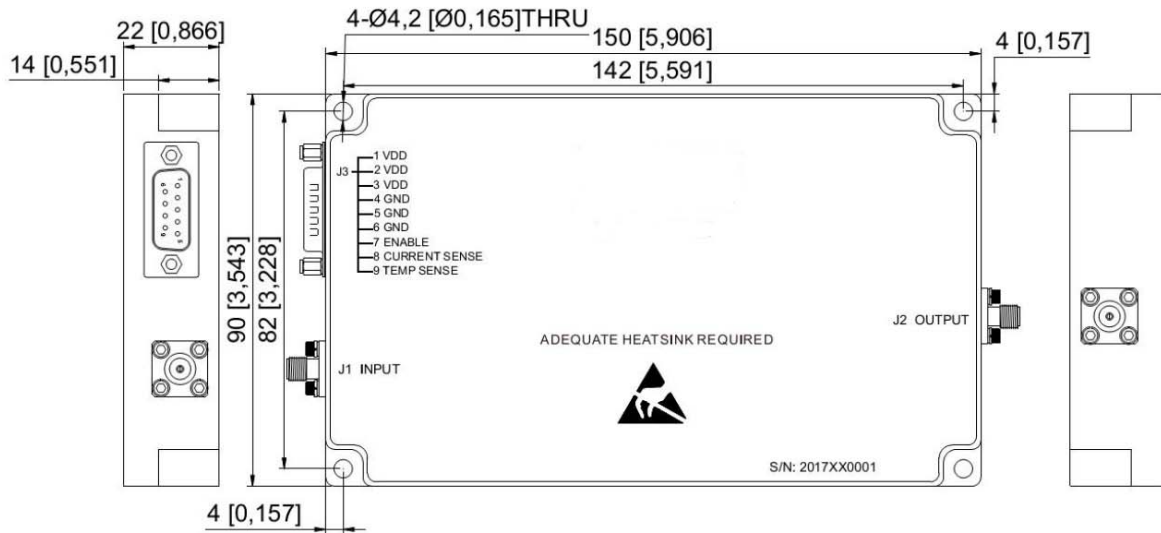

Heat Sink required during operation(Sold Separately)



Ordering Information

Part No.	ECCN	Description
RFLUPA05M03GB	EAR99	0.5-3GHz Power Amplifier

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

100W Wide Band Power Amplifier 0.5GHz~3GHz