



RF-LAMBDA

The power beyond expectations

RAMP00G06GA

25W Wide Band Power Amplifier 20-6000MHz



Features

- Wideband Solid State Power Amplifier
- Psat: +45dBm
- Gain: 50dB
- Supply Voltage: 110/220 VAC

Typical Applications

- Wireless Infrastructure
- Short Haul / High Capacity Links
- RF Microwave and Vsat
- Military & Aerospace Applications
- Test Instrumentation

Electrical Specifications, $T_A = 25^\circ\text{C}$

Parameter	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Frequency Range	0.02 – 1			2 – 6			GHz
Gain		57			46		dB
Gain Flatness		±7			±5		dB
Gain Variation Over Temperature (-45 ~ +85)		±3			±3		dB
Input Return Loss		10			10		dB
Output Return Loss		20			20		dB
Saturated Output Power (Psat)		45			45		dBm
Supply Current (110/220 VAC)		0.5	2		0.5	2	A
Isolation S12		75			75		dB
Input Max Power (No Damage)	Psat – Gain			Psat – Gain			dBm
Weight	≈ 8000						g
Impedance	50						Ohms
Input / Output Connectors	SMA - Female						
Finishing	Painted Black Finish						
Material	Aluminum / Copper						

*** To achieve best/most reliable performance, keep case temperature below 38 degrees Celsius. Extra cooling on case is required

* P1dB, P3dB and Psat power testing signal: 200μs pulse width with 10% duty cycle.

* For average CW power testing, a 5dB back off from Psat is required unless water/oil cooling system is applied.



RF-LAMBDA

The power beyond expectations

RAMP00G06GA

Absolute Maximum Ratings	
Supply Voltage	110/220 VAC
RF Input Power (RFIN) Pin max = Psat - Gainsat	Psat – Gain
Storage Temperature (°C)	-50 to +125

Note: Maximum RF input power is set to assure safety of amplifier. Input power may be increased at own risk to achieve full power of amplifier. Please reference gain and power curves

Biasing Up Procedure	
Step 1	Connect input and output with 50 Ohm source/load. (in band VSWR<1.9:1 or >10dB return loss)
Step 2	Connect AC plug
Step 3	Flip switch to “ON” position
Power OFF Procedure	
Step 1	Flip switch to “OFF” position
Step 2	Remove AC plug
Step 3	Remove RF Connection

Environmental specifications	
Operational Temperature (°C)	-45 ~ +55 (Case Temperature must be less than 55°C all time)
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMSs (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msc half sine wave, 3 axis both directions

Note: The operating temperature for the unit is specified at the package base. It is the user's responsibility to ensure the part is in an environment capable of maintaining the temperature within the specified limits

Ordering Information	
Part No.	Description
RAMP00G06GA	0.02GHz~6GHz Power Amplifier

Amplifier Use

Ensure that the amplifier input and output ports are safely terminated into a proper 50 ohm load before turning on the power. Never operate the amplifier without a load. A proper 50 ohm load is defined as a load with impedance less than 1.9:1 or return loss larger than 10dB relative to 50 Ohm within the specified operating band width.

Power Supply Requirements

Power supply must be able to provide adequate current for the amplifier. Power supply should be able to provide 1.5 times the typical current or 1.2 times the maximum current (whichever is greater).

In most cases, RF-Lambda amplifiers will withstand severe mismatches without damage. However, operation with poor loads is discouraged. If prolonged operation with poor or unknown loads is expected, an external device such as an isolator or circulator should be used to protect the amplifier.

Ensure that the power is off when connecting or disconnecting the input or output of the amp.

Prevent overdriving the amplifier. Do not exceed the recommended input power level.

Adequate heat-sinking required for RF amplifier modules. Please inquire.

Amplifiers do not contain Thermal protection, Reverse DC polarity or Over voltage protection with the exception of a few models. Please inquire.

Proper electrostatic discharge (ESD) precautions are recommended to avoid performance degradation or loss of functionality.

What is not covered with warranty?

Each of RF-Lambda amplifiers will go through power and temperature stress testing.

Due to fragile of the die, IC or MMIC, those are not covered by warranty. Any damage to those will NOT be free to repair.

25W Ultra Wide Band Power Amplifier 0.02-6.0GHz




RF-LAMBDA


The power beyond expectations

RAMP00G06GA


Gain vs. Frequency

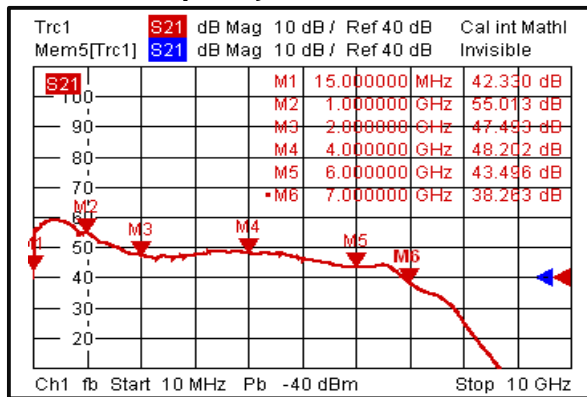


Input Return Loss

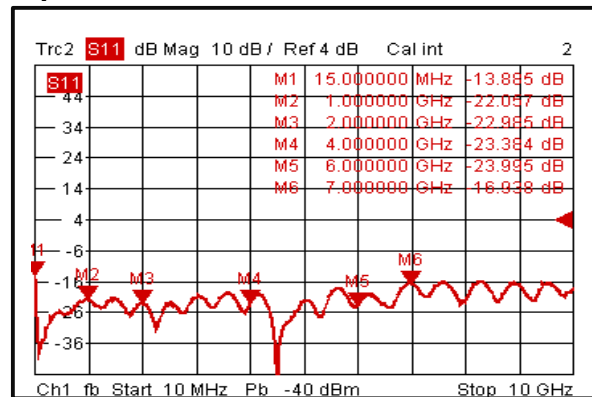

Isolation

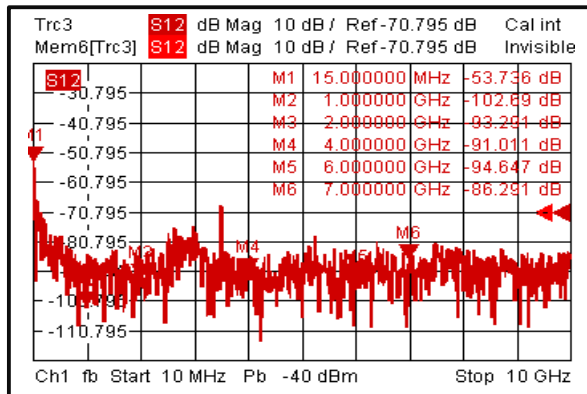

Output Return Loss

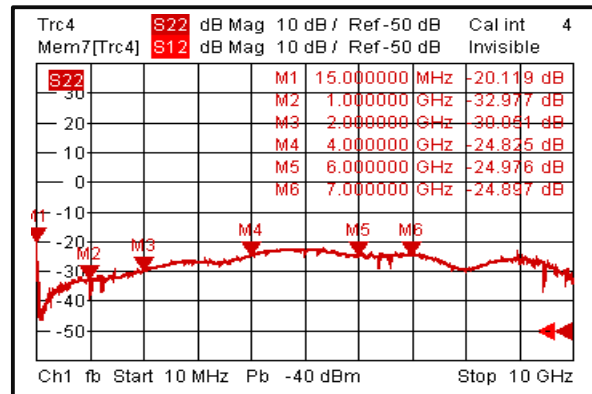

Note: Input/output return loss measurements include attenuators to protect equipment

25W Ultra Wide Band Power Amplifier 0.02-6.0GHz




RF-LAMBDA


The power beyond expectations

RAMP00G06GA


Gain vs. Output Power 0.2-1.8 GHz

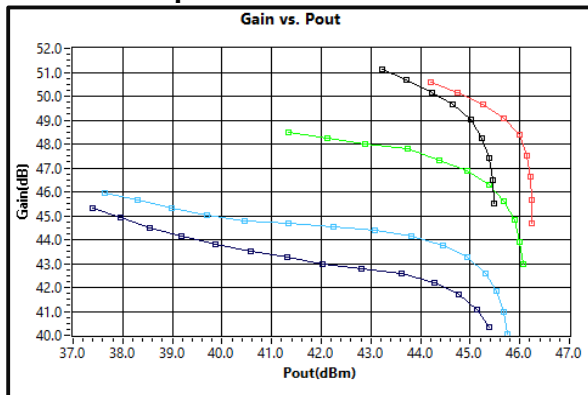


P7dB vs. Frequency 0.2-1.8 GHz

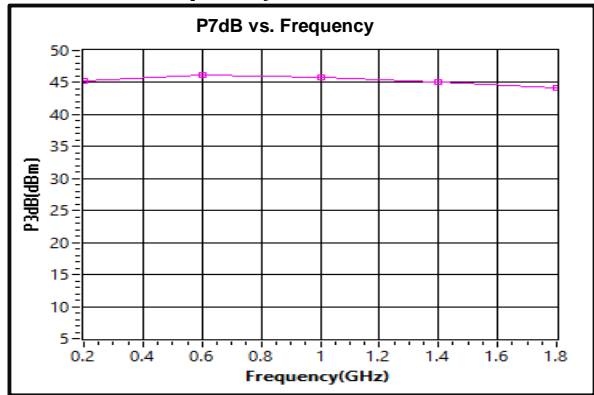



2nd Harmonic Wave Power 0.2-1.8 GHz

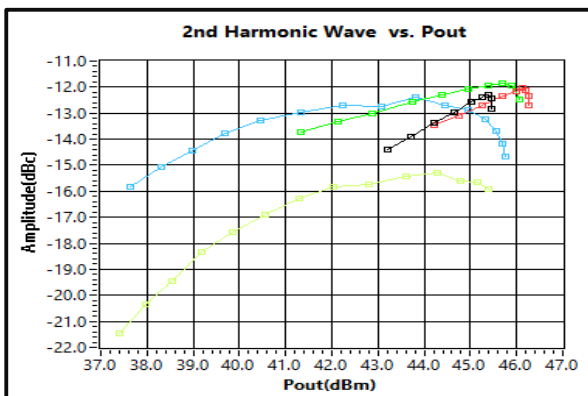

3rd Harmonic Wave Power 0.2-1.8 GHz

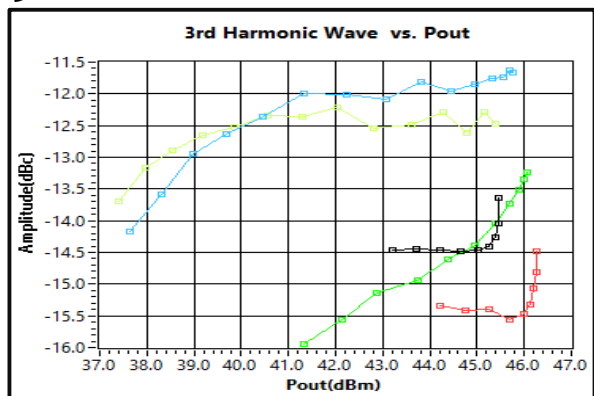

4th Harmonic Output Power 0.2-1.8 GHz

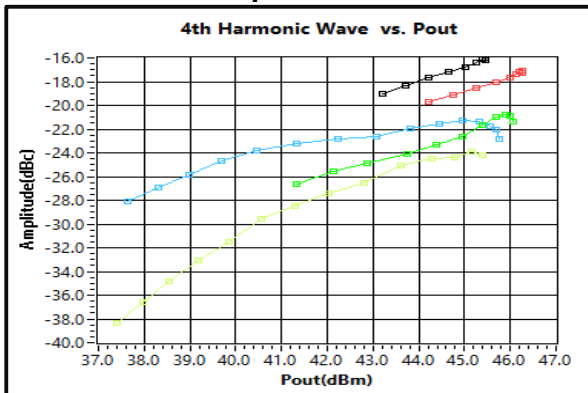

* P1dB, P3dB and Psat power testing signal: 200μs pulse width with 10% duty cycle.

* For average CW power testing, a 5dB back off from Psat is required unless water/oil cooling system is applied.

25W Ultra Wide Band Power Amplifier 0.02-6.0GHz




RF-LAMBDA


The power beyond expectations

RAMP00G06GA



Left IM3 0.2-1 GHz

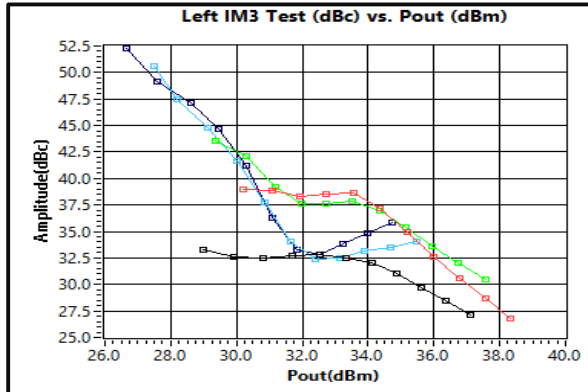

Right IM3 0.2-1 GHz

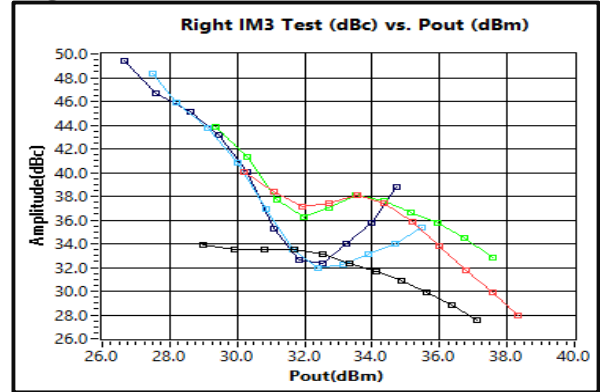

Memory Effect 0.2-1 GHz

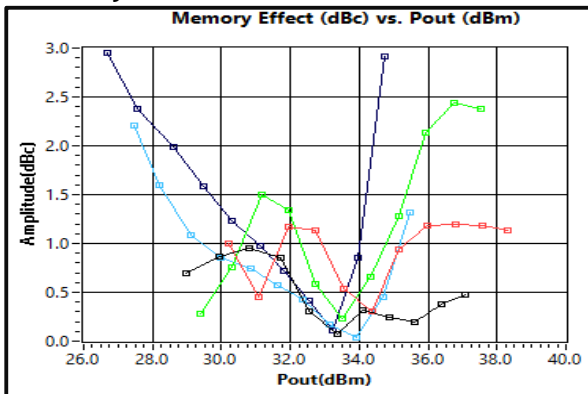

25W Ultra Wide Band Power Amplifier 0.02-6.0GHz




RF-LAMBDA


The power beyond expectations

RAMP00G06GA


Gain vs. Output Power 2-6 GHz

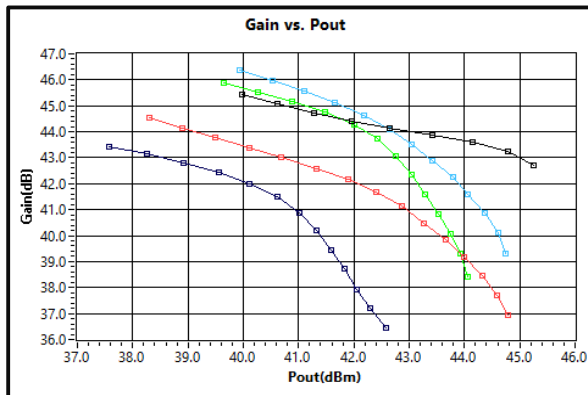


P7dB vs. Frequency 2-6 GHz

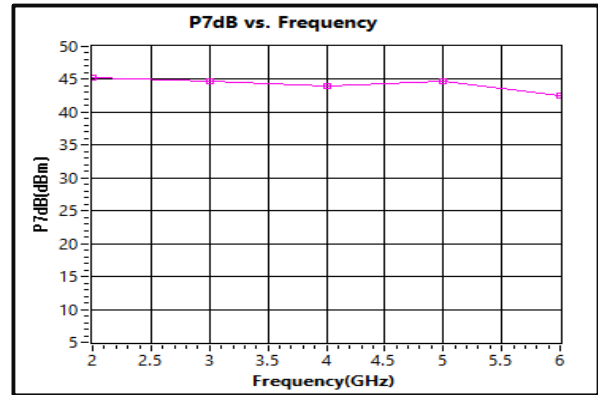



2nd Harmonic Wave Power 2-6 GHz

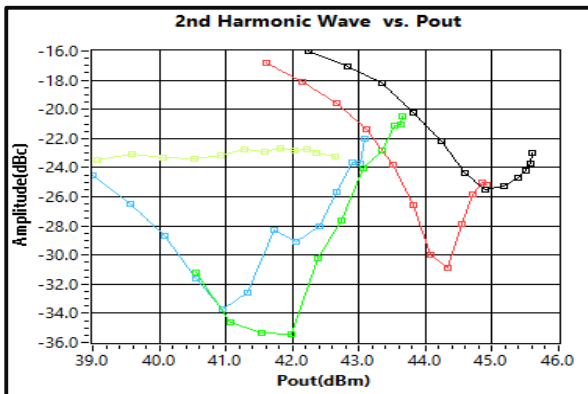

3rd Harmonic Wave Power 2-6 GHz

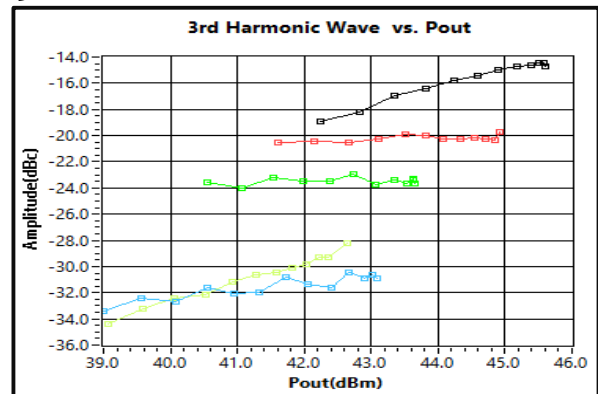

4th Harmonic Output Power 2-6 GHz

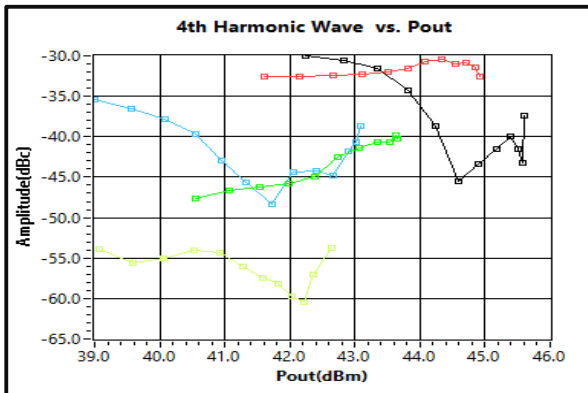

* P1dB, P3dB and Psat power testing signal: 200μs pulse width with 10% duty cycle.

* For average CW power testing, a 5dB back off from Psat is required unless water/oil cooling system is applied.

25W Ultra Wide Band Power Amplifier 0.02-6.0GHz




RF-LAMBDA


The power beyond expectations

RAMP00G06GA


Left IM₃ 2-6 GHz

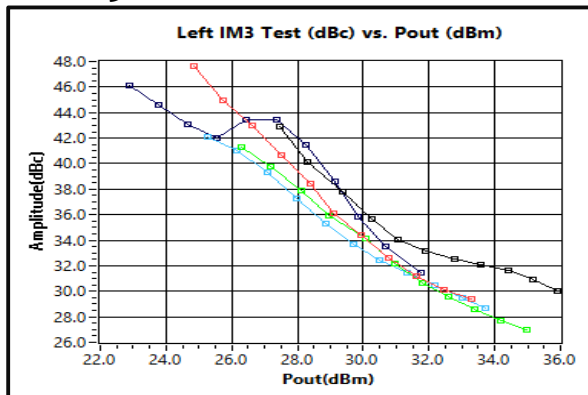

Right IM₃ 2-6 GHz

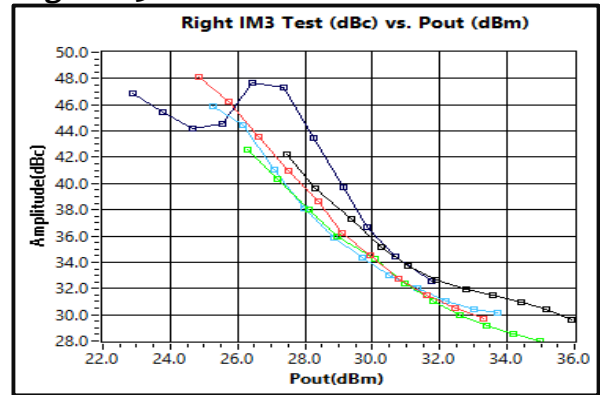

Memory Effect 2-6 GHz

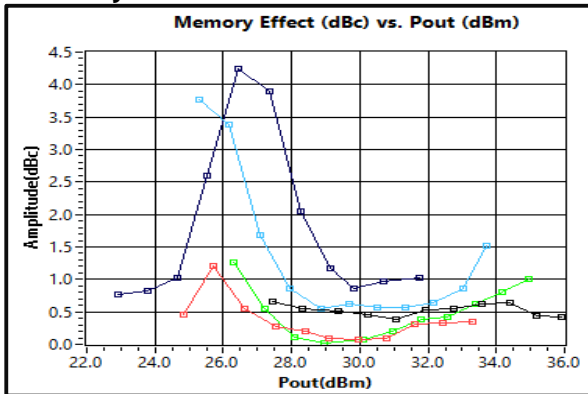

25W Ultra Wide Band Power Amplifier 0.02-6.0GHz




RF-LAMBDA




The power beyond expectations

RAMP00G06GA


CW Input Gain vs Output Power 2-6 GHz

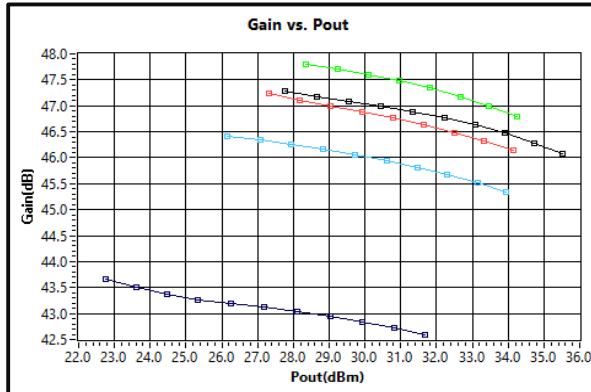


CW P1dB 2-6GHz

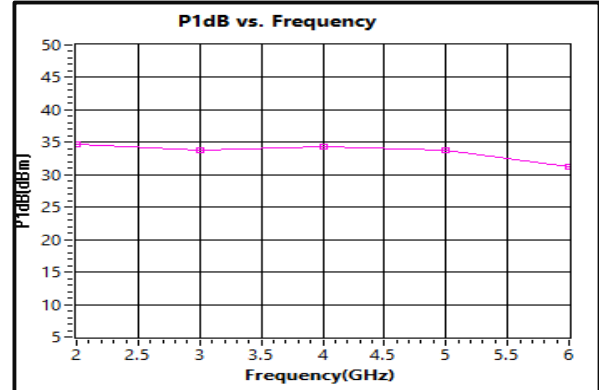

Noise Figure vs. Frequency

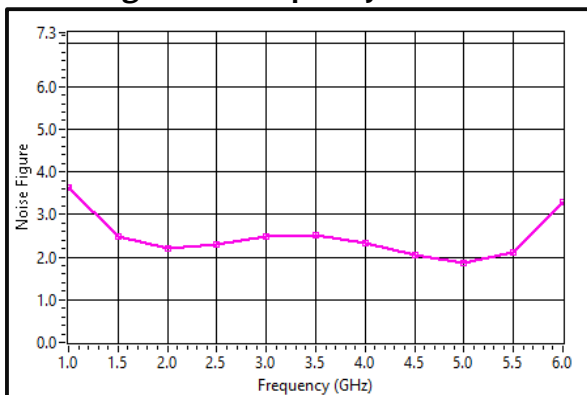

Max CW Output Power

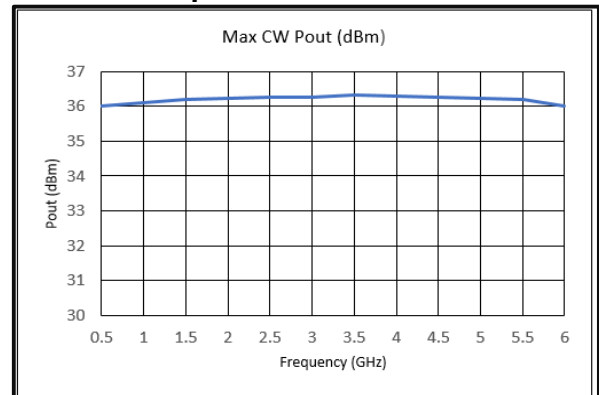

*Case temperature must not exceed 38 degree C

25W Ultra Wide Band Power Amplifier 0.02-6.0GHz




RF-LAMBDA

The power beyond expectations

RAMP00G06GA

Outline Drawing:

All Dimensions in mm

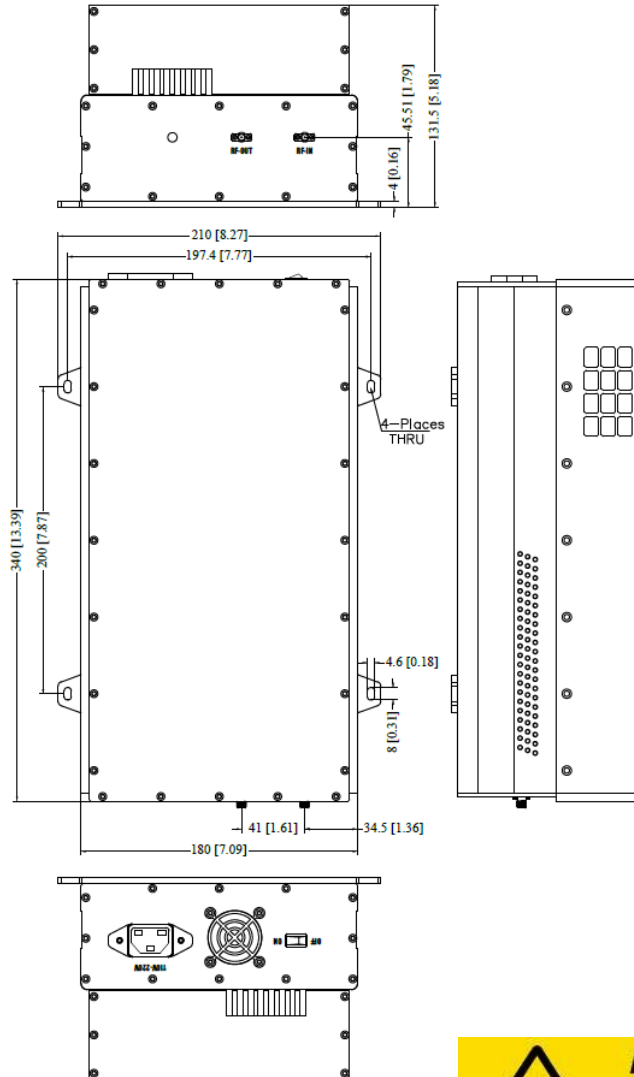

Heat Sink and cooling fan required during operation



Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.