



RF-LAMBDA

LEADER OF BROADBAND SOLUTIONS

RFPSHT0102D6

Digital Non-Dispersive 360° Phase Shifter 1.7-1.975GHz



Features

- Wide Band Operation 1.7-1.975GHz
- 360° Phase Shift
- Fast Switching Speed
- Temperature Range -45°C~+85°C
- Customization available upon request
- Hermetically sealed package up to 60,000ft available upon request.

Electrical Specifications, TA = +25° C, With Vdd = +5V, Vss = -5V & VCTL = 0/ +5V

Description	PN:RFPSHT0102D6			
	Digital Non-Dispersive Phase Shifter			
Parameters	Min	Typ.	Max	Units
Frequency Range	1.7~1.975			GHz
Phase Range		360		°
Insertion Loss		4.5	5	dB
Insertion Loss Temperature Coefficient		0.01		dB/°C
Phase Flatness		±2.5	±3	°
Input VSWR		1.7	2	ratio
Output VSWR		1.8	2	ratio
RF Input power (CW)			0.5	W
Power Dissipation (CW)		0.4		W
Input Power for 1 dB Compression		25		dBm
Input IP3		40		dBm
Weight	3.5			Ounces
Impedance	50			Ω
Biasing (+5V/-5V)	5/5			mA
Input /Output Connector	SMA-Female (Standard)			
Control PIN	MICRO-D9 Female			
Finishing	Gold Plating			
Material	Aluminum			
Seal	Hermetically Sealed (optional)			

Digital Control Phase Shifter 1.7-1.975GHz



RF-LAMBDA

LEADER OF BROADBAND SOLUTIONS

RFPSHT0102D6

Absolute Maximum Ratings

Biasing	+5V±10%/-5V±10%
TTL Control Voltage	0~0.8V/2~5V
Operating Temperature(°C)	-45 ~ +85
Storage Temperature(°C)	-50 ~ +125

Ordering Information


Part No	ECCN	Description
RFPSHT0102D6	EAR99	1.7-1.975GHz Digital Control Phase Shifter

Environment specifications


Operational Temperature (°C)	-45 ~ +85
Storage Temperature (°C)	-50 ~ +125
Altitude	30,000 ft. (Epoxy Seal Controlled environment) 60,000 ft 1.0psi min (Hermetically Seal Un-controlled environment) (Optional)
Vibration	25g rms (15 degree 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35c, 95%RH at 40 deg c
Shock	20G for 11msc half sin wave,3 axis both directions

performance plots


Insertion Loss

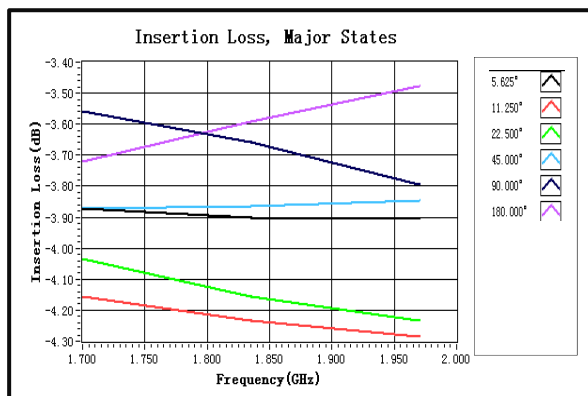


Input Return Loss vs. Frequency

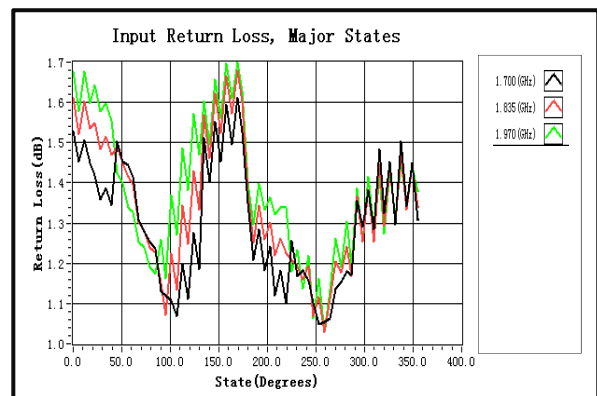

Output Return Loss vs. Frequency

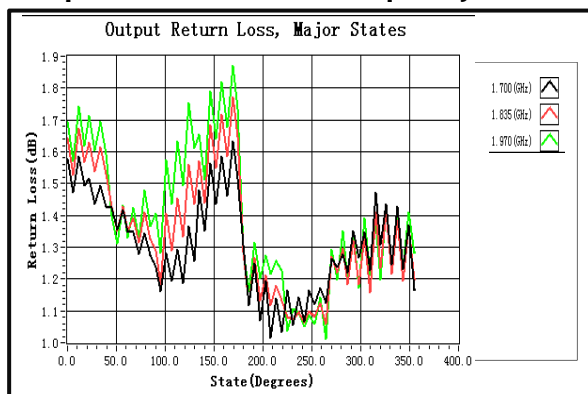

Normalized Loss . All States

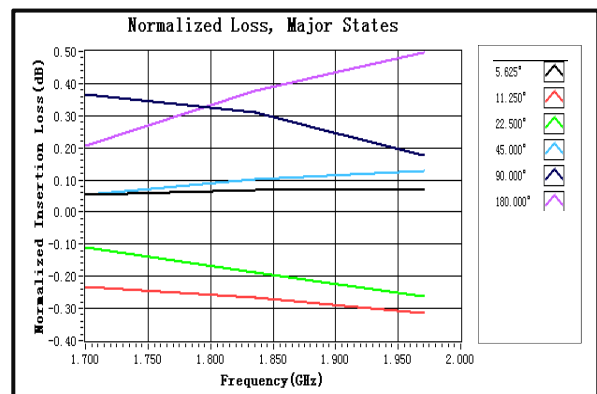

Digital Control Phase Shifter 1.7-1.975GHz




RF-LAMBDA


LEADER OF BROADBAND SOLUTIONS

RFPSHT0102D6


Relative Phase Shift vs. Frequency

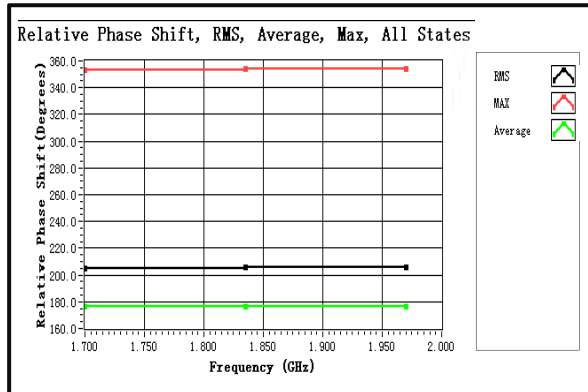

Phase Error vs. Frequency

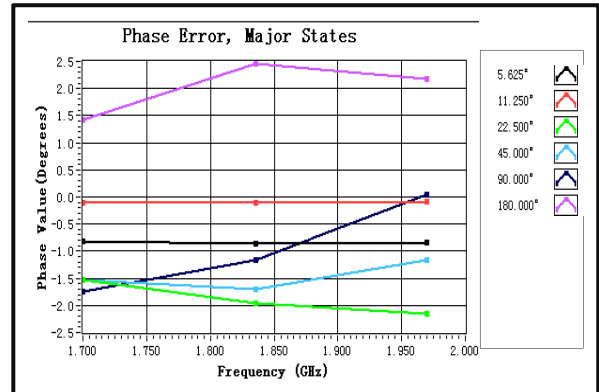

Phase Error vs. State

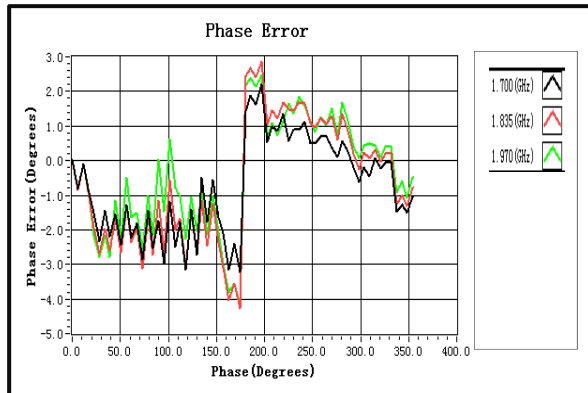


Output Third Order Intercept (IP3)



Outline Drawing:

All Dimensions in mm (inches)

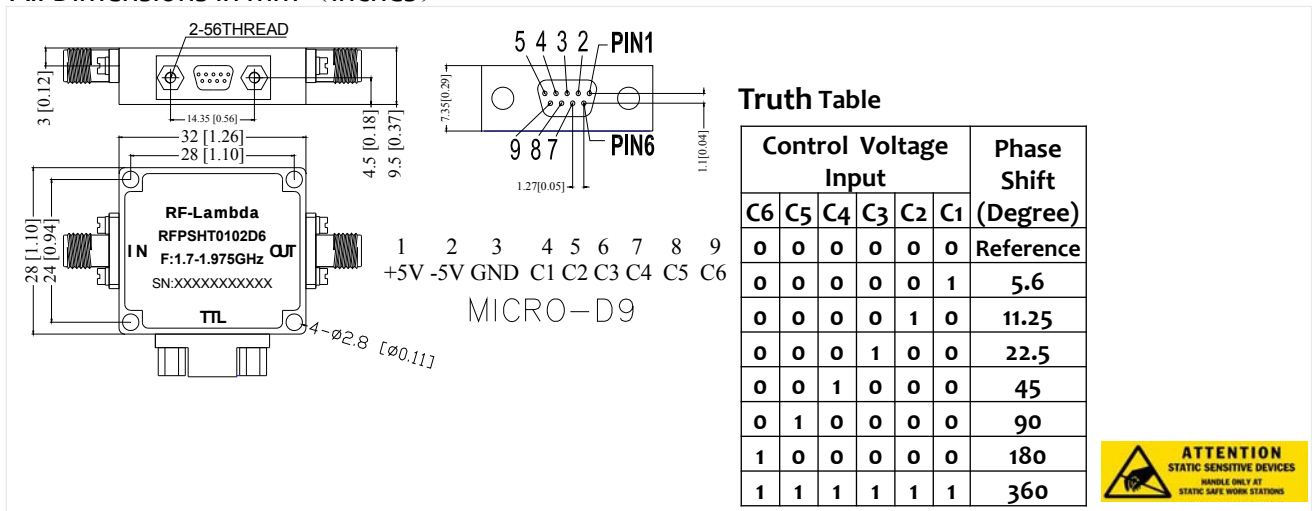

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.