


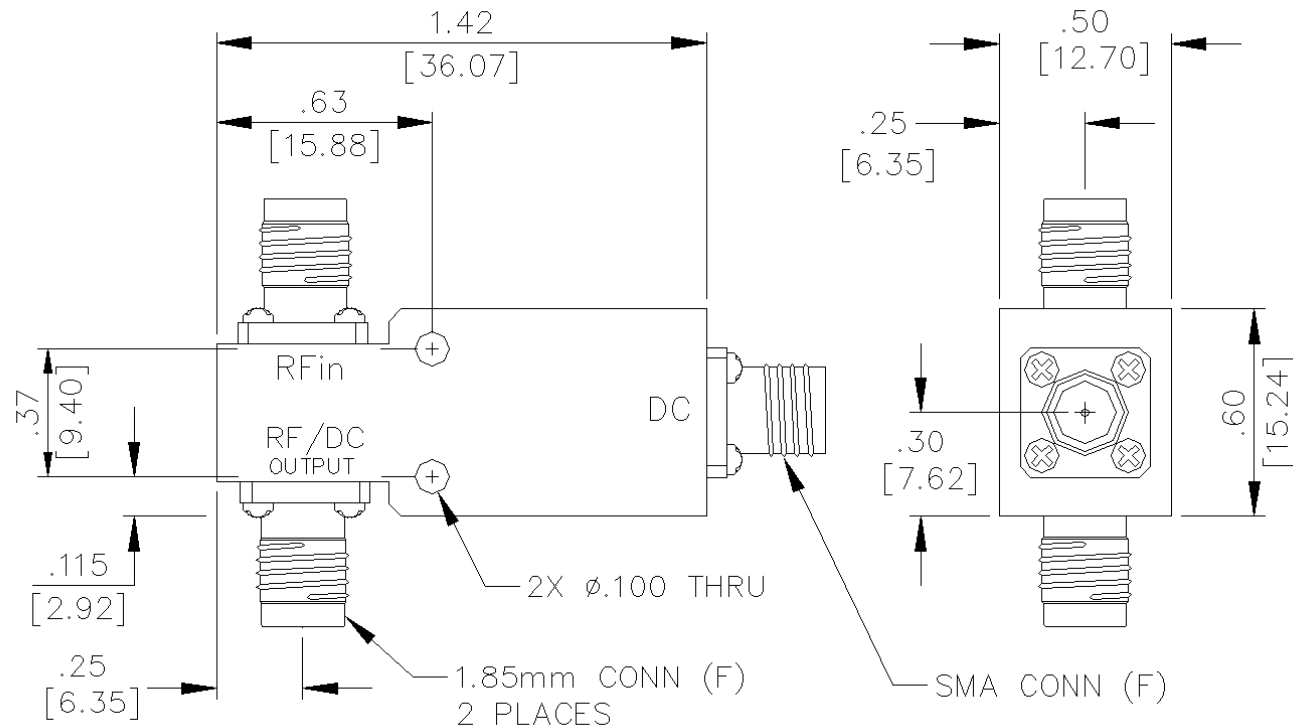

SPECIFICATIONS

Frequency Range:	30 KHz - 70 GHz
Isolation:	30 dB Min
Insertion Loss:	3.0 dB Typ, 4.0 dB Max
Current:	500 mA Max
Power:	1 Watt Max
Voltage:	25 Vdc Max
VSWR:	2.00:1 Typ
Connectors:	
RF In (DC Blocked):	1.85 mm
RF/DC Output:	1.85 mm
DC In (Bias):	SMA

PULSAR MICROWAVE CORPORATION

PULSAR MICROWAVE CORPORATION
48 INDUSTRIAL WEST, CLIFTON NJ 07012
TEL: 973-779-6262 FAX: 973-779-2727
WWW.PULSARMICROWAVE.COM

DESCRIPTION :

Bias Tee

MODEL NO. :

BT-54-401S

DIMENSIONS ARE IN INCHES
DECIMAL TOLERANCE:
2 PLACE $\pm$.02
3 PLACE $\pm$.010

SIZE
A

CAGE CODE :
0HR85

REV CODE :
170221

SCALE : N / A

ALL SPECIFICATIONS ARE SUBJECT TO
CHANGE WITHOUT NOTICE AT ANY TIME

SHEET 1 OF 1