


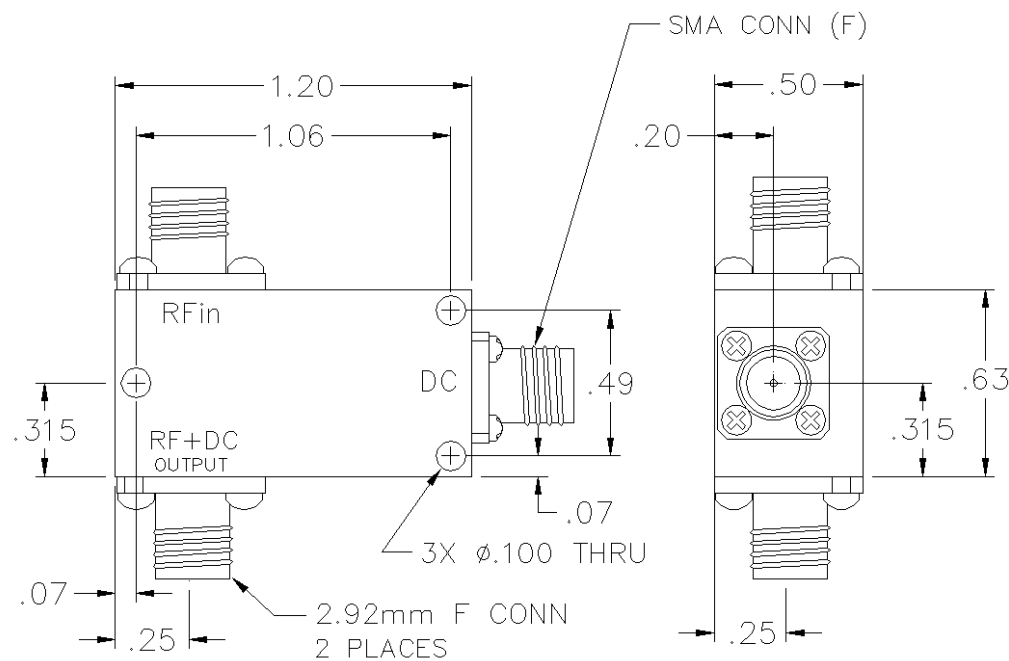

SPECIFICATIONS

Frequency Range: 30 kHz - 40 GHz
 Isolation: 30 dB Min
 Insertion Loss: 3.0 dB Max
 Current¹: 500 mA Max
 Power: 1 Watt Max
 Voltage: 25 Vdc Max
 VSWR: 1.80:1 Max

Notes:

- Higher current and isolation requirements available.

PULSAR MICROWAVE CORPORATION

PULSAR MICROWAVE CORPORATION
 48 INDUSTRIAL WEST, CLIFTON NJ 07012
 TEL: 973-779-6262 FAX: 973-779-2727
 WWW.PULSARMICROWAVE.COM

DESCRIPTION :

Bias Tee

MODEL NO. :

BT-50-400S

DIMENSIONS ARE IN INCHES
 DECIMAL TOLERANCE:
 2 PLACE $\pm .02$
 3 PLACE $\pm .010$

SIZE
A

CAGE CODE :
0HR85

REV CODE :
171024

SCALE : N / A

ALL SPECIFICATIONS ARE SUBJECT TO
CHANGE WITHOUT NOTICE AT ANY TIME

SHEET 1 OF 1