OPA355-Q1 200MHz CMOS 运算放大器，具有关断功能

1 特性

- 符合汽车类应用的 要求
- 具有符合 AEC-Q100 标准的下列特性
  - 器件温度 1 级：-40℃ 至 +125℃ 的环境运行温度范围
  - 器件 HBM ESD 分类等级 2
  - 器件 CDM ESD 分类等级 C4B
- 单位增益带宽：450MHz
- 宽带宽：200MHz GBW
- 高转换率：360V/μs
- 低噪声：5.8 nV/$\sqrt{Hz}$
- 出色的视频性能：
  - 差分增益：0.02%
  - 差分相位：0.05° (0.1dB)
  - 增益平坦度：75MHz
- 输入范围包括接地
- 轨至轨输出（在 100mV 以内）
- 低输入偏置电流：3pA
- 低关断电流：3.4μA
- 启用和禁用时间：100ns 和 30ns
- 热关断
- 单电源工作电压范围：2.5V 至 5.5V
- *Micro*SIZE 封装

2 应用

- 汽车
- 有源滤波器
- 高速积分器
- 模数转换器 (ADC) 输入缓冲器
- 数模转换器 (DAC) 输出放大器

3 说明

OPA355-Q1 器件是一款高速电压反馈 CMOS 运算放大器，专为需要宽带宽的 应用 而设计。OPA355-Q1 器件单位增益稳定并且可驱动大输出电流。此外，OPA355-Q1 器件具有一个数字关断（使能）功能。这个特性在空闲期间提供节电功能，并将输出置于高阻抗状态，以支持输出复用。差分增益为 0.02%，而差分相位为 0.05°。每通道的静态电流为 8.3mA。


OPA355-Q1 针对低至 2.5V (±1.25V) 和高达 5.5V (±2.75V) 的单电源或双电源供电运行进行了优化。针对 OPA355-Q1 器件的共模输入范围扩展至低于接地电压 100mV 以下和高达 V+ 以上 1.5V。电源轨的输出摆幅在 100mV 以内，从而支持宽动态范围。

OPA355-Q1 器件采用单 SOT-23-6 封装，具有 –40°C 至 +125°C 的扩展温度范围。

器件信息(1)

器件型号	封装	封装尺寸（标称值）
OPA355-Q1	SOT-23 (6)	2.90mm × 1.60mm

(1) 如需了解所有可用封装，请参阅数据表末尾的可订购产品附录。



本文档旨在为方便起见，提供有关 TI 产品中文版本的信息，以确认产品的概要。 有关适用的官方英文版本的最新信息，请访问 www.ti.com，其内容始终优先。 TI 不保证翻译的准确性和有效性。 在实际设计之前，请务必参考最新版本的英文版本。

目录

1 特性 1
2 应用 1
3 说明 1
4 修订历史记录 2
5 **Device Comparison Table** 3
5.1 Device Comparison Table 3
6 **Pin Configuration and Functions** 3
7 **Specifications** 4
7.1 Absolute Maximum Ratings 4
7.2 ESD Ratings 4
7.3 Recommended Operating Conditions 4
7.4 Thermal Information 4
7.5 Electrical Characteristics 5
7.6 Typical Characteristics 7
8 **Detailed Description** 12
8.1 Overview 12
8.2 Functional Block Diagram 12
8.3 Feature Description 12
8.4 Device Functional Modes 13
9 **Application and Implementation** 14
9.1 Application Information 14
9.2 Typical Applications 14
10 **Power Supply Recommendations** 19
11 **Layout** 19
11.1 Layout Guidelines 19
11.2 Layout Example 19
12 器件和文档支持 20
12.1 商标 20
12.2 静电放电警告 20
12.3 术语表 20
13 机械、封装和可订购信息 20

4 修订历史记录

Changes from Revision B (June 2014) to Revision C **Page**

- Deleted "C55" marking on pinout drawing in *Pin Configuration and Functions* section 3
- Added Pin Functions table to *Pin Configuration and Functions* section 3
- Deleted storage temperature range from *ESD Ratings* table and moved to *Absolute Maximum Ratings* table 4
- Changed title of *Handling Ratings* table to *ESD Ratings* table 4
- Added *Recommended Operating Conditions* table 4
- 已添加 *Functional Block Diagram* 12
- 已删除 "Independent enable pins are available for each channel, which provide maximum design flexibility" from *Enable Function* section 12
- 已删除 *Input and ESD Protection* subsection in *Feature Description* section 13
- 已添加 *Device Functional Modes* section 13
- 已添加 *Typical Applications* section to *Application and Implementation* section 14
- 已添加 *Design Requirements* subsection to *Typical Applications* section 14
- 已添加 *Detailed Design Procedure* subsection to *Typical Application* section 14
- 已添加 application curves to the *Typical Application* section 16
- 已添加 *High-Impedance Sensor Interface*, *Driving ADCs*, and *Active Filter* subsections to *Typical Application* section 16
- 已添加 *Power Supply Recommendations* section 19
- 已添加 layout example image to *Layout* section 19

Changes from Revision A (December 2013) to Revision B **Page**

- 已更改 器件状态从 *产品预览* 更改为 *量产数据* 1

Copyright © 2013–2018, Texas Instruments Incorporated


5 Device Comparison Table

5.1 Device Comparison Table

OPA355-Q1 RELATED PRODUCTS	FEATURES
OPA356	200-MHz, Rail-to-Rail Output, CMOS, No Shutdown
OPAx350	38-MHz, Rail-to-Rail Input and Output, CMOS
OPAx631	75-MHz, Rail-to-Rail Output
OPAx634	150-MHz, Rail-to-Rail Output
THS412x	Differential Input and Output, 3.3-V Supply

6 Pin Configuration and Functions

DBV Package
6-Pin SOT-23
Top View

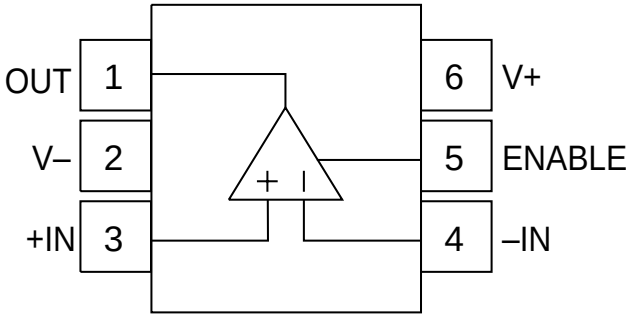

Pin 1 of the SOT-23-6 is determined by orienting the package marking as indicated in the diagram.

Pin Functions

PIN		I/O	DESCRIPTION
NAME	NO.		
ENABLE	5	—	Amplifier power down. Low = disabled, high = normal operation (pin must be driven) .
IN+	3	I	Noninverting input pin
IN–	4	I	Inverting input pin
OUT	1	O	Output pin
V+	6	—	Positive power supply
V–	2	—	Negative power supply

Copyright © 2013–2018, Texas Instruments Incorporated

7 Specifications

7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1)

		MIN	MAX	UNIT
Supply voltage	V+ to V–		7.5	V
Signal input terminals	Voltage	(V–) – 0.5	(V+) + 0.5	V
	Current		10	mA
Output short circuit(2)		Continuous		
Operating temperature		–55	150	°C
Junction temperature			160	°C
Lead temperature (soldering, 10 seconds)			300	°C
Storage temperature range, T_{stg}		–65	150	°C

(1) Stresses above *Absolute Maximum Ratings* may cause permanent damage. Exposure to absolute maximum conditions for extended periods may degrade device reliability. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those specified is not implied.
(2) Short-circuit to ground, one amplifier per package.

7.2 ESD Ratings

			MIN	MAX	UNIT
$V_{(ESD)}$ Electrostatic discharge	Human body model (HBM), per AEC Q100-002(1)			2000	V
	Charged device model (CDM), per AEC Q100-011	Corner pins (1, 3, 4, and 6)		750	
		Other pins		500	

(1) AEC Q100-002 indicates HBM stressing is done in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

	MIN	NOM	MAX	UNIT
V_S Total supply voltage	2.7		5.5	V
T_A Ambient temperature	–40	25	125	°C

7.4 Thermal Information

THERMAL METRIC(1)		OPA355-Q1 DBV (SOT-23) 6 PINS	UNIT
$R_{\theta JA}$	Junction-to-ambient thermal resistance	187.3	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	126.5	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	32.6	°C/W
ψ_{JT}	Junction-to-top characterization parameter	24.1	°C/W
ψ_{JB}	Junction-to-board characterization parameter	32.1	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	N/A	°C/W

(1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report.

Copyright © 2013–2018, Texas Instruments Incorporated

7.5 Electrical Characteristics

V_S = 2.7 V to 5.5 V (single-supply). At T_A = 25°C, R_F = 604 Ω, R_L = 150 Ω, and connected to V_S / 2, (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
OFFSET VOLTAGE							
V_{OS}	Input offset voltage	V_S = 5 V	T_A = 25°C		±2	±9	mV
			T_A = –40°C to +125°C			±15	
DV_{OS}/dT	Input offset voltage vs temperature	T_A = 25°C					µV/°C
		T_A = –40°C to +125°C			±7		
PSRR	Input offset voltage vs power supply	V_S = 2.7 to 5.5 V, V_{CM} = V_S / 2 – 0.15 V	T_A = 25°C		±80	±350	µV/V
			T_A = –40°C to +125°C				
INPUT BIAS CURRENT							
I_B	Input bias current	T_A = 25°C			3	±50	pA
		T_A = –40°C to +125°C				±50	
I_{OS}	Input offset current	T_A = 25°C			±1		pA
		T_A = –40°C to +125°C					
NOISE							
e_n	Input noise voltage density	f = 1 MHz	T_A = 25°C		5.8		$nV/\sqrt{Hz}$
			T_A = –40°C to +125°C				
i_n	Current noise density	f = 1 MHz	T_A = 25°C		50		$fA/\sqrt{Hz}$
			T_A = –40°C to +125°C				
INPUT VOLTAGE RANGE							
V_{CM}	Common-mode voltage range	T_A = 25°C		(V–) – 0.1		(V+) – 1.5	V
		T_A = –40°C to +125°C					
CMRR	Common-mode rejection ratio	V_S = 5.5 V, –0.1 V < V_{CM} < 4 V	T_A = 25°C	66	80		dB
			T_A = –40°C to +125°C	66			
INPUT IMPEDANCE							
	Differential	T_A = 25°C			10^{13} || 1.5		Ω || pF
		T_A = –40°C to +125°C					
	Common-mode	T_A = 25°C			10^{13} || 1.5		Ω || pF
		T_A = –40°C to +125°C					
OPEN-LOOP GAIN							
	Open-loop gain	V_S = 5 V, 0.3 V < V_O < 4.7 V	T_A = 25°C	84	92		dB
			T_A = –40°C to +125°C	80			
FREQUENCY RESPONSE							
f_{-3dB}	Small-signal bandwidth	G = 1, V_O = 100 mVp-p, R_F = 0 Ω, T_A = 25°C			450		MHz
		G = 2, V_O = 100 mVp-p, R_L = 50 Ω, T_A = 25°C			100		MHz
		G = 2, V_O = 100 mVp-p, R_L = 150 Ω, T_A = 25°C			170		MHz
		G = 2, V_O = 100 mVp-p, R_L = 1 kΩ, T_A = 25°C			200		MHz
GBW	Gain-bandwidth product	G = 10, R_L = 1 kΩ, T_A = 25°C			200		MHz
$f_{0.1\ dB}$	Bandwidth for 0.1-db gain flatness	G = 2, V_O = 100 mVp-p, R_F = 560 Ω, T_A = 25°C			75		MHz
SR	Slew rate	V_S = 5 V, G = 2, 4-V output step, T_A = 25°C			300 / –360		V/µs
	Rise and fall time	G = 2, V_O = 200 mVp-p, 10% to 90%, T_A = 25°C			2.4		ns
		G = 2, V_O = 2 Vp-p, 10% to 90%, T_A = 25°C			8		ns
	Settling time	V_S = 5 V, G = 2, 2-V output step, 0.1%, T_A = 25°C			30		ns
		V_S = 5 V, G = 2, 2-V output step, 0.01%, T_A = 25°C			120		ns
	Overload recovery time	V_I × G = V_S, T_A = 25°C			8		ns

Copyright © 2013–2018, Texas Instruments Incorporated

Electrical Characteristics (continued)

V_S = 2.7 V to 5.5 V (single-supply). At T_A = 25°C, R_F = 604 Ω, R_L = 150 Ω, and connected to V_S / 2, (unless otherwise noted)


PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
	Harmonic distortion	G = 2, f = 1 MHz, V_O = 2 Vp-p, R_L = 200 Ω T_A = 25°C (second harmonic)			–81		dBc
		G = 2, f = 1 MHz, V_O = 2 Vp-p, R_L = 200 Ω T_A = 25°C (third harmonic)			–93		dBc
	Differential gain error	NTSC, R_L = 150 Ω, T_A = 25°C			0.02%		
	Differential phase error	NTSC, R_L = 150 Ω, T_A = 25°C			0.05		°
OUTPUT							
	Voltage output swing from rail	V_S = 5 V, R_L = 150 Ω, A_{OL} > 84 dB			0.2	0.3	V
		V_S = 5 V, R_L = 1 kΩ			0.1		V
I_O	Output current (continuous) (1)				±60		mA
	Output current (peak) (1)	V_S = 5 V, T_A = 25°C			±100		mA
		V_S = 3 V, T_A = 25°C			±80		
	Closed-loop output impedance	f < 100 kHz			0.02		Ω
POWER SUPPLY							
V_S	Specified voltage range	T_A = 25°C		2.7		5.5	V
	Operating voltage range	T_A = 25°C			2.5 to 5.5		V
I_Q	Quiescent current (per amplifier)	V_S = 5 V, enabled; I_O = 0	T_A = 25°C		8.3	11	mA
			T_A = –40°C to +125°C			14	
SHUTDOWN							
	Logic-LOW threshold (2) (disabled)	T_A = 25°C				0.8	V
	Logic-HIGH threshold (2) (enabled)	T_A = 25°C		2			V
	Enable time	T_A = 25°C			100		ns
	Disable time	T_A = 25°C			30		ns
	Shutdown current (per amplifier)	V_S = 5 V, disabled, T_A = 25°C			3.4		µA
THERMAL SHUTDOWN							
	Junction temperature	Shutdown, T_A = 25°C			160		°C
		Reset from shutdown, T_A = 25°C			140		°C
	Specified range	T_A = 25°C		–40		125	°C
	Operating range	T_A = 25°C		–55		150	°C
	Storage range	T_A = 25°C		–65		150	°C

(1) See the *Output Voltage Swing vs Output Current* (图 21 and 图 23) in the *Typical Characteristics* section.
(2) Logic LOW and HIGH levels are CMOS logic compatible. They are referenced to V–.

版权 © 2013–2018, Texas Instruments Incorporated


7.6 Typical Characteristics

T_A = 25°C, V_S = 5 V, G = 2, R_F = 604 Ω, and R_L = 150 Ω connected to V_S / 2, (unless otherwise noted)

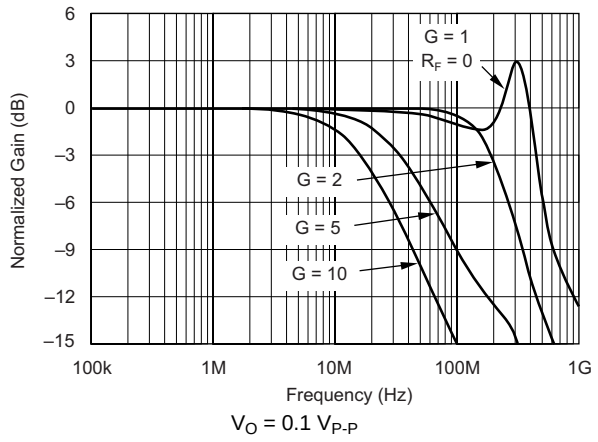


V_O = 0.1 V_{P-P}

图 1. Noninverting Small-Signal Frequency Response

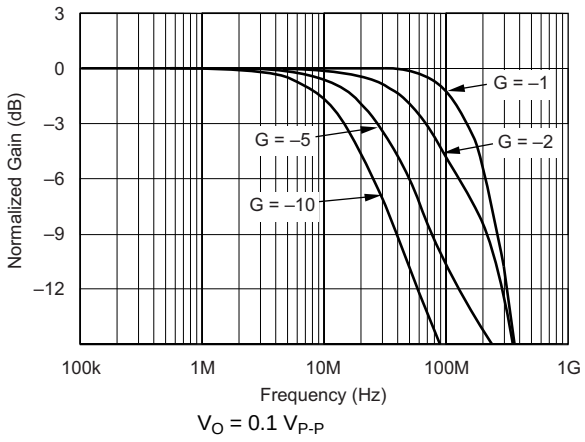


V_O = 0.1 V_{P-P}

图 2. Inverting Small-Signal Frequency Response

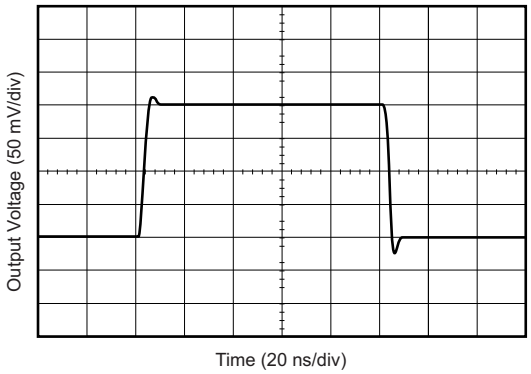

G = 2

图 3. Noninverting Small-Signal Step Response

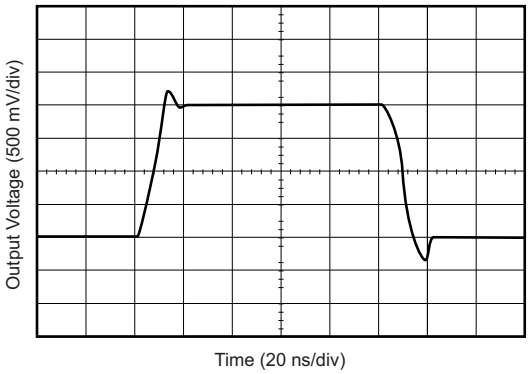

G = 2

图 4. Noninverting Large-Signal Step Response


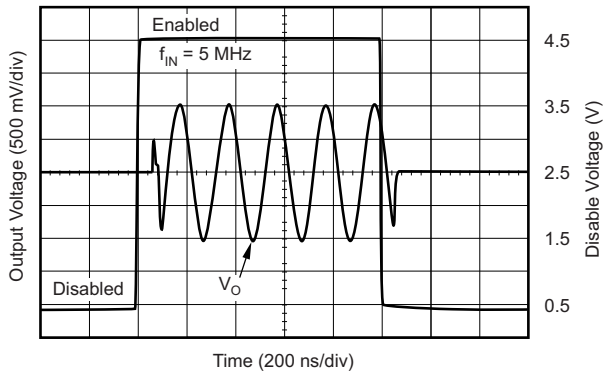


图 5. Large-Signal Disable and Enable Response

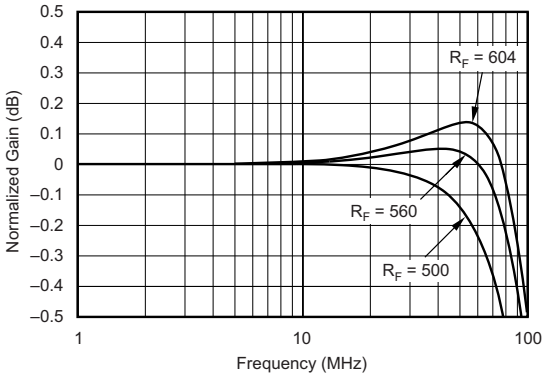


C_L = 0 pF V_O = 0.1 V_{P-P}

图 6. 0.1-dB Gain Flatness for Various R_F Values?


Typical Characteristics (接下页)

T_A = 25°C, V_S = 5 V, G = 2, R_F = 604 Ω, and R_L = 150 Ω connected to V_S / 2, (unless otherwise noted)

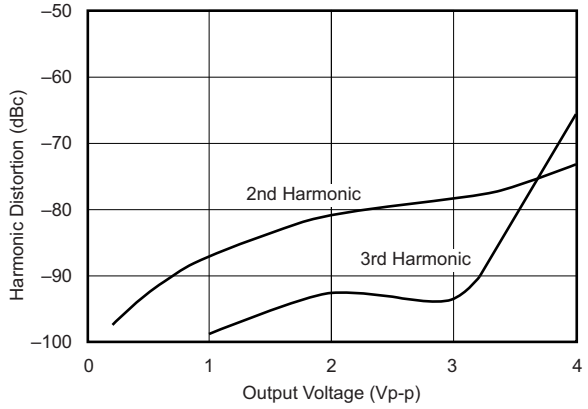


R_L = 200 f = 1 MHz

图 7. Harmonic Distortion vs Output Voltage

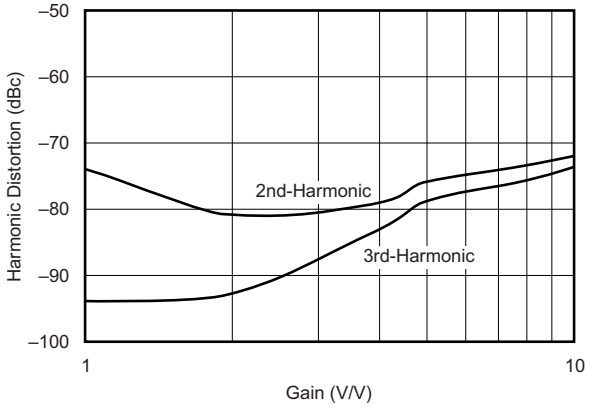


R_L = 200 V_O = 2 V_{P-P} f = 1 MHz

图 8. Harmonic Distortion vs Noninverting Gain

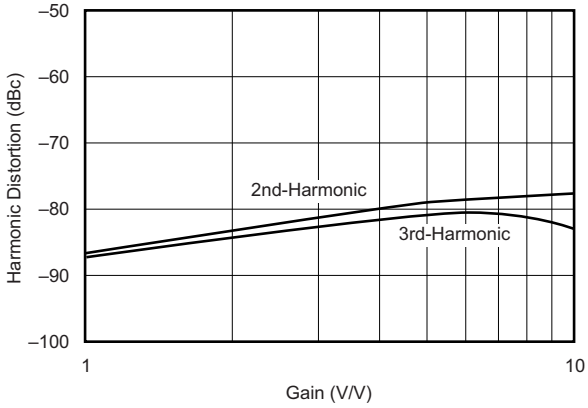


R_L = 200 V_O = 2 V_{P-P} f = 1 MHz

图 9. Harmonic Distortion vs Inverting Gain

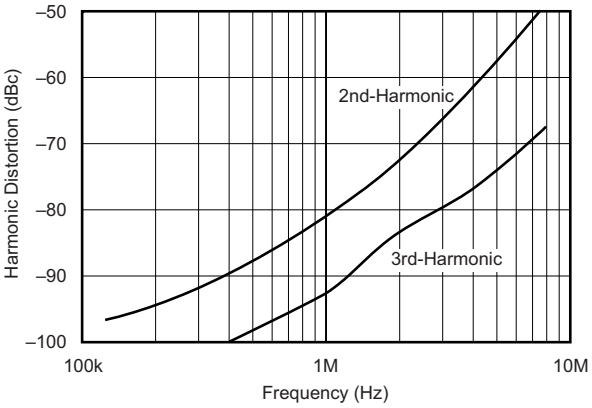

R_L = 200 V_O = 2 V_{P-P}

图 10. Harmonic Distortion vs Frequency

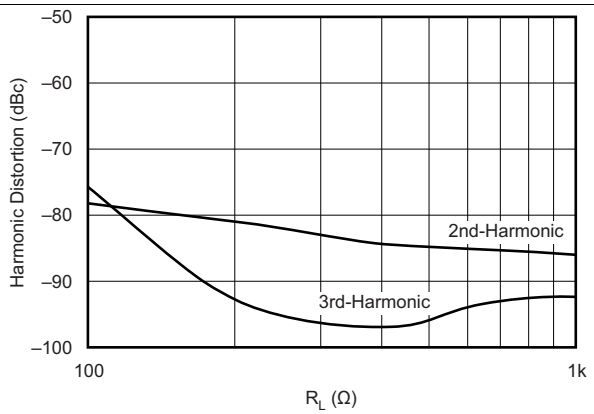

f = 1 MHz V_O = 2 V_{P-P}

图 11. Harmonic Distortion vs Load Resistance


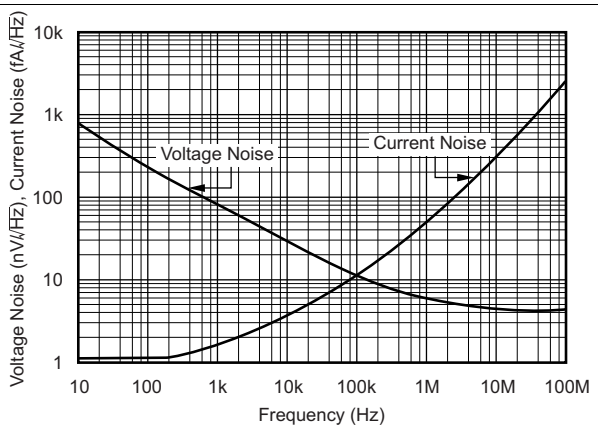


图 12. Input Voltage and Current Noise Spectral Density vs Frequency

版权 © 2013–2018, Texas Instruments Incorporated


Typical Characteristics (接下页)

T_A = 25°C, V_S = 5 V, G = 2, R_F = 604 Ω, and R_L = 150 Ω connected to V_S / 2, (unless otherwise noted)

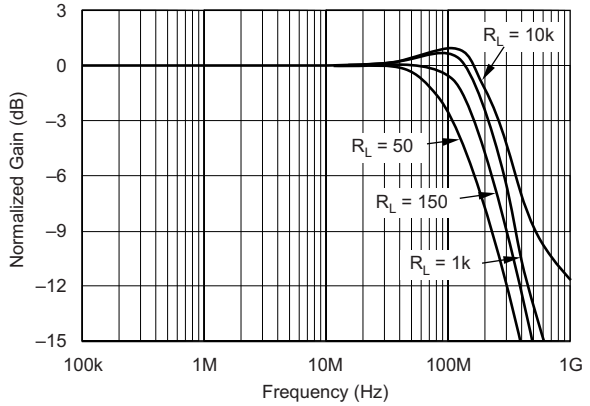

C_L = 0 pF V_O = 0.1 V_{P-P}

图 13. Frequency Response for Various R_L Values

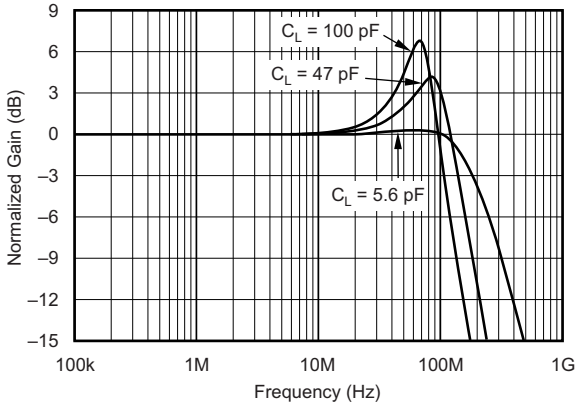

R_S = 0 V_O = 0.1 V_{P-P}

图 14. Frequency Response for Various C_L Values?

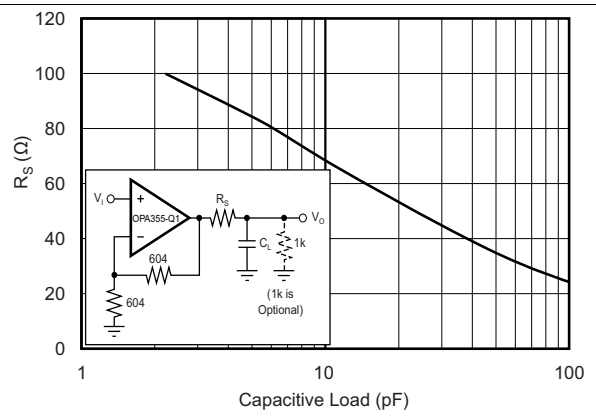


图 15. Recommended R_S Values vs Capacitive Load

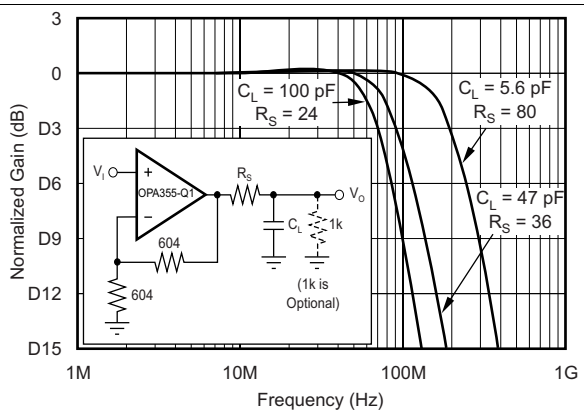


图 16. Frequency Response vs Capacitive Load

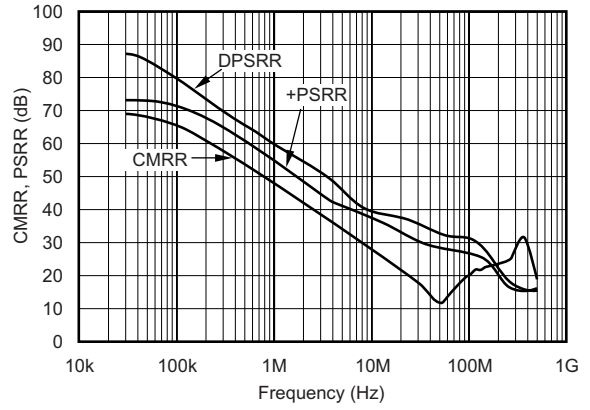


图 17. Common-Mode Rejection Ratio and Power-Supply Rejection Ratio vs Frequency

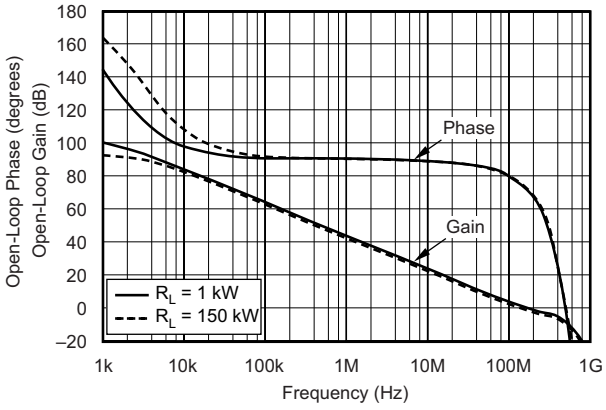


图 18. Open-Loop Gain and Phase

Typical Characteristics (接下页)

T_A = 25°C, V_S = 5 V, G = 2, R_F = 604 Ω, and R_L = 150 Ω connected to V_S / 2, (unless otherwise noted)

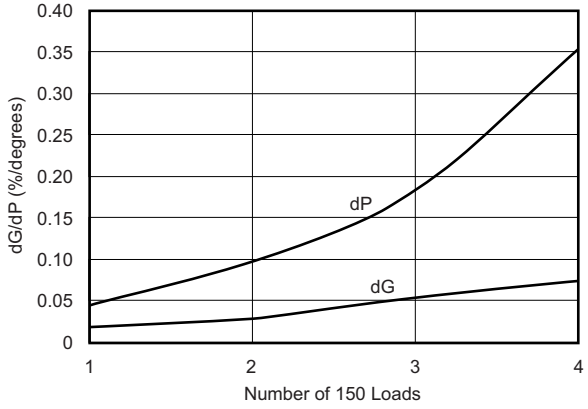


图 19. Composite Video Differential Gain and Phase


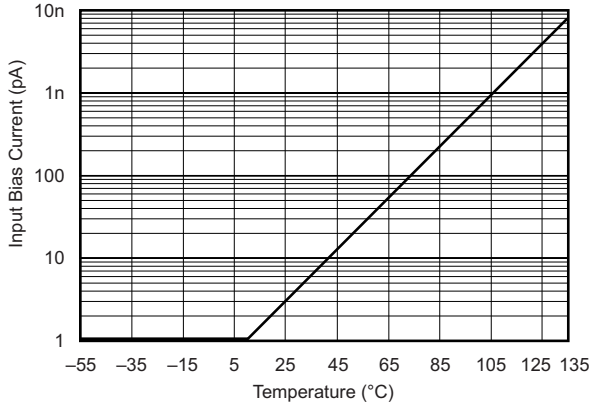


图 20. Input Bias Current vs Temperature

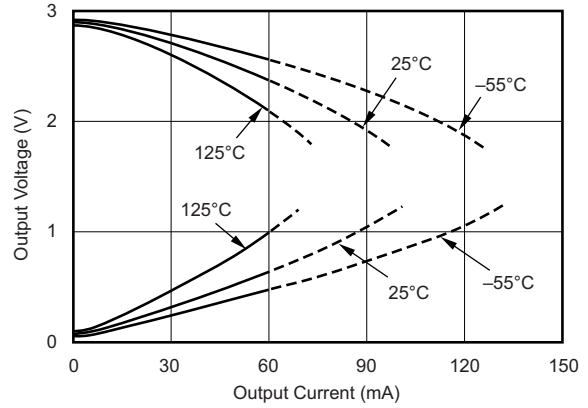

Continuous currents above 60 mA are not recommended

V_S = 3 V

图 21. Output Voltage Swing vs Output Current


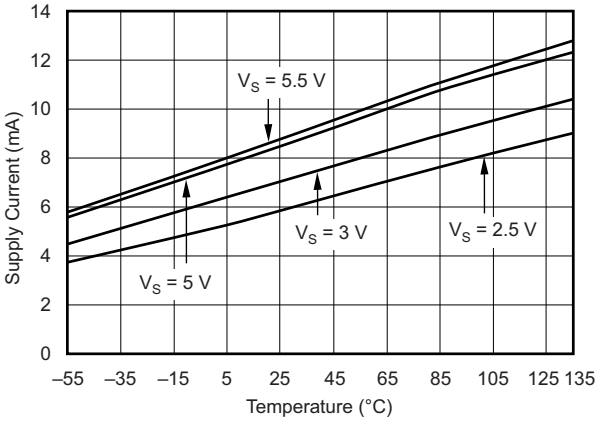


图 22. Supply Current vs Temperature

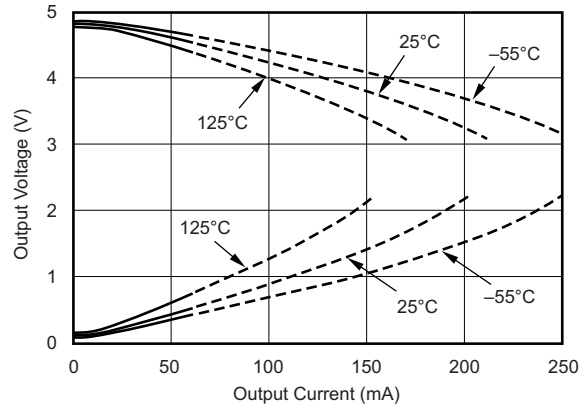

Continuous currents above 60 mA are not recommended

V_S = 5 V

图 23. Output Voltage Swing vs Output Current

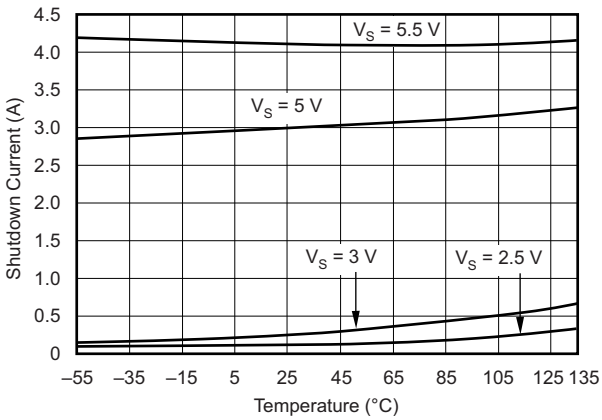


图 24. Shutdown Current vs Temperature

版权 © 2013–2018, Texas Instruments Incorporated

Typical Characteristics (接下页)

T_A = 25°C, V_S = 5 V, G = 2, R_F = 604 Ω, and R_L = 150 Ω connected to V_S / 2, (unless otherwise noted)



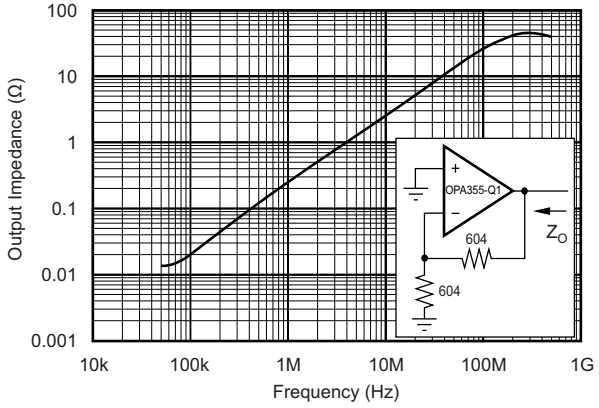


图 25. Closed-Loop Output Impedance vs Frequency

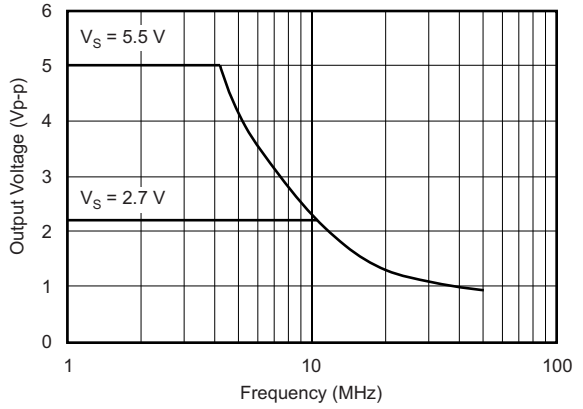

Maximum output voltage without slew-rate induced distortion

图 26. Maximum Output Voltage vs Frequency

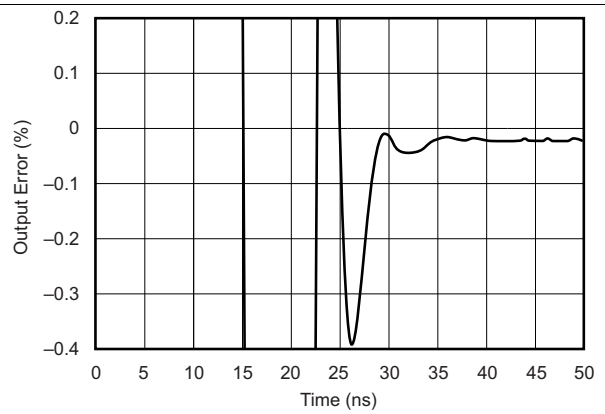

V_O = 2 V_{P-P}

图 27. Output Settling Time to 0.1%

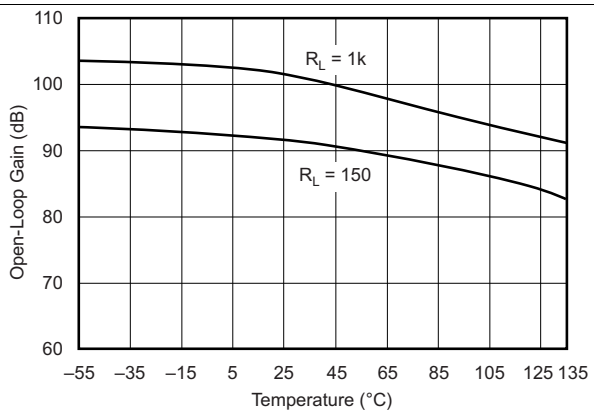


图 28. Open-Loop Gain vs Temperature

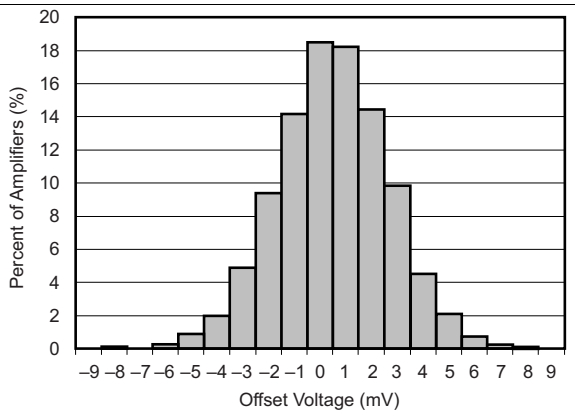


图 29. Offset Voltage Production Distribution

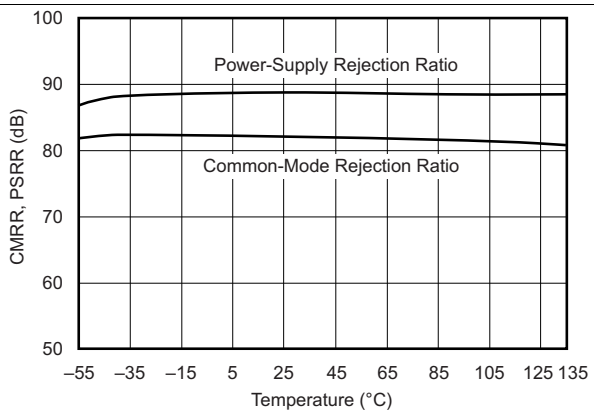



图 30. Common-Mode Rejection Ratio and Power-Supply Rejection Ratio vs Temperature

8 Detailed Description

8.1 Overview

The OPA355-Q1 operational amplifier is a high-speed, 300-V/μs, amplifier, making the device a great option for transimpedance applications. The device is unity-gain stable and can operate on a single-supply voltage (2.7 V to 5.5 V), or a split-supply voltage (±1.35 V to ±2.75 V), making the device highly versatile and simple to use. The OPA355-Q1 amplifier is specified from 2.7 V to 5.5 V and over the automotive temperature range of –40°C to +125°C.

8.2 Functional Block Diagram

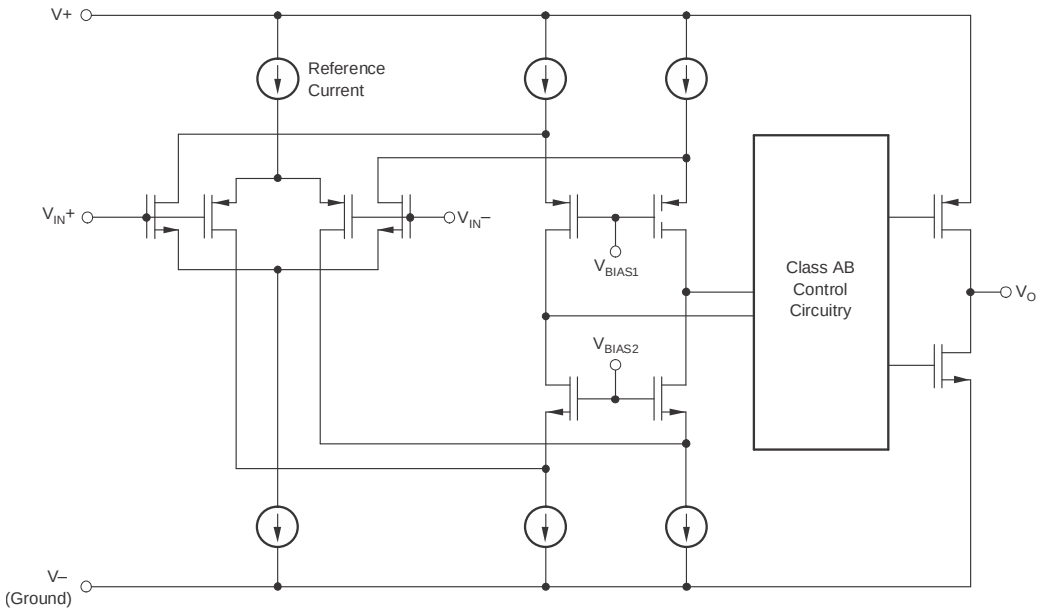

8.3 Feature Description

8.3.1 Operating Voltage

The OPA355-Q1 device is specified over a power-supply range of 2.7 V to 5.5 V (±1.35 to ±2.75 V). However, the supply voltage ranges from 2.5 to 5.5 V (±1.25 to ±2.75 V). Supply voltages higher than 7.5 V (absolute maximum) can permanently damage the amplifier.

Parameters that vary significantly over supply voltage or temperature are shown in the Typical Characteristics section of this data sheet.

8.3.2 Enable Function

The OPA355-Q1 device is enabled by applying a TTL high-voltage level to the enable pin. Conversely, a TTL low -voltage level disables the amplifier, which reduces the supply current from 8.3 mA to 3.4 μA per amplifier. This pin voltage is referenced to a single-supply ground. When using a split-supply, such as ±2.5 V, the enable and disable voltage levels are referenced to V–. For portable battery-operated applications, this feature is used to greatly reduce the average current and as a result, extend battery life.

The enable input is modeled as a CMOS input gate with a 100-kΩ pullup resistor to V+. The enable pin assumes a logic high and the amplifier turns on if the enable pin is left open.

The enable time is 100 ns and the disable time is 30 ns, which allows the OPA355-Q1 device to operate as a *gated* amplifier, or to have the output multiplexed onto a common output bus. When disabled, the output assumes a high-impedance state.

版权 © 2013–2018, Texas Instruments Incorporated

Feature Description (接下页)

8.3.3 Output Drive

The output stage supplies a high short-circuit current (typically over 200 mA). Therefore, an on-chip thermal shutdown circuit is provided to protect the OPA355-Q1 device from dangerously-high junction temperatures. At 160°C, the protection circuit shuts down the amplifier. Normal operation resumes when the junction temperature cools to below 140°C.

注

Running a continuous DC current in excess of ±60 mA is not recommended. See the *Output Voltage Swing vs Output Current* graphs (图 21 and 图 22) in the Typical Characteristics section.

8.4 Device Functional Modes

The OPA355-Q1 device is powered on when the supply is connected. The device can operate as a single supply operational amplifier or dual supply amplifier depending on the application. The device can also be used with asymmetrical supplies as long as the differential voltage (V– to V+) is at least 1.8 V and no greater than 5.5 V (example: V– set to –3.5 V and V+ set to 1.5 V).

版权 © 2013–2018, Texas Instruments Incorporated

9 Application and Implementation

9.1 Application Information

The OPA355-Q1 device is a CMOS, high-speed, voltage-feedback, operational amplifier (op-amp) designed for general-purpose applications.

The amplifier features a 200-MHz gain bandwidth and 300-V/μs slew rate, but the device is unity-gain stable and operates as a 1-V/V voltage follower.


The input common-mode voltage range of the device includes ground, which allows the OPA355-Q1 to be used in virtually any single-supply application up to a supply voltage of 5.5 V.

9.2 Typical Applications

9.2.1 Transimpedance Amplifier

Wide gain bandwidth, low input bias current, low input voltage, and current noise make the OPA355-Q1 device a preferred wideband photodiode transimpedance amplifier. Low-voltage noise is important because photodiode capacitance causes the effective noise gain of the circuit to increase at high frequency.

The key elements to a transimpedance design, as shown in 图 31, are the expected diode capacitance ($C_{(D)}$), which must include the parasitic input common-mode and differential-mode input capacitance (4 pF + 5 pF), the desired transimpedance gain ($R_{(FB)}$), and the gain-bandwidth (GBW) for the OPA355-Q1 device (20 MHz). With these three variables set, the feedback capacitor value ($C_{(FB)}$) is set to control the frequency response. $C_{(FB)}$ includes the stray capacitance of $R_{(FB)}$, which is 0.2 pF for a typical surface-mount resistor.

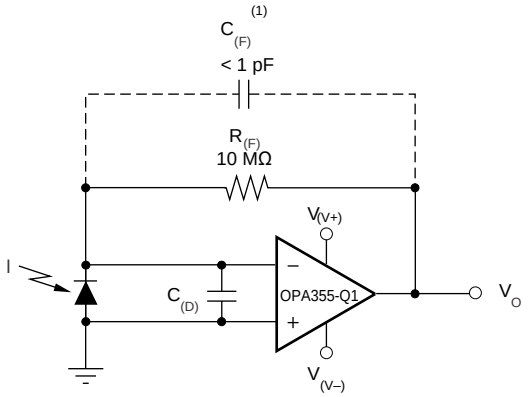

(1) $C_{(FB)}$ is optional to prevent gain peaking. $C_{(FB)}$ includes the stray capacitance of $R_{(FB)}$.

图 31. Dual-Supply Transimpedance Amplifier

9.2.1.1 Design Requirements

PARAMETER	VALUE
Supply voltage $V_{(V+)}$	2.5 V
Supply voltage $V_{(V–)}$	–2.5 V

9.2.1.2 Detailed Design Procedure

To achieve a maximally-flat, second-order Butterworth frequency response, the feedback pole must be set to:

$$\frac{1}{2 \times \pi \times R_{(FB)} \times C_{(FB)}} = \sqrt{\frac{GBW}{4 \times \pi \times R_{(FB)} \times C_{(D)}}} \quad (1)$$

Use 公式 2 to calculate the bandwidth.

$$f_{(-3\ dB)} = \sqrt{\frac{GBW}{2 \times \pi \times R_{(FB)} \times C_{(D)}}} \quad (2)$$

版权 © 2013–2018, Texas Instruments Incorporated

For other transimpedance bandwidths, consider the high-speed CMOS OPA380 (90-MHz GBW), OPA354 (100-MHz GBW), OPA300 (180-MHz GBW), OPA355 (200-MHz GBW), or OPA656 and OPA657 (400-MHz GBW).

For single-supply applications, the +INx input can be biased with a positive DC voltage to allow the output to reach true zero when the photodiode is not exposed to any light, and respond without the added delay that results from coming out of the negative rail; this configuration is shown in 图 32. This bias voltage appears across the photodiode, providing a reverse bias for faster operation.

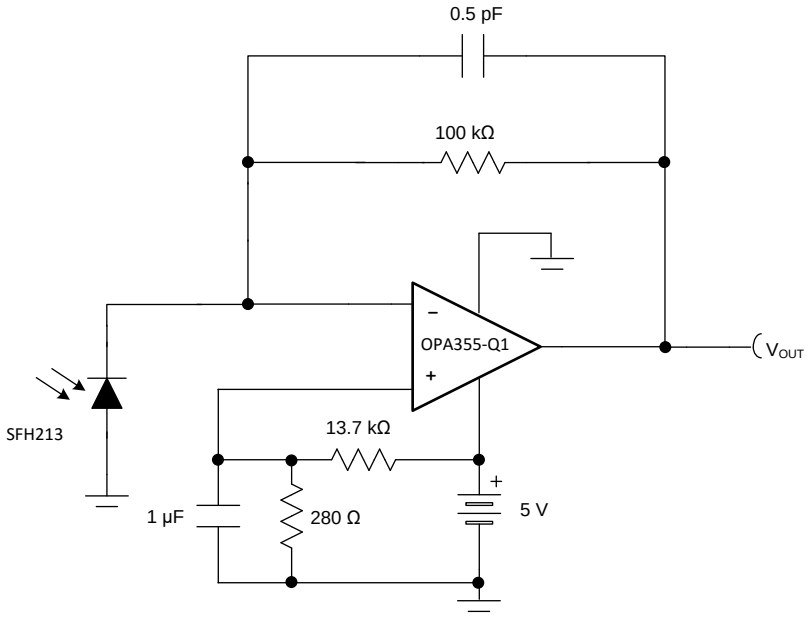


图 32. Single-Supply Transimpedance Amplifier

For additional information, see the *Compensate Transimpedance Amplifiers Intuitively* application bulletin.


9.2.1.2.1 Optimizing The Transimpedance Circuit

To achieve the best performance, select components according to the following guidelines:

1. For lowest noise, select $R_{(FB)}$ to create the total required gain. Using a lower value for $R_{(FB)}$ and adding gain after the transimpedance amplifier generally produces poorer noise performance. The noise produced by $R_{(FB)}$ increases with the square-root of $R_{(FB)}$, whereas the signal increases linearly. Therefore, signal-to-noise ratio improves when all the required gain is placed in the transimpedance stage.
2. Minimize photodiode capacitance and stray capacitance at the summing junction (inverting input). This capacitance causes the voltage noise of the op amp to amplify (increasing amplification at high frequency). Using a low-noise voltage source to reverse-bias a photodiode can significantly reduce the capacitance. Smaller photodiodes have lower capacitance. Use optics to concentrate light on a small photodiode.
3. Noise increases with increased bandwidth. Limit the circuit bandwidth to only that required. Use a capacitor across the $R_{(FB)}$ to limit bandwidth, even if not required for stability.
4. Circuit board leakage can degrade the performance of an otherwise well-designed amplifier. Clean the circuit board carefully. A circuit board guard trace that encircles the summing junction and is driven at the same voltage can help control leakage.

For additional information, see the *Noise Analysis of FET Transimpedance Amplifiers* and *Noise Analysis for High-Speed Op Amps* application bulletins).

9.2.1.3 Application Curve

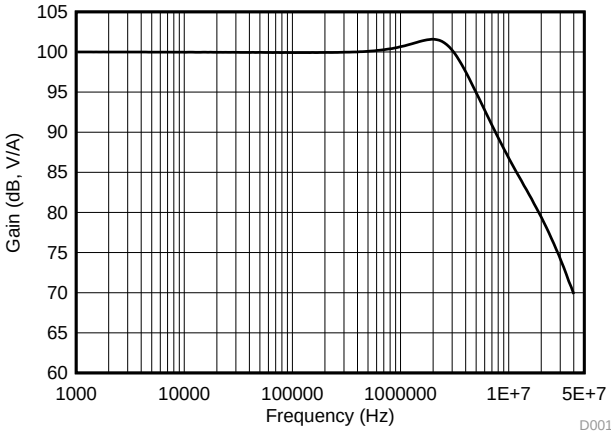

–3 dB bandwidth is 4.56 MHz

图 33. AC Transfer Function

9.2.2 High-Impedance Sensor Interface

Many sensors have high source impedances that may range up to 10 MΩ, or even higher. The output signal of sensors often must be amplified or otherwise conditioned by means of an amplifier. The input bias current of this amplifier can load the sensor output and cause a voltage drop across the source resistance, as shown in 图 34, where ($V_{(+INx)} = V_S - I_{(BIAS)} \times R_{(S)}$). The last term, $I_{(BIAS)} \times R_{(S)}$, shows the voltage drop across $R_{(S)}$. To prevent errors introduced to the system as a result of this voltage, an op amp with very low input bias current must be used with high impedance sensors. This low current keeps the error contribution by $I_{(BIAS)} \times R_{(S)}$ less than the input voltage noise of the amplifier, so that it does not become the dominant noise factor. The OPA355-Q1 op amp features very low input bias current (typically 200 fA), and is therefore a preferred choice for such applications.

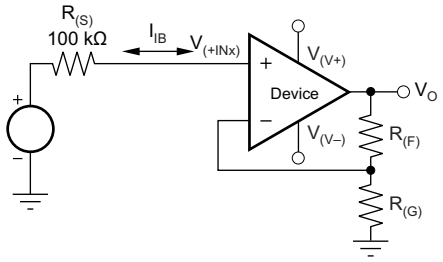



图 34. Noise as a Result of $I_{(BIAS)}$

版权 © 2013–2018, Texas Instruments Incorporated

9.2.3 Driving ADCs

The OPA355-Q1 op amps are designed for driving sampling analog-to-digital converters (ADCs) with sampling speeds up to 1 MSPS. The zero-crossover distortion input stage topology allows the OPA355-Q1 device to drive ADCs without degradation of differential linearity and THD.

The OPA355-Q1 device can be used to buffer the ADC switched input capacitance and resulting charge injection while providing signal gain. 图 35 shows the OPA355-Q1 device configured to drive the ADS8326.

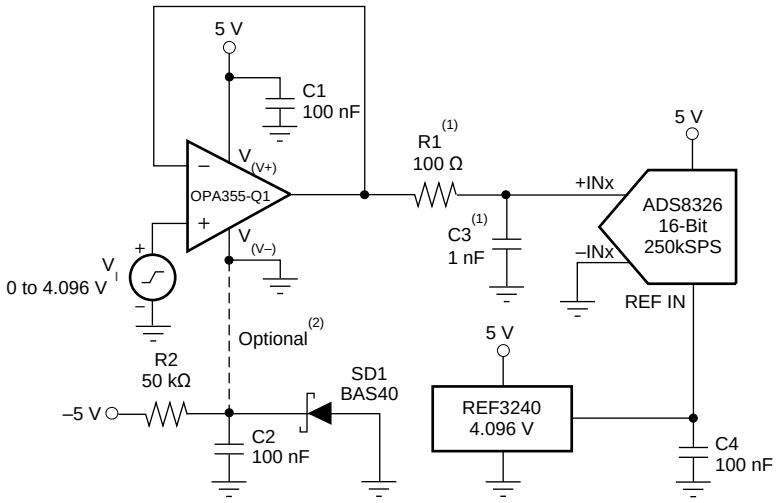

(1) Suggested value; may require adjustment based on specific application.

(2) Single-supply applications lose a small number of ADC codes near ground as a result of op amp output swing limitation. If a negative power supply is available, this simple circuit creates a –0.3-V supply to allow output swing to true ground potential.

图 35. Driving the ADS8326

9.2.4 Active Filter

The OPA355-Q1 device is designed for active filter applications that require a wide bandwidth, fast slew rate, low-noise, single-supply operational amplifier. 图 36 shows a 500 kHz, second-order, low-pass filter using the multiple-feedback (MFB) topology. The components are selected to provide a maximally-flat Butterworth response. Beyond the cutoff frequency, roll-off is –40 dB/dec. The Butterworth response is preferred for applications requiring predictable gain characteristics, such as the anti-aliasing filter used in front of an ADC.

One point to observe when considering the MFB filter is that the output is inverted, relative to the input. If this inversion is not required, or not desired, a noninverting output can be achieved through one of the following options:

1. Adding an inverting amplifier
2. Adding an additional second-order MFB stage
3. Using a noninverting filter topology, such as the Sallen-Key (see 图 37).

MFB and Sallen-Key, low-pass and high-pass filter synthesis is quickly accomplished using TI's FilterPro™ program. This software is available as a free download at www.ti.com.

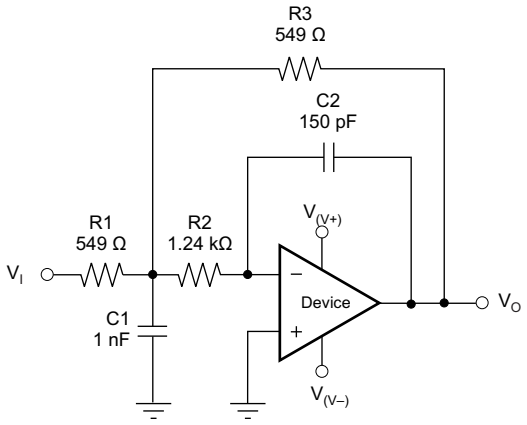


图 36. Second-Order Butterworth 500-kHz Low-Pass Filter

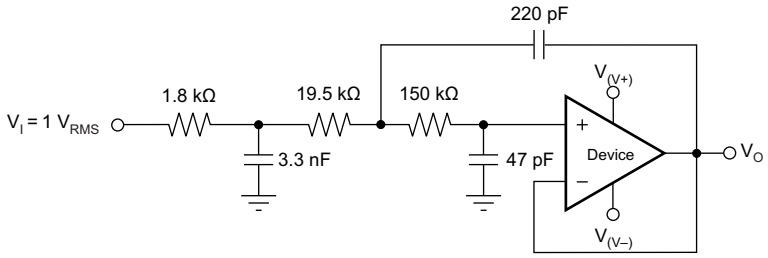


图 37. OPA355-Q1 Configured as a Three-Pole, 20-kHz, Sallen-Key Filter

版权 © 2013–2018, Texas Instruments Incorporated

10 Power Supply Recommendations

The OPA355-Q1 device is specified for operation from 2.7 to 5.5 V (±1.35 to ±2.75 V); many specifications apply from –40°C to +125°C. Parameters that can exhibit significant variance with regard to operating voltage or temperature are shown in the *Typical Characteristics* section.

Place 0.1-μF bypass capacitors close to the power-supply pins to reduce errors coupling in from noisy or high-impedance power supplies. For more detailed information on bypass capacitor placement, see the *Layout Guidelines* section.

Power dissipation depends on power-supply voltage, signal and load conditions. With DC signals, power dissipation is equal to the product of output current times the voltage across the conducting output transistor, VS – VO. Minimize power dissipation by using the lowest possible power-supply voltage required to ensure the required output voltage swing.

For resistive loads, the maximum power dissipation occurs at a DC output voltage of one-half the power-supply voltage. Dissipation with AC signals is lower. Application bulletin AB-039, *Power Amplifier Stress and Power Handling Limitations* explains how to calculate or measure power dissipation with unusual signals and loads, and is available on www.ti.com.

Any tendency to activate the thermal protection circuit indicates excessive power dissipation or an inadequate heat sink. For reliable operation, limit junction temperature to 150°C maximum. To estimate the margin of safety in a complete design, increase the ambient temperature to trigger the thermal protection at 160°C. The thermal protection must trigger more than 35°C above the maximum expected ambient condition of the application.

11 Layout

11.1 Layout Guidelines

Good high-frequency printed-circuit board (PCB) layout techniques must be used for the OPA355-Q1. Generous use of ground planes, short direct-signal traces, and a preferred bypass capacitor located at the V+ pin ensures clean and stable operation. Large areas of copper help dissipate heat generated within the amplifier in normal operation.

Sockets are not recommended for use with any high-speed amplifier.

A 10-nF ceramic bypass capacitor is the minimum recommended value; adding a 1-μF or larger tantalum capacitor in parallel is beneficial when driving a low-resistance load. Providing adequate bypass capacitance is essential to achieving very low harmonic and intermodulation distortion.

11.2 Layout Example

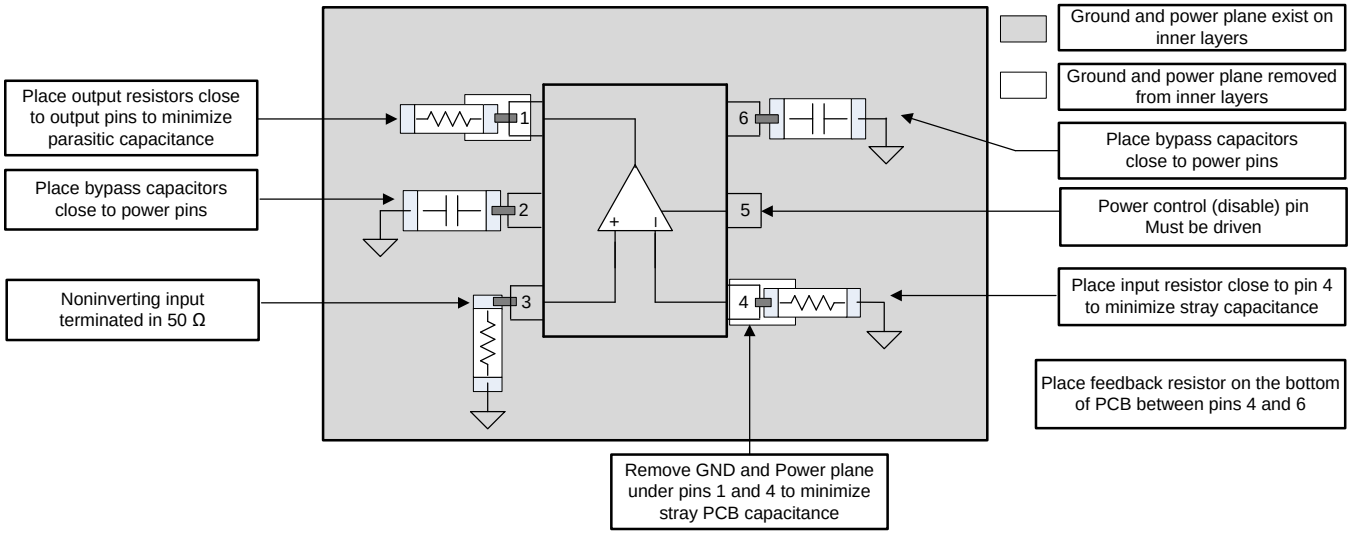


图 38. Layout Example

12 器件和文档支持

12.1 商标

FilterPro is a trademark of Texas Instruments Incorporated.
All other trademarks are the property of their respective owners.

12.2 静电放电警告



这些装置包含有限的内置 ESD 保护。 存储或装卸时，应将导线一起截短或将装置放置于导电泡棉中，以防止 MOS 门极遭受静电损伤。

12.3 术语表

SLYZ022 — *TI 术语表*。

这份术语表列出并解释术语、缩写和定义。

13 机械、封装和可订购信息

以下页面包含机械、封装和可订购信息。这些信息是指定器件的最新可用数据。数据如有变更，恕不另行通知，且不会对此文档进行修订。如需获取此数据表的浏览器版本，请查阅左侧的导航栏。

版权 © 2013–2018, Texas Instruments Incorporated

重要声明和免责声明

TI 均以“原样”提供技术性及可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证其中不含任何瑕疵，且不做任何明示或暗示的担保，包括但不限于对适销性、适合某特定用途或不侵犯任何第三方知识产权的暗示担保。

所述资源可供专业开发人员应用TI 产品进行设计使用。您将对以下行为独自承担全部责任：(1) 针对您的应用选择合适的TI 产品；(2) 设计、验证并测试您的应用；(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。所述资源如有变更，恕不另行通知。TI 对您使用所述资源的授权仅限于开发资源所涉及TI 产品的相关应用。除此之外不得复制或展示所述资源，也不提供其它TI或任何第三方的知识产权授权许可。如因使用所述资源而产生任何索赔、赔偿、成本、损失及债务等，TI对此概不负责，并且您须赔偿由此对TI 及其代表造成的损害。

TI 所提供产品均受TI 的销售条款 (http://www.ti.com.cn/zh-cn/legal/termsofsale.html) 以及ti.com.cn上或随附TI产品提供的其他可适用条款的约束。TI提供所述资源并不扩展或以其他方式更改TI 针对TI 产品所发布的可适用的担保范围或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122
Copyright © 2018 德州仪器半导体技术（上海）有限公司

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
OPA355QDBVRQ1	ACTIVE	SOT-23	DBV	6	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR	-40 to 125	SLN	Samples

(1) The marketing status values are defined as follows:
ACTIVE: Product device recommended for new designs.
LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.
NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.
PREVIEW: Device has been announced but is not in production. Samples may or may not be available.
OBSOLETE: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".
RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.
Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.


(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

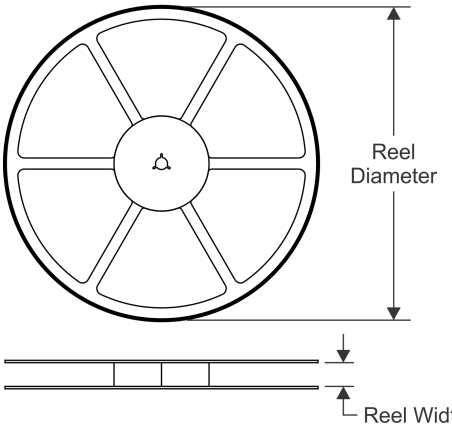


TAPE DIMENSIONS

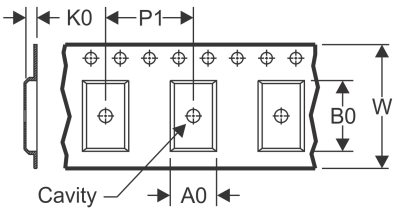

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

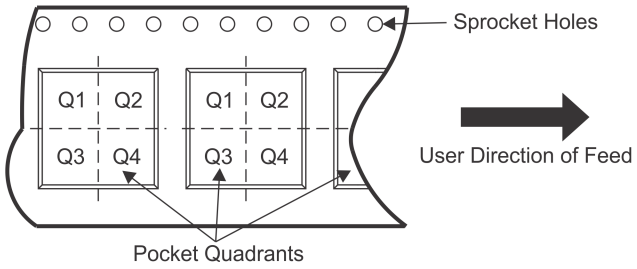

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
OPA355QDBVRQ1	SOT-23	DBV	6	3000	178.0	9.0	3.23	3.17	1.37	4.0	8.0	Q3

TAPE AND REEL BOX DIMENSIONS

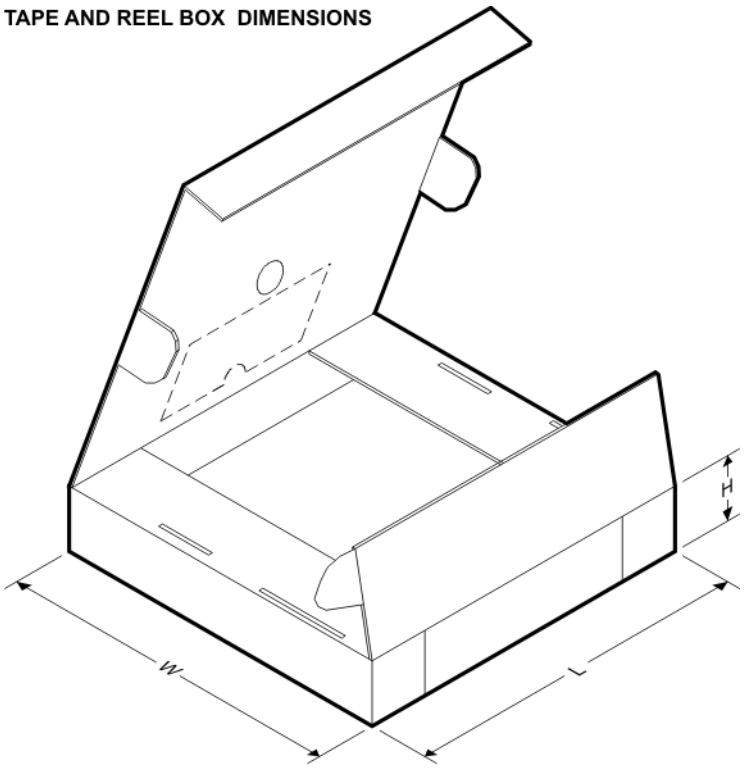

*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
OPA355QDBVRQ1	SOT-23	DBV	6	3000	445.0	220.0	345.0

PACKAGE OUTLINE

DBV0006A

SOT-23 - 1.45 mm max height


SMALL OUTLINE TRANSISTOR

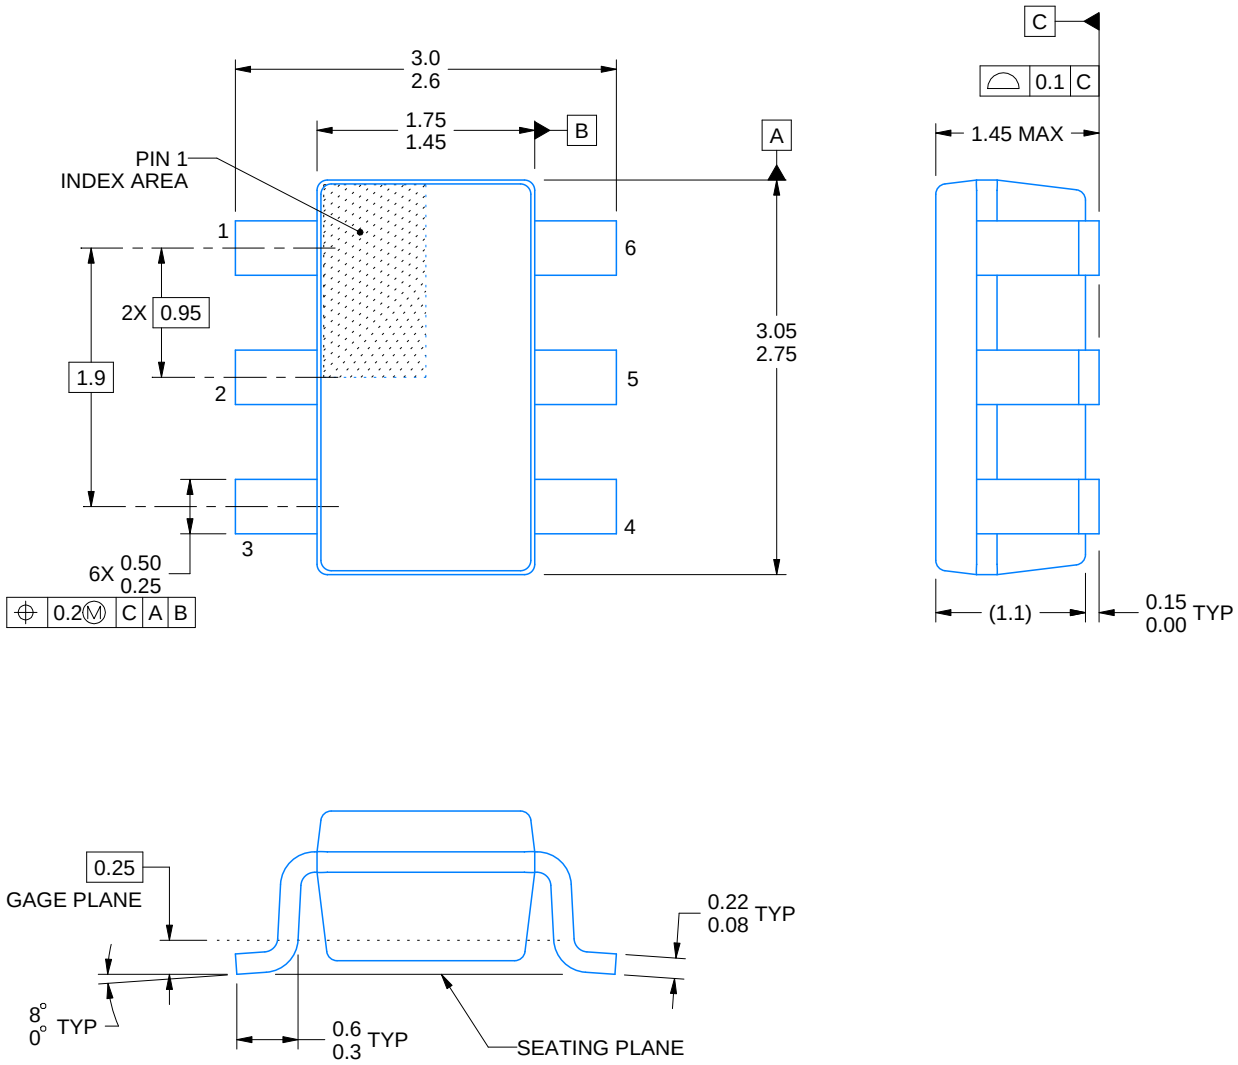


4214840/B 03/2018

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.15 per side.
4. Leads 1,2,3 may be wider than leads 4,5,6 for package orientation.
5. Refernce JEDEC MO-178.

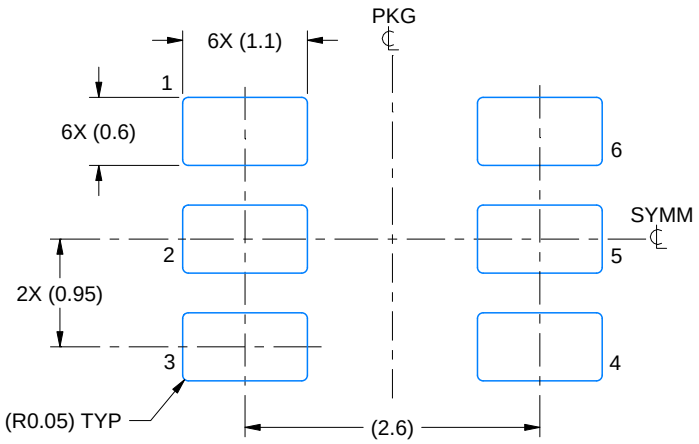

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:15X

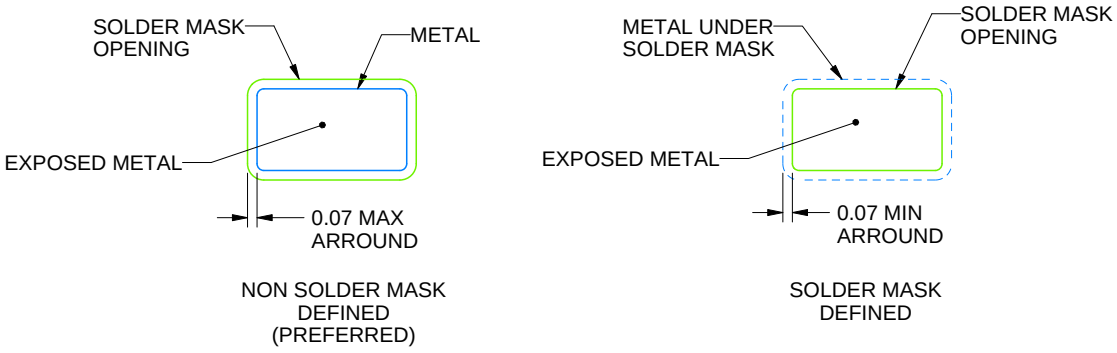


SOLDER MASK DETAILS

4214840/B 03/2018

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

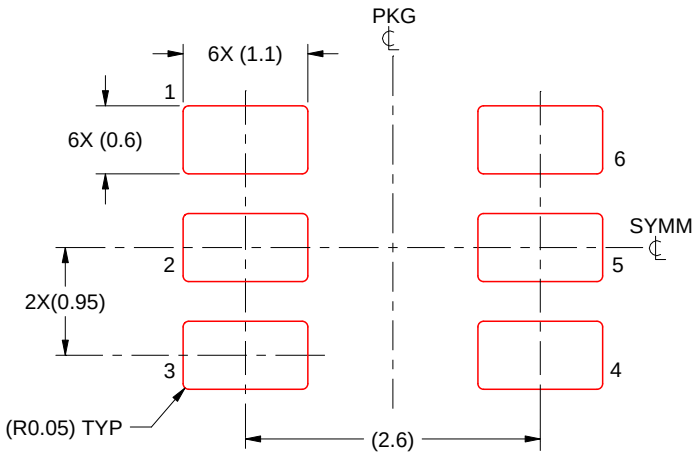

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:15X

4214840/B 03/2018

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

重要声明和免责声明

TI 均以“原样”提供技术性及可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证其中不含任何瑕疵，且不做任何明示或暗示的担保，包括但不限于对适销性、适合某特定用途或不侵犯任何第三方知识产权的暗示担保。

所述资源可供专业开发人员应用TI 产品进行设计使用。您将对以下行为独自承担全部责任：(1) 针对您的应用选择合适的TI 产品；(2) 设计、验证并测试您的应用；(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。所述资源如有变更，恕不另行通知。TI 对您使用所述资源的授权仅限于开发资源所涉及TI 产品的相关应用。除此之外不得复制或展示所述资源，也不提供其它TI或任何第三方的知识产权授权许可。如因使用所述资源而产生任何索赔、赔偿、成本、损失及债务等，TI对此概不负责，并且您须赔偿由此对TI 及其代表造成的损害。

TI 所提供产品均受TI 的销售条款 (http://www.ti.com.cn/zh-cn/legal/termsofsale.html) 以及ti.com.cn上或随附TI产品提供的其他可适用条款的约束。TI提供所述资源并不扩展或以其他方式更改TI 针对TI 产品所发布的可适用的担保范围或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122
Copyright © 2019 德州仪器半导体技术（上海）有限公司