


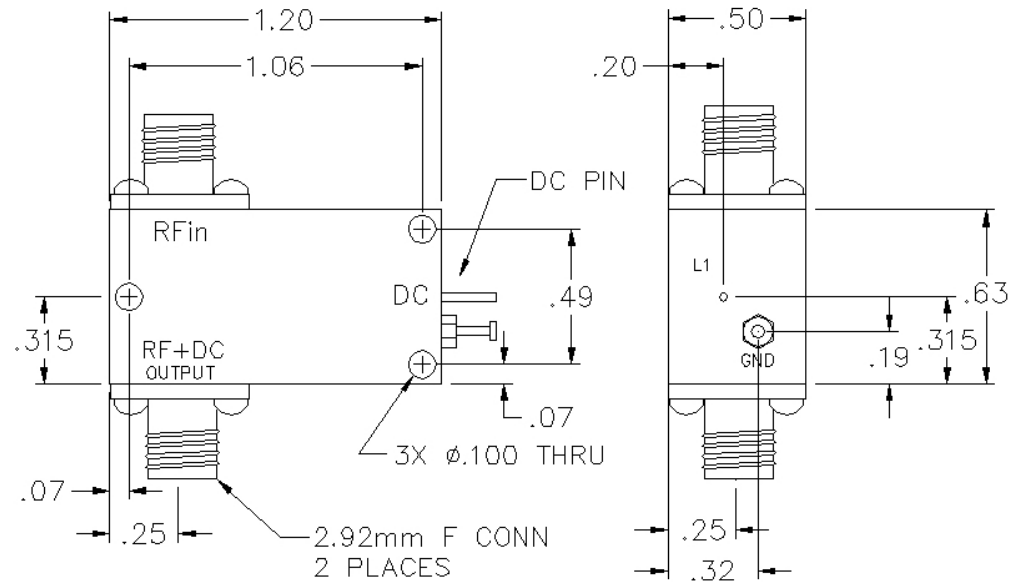

## SPECIFICATIONS

Frequency Range: 30 kHz - 27 GHz  
 Isolation: 40 dB Min  
 Insertion Loss: 2.2 dB Max  
 Current<sup>†</sup>: 500 mA Max  
 Power: 1 Watt Max  
 Voltage: 25 Vdc Max  
 VSWR: 1.80:1 Max

### Notes:

- Higher current and isolation requirements available.

**PULSAR** MICROWAVE CORPORATION

PULSAR MICROWAVE CORPORATION  
 48 INDUSTRIAL WEST, CLIFTON NJ 07012  
 TEL: 973-779-6262 FAX: 973-779-2727  
 WWW.PULSARMICROWAVE.COM

DESCRIPTION :

Bias Tee

MODEL NO. :

BT-51-400D

DIMENSIONS ARE IN INCHES  
 DECIMAL TOLERANCE:  
 2 PLACE ± .02  
 3 PLACE ± .010

SIZE  
A

CAGE CODE :  
0HR85

REV CODE :  
170131

SCALE : N / A

ALL SPECIFICATIONS ARE SUBJECT TO  
CHANGE WITHOUT NOTICE AT ANY TIME

SHEET 1 OF 1