

## OPA2188 0.03 $\mu\text{V}/^{\circ}\text{C}$ 漂移、低噪声、轨到轨输出、36V、零漂移运算放大器

### 1 特性

- 低偏移电压：25 $\mu\text{V}$ （最大）
- 零漂移：0.03 $\mu\text{V}/^{\circ}\text{C}$
- 低噪声：8.8 nV/ $\sqrt{\text{Hz}}$   
0.1Hz 至 10Hz 噪声：0.25 $\mu\text{V}_{\text{PP}}$
- 出色的直流精度：  
电源抑制比 (PSRR)：142dB  
共模抑制比 (CMRR)：146dB  
开环路增益：136dB
- 增益带宽：2MHz
- 静态电流：475 $\mu\text{A}$ （最大值）
- 宽电源电压： $\pm 2\text{V}$  至  $\pm 18\text{V}$
- 轨到轨输出：  
输入包括负电源轨
- 已过滤射频干扰 (RFI) 的输入
- 微型尺寸封装

### 2 应用范围

- 桥式放大器
- 应力计
- 测试设备
- 传感器 应用
- 温度测量
- 电子称
- 医疗仪表
- 电阻式温度检测器
- 精密有源滤波器

### 3 说明

OPA2188 运算放大器采用 TI 专有的自动归零技术，可在时间和温度范围内提供低偏移电压（25 $\mu\text{V}$ ，最大值）以及近似为零的漂移。这些微型的、高精度、低静态电流放大器提供高输入阻抗和摆幅为电源轨 15mV 之内的轨到轨输出。输入共模范围包括负电源轨。单电源或双电源可在 4V 至 36V（ $\pm 2\text{V}$  至  $\pm 18\text{V}$ ）范围内使用。


OPA2188 器件采用微型小外形尺寸 (MSOP)-8 和小外形尺寸 (SO)-8 封装。此器件的额定工作温度范围为  $-40^{\circ}\text{C}$  至  $+105^{\circ}\text{C}$ 。

器件信息<sup>(1)</sup>

| 器件型号    | 封装        | 封装尺寸（标称值）       |
|---------|-----------|-----------------|
| OPA2188 | SOIC (8)  | 4.90mm x 3.91mm |
|         | VSSOP (8) | 3.00mm x 3.00mm |

(1) 要了解所有可用封装，请见数据表末尾的可订购产品附录。

偏移电压与温度间的关系

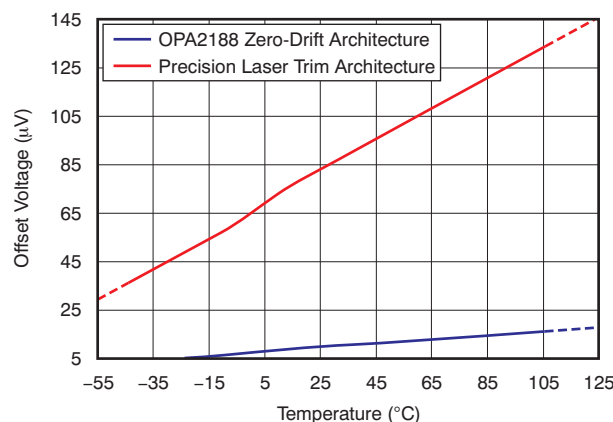

## 目录

|     |                                                                                                                                                |    |      |                                             |    |
|-----|------------------------------------------------------------------------------------------------------------------------------------------------|----|------|---------------------------------------------|----|
| 1   | 特性 .....                                                                                                                                       | 1  | 8.3  | Feature Description .....                   | 18 |
| 2   | 应用范围 .....                                                                                                                                     | 1  | 8.4  | Device Functional Modes .....               | 20 |
| 3   | 说明 .....                                                                                                                                       | 1  | 9    | <b>Application and Implementation</b> ..... | 21 |
| 4   | 修订历史记录 .....                                                                                                                                   | 2  | 9.1  | Application Information .....               | 21 |
| 5   | <b>Zero-Drift Amplifier Portfolio</b> .....                                                                                                    | 3  | 9.2  | Typical Applications .....                  | 21 |
| 6   | <b>Pin Configuration and Functions</b> .....                                                                                                   | 3  | 9.3  | System Examples .....                       | 22 |
| 7   | <b>Specifications</b> .....                                                                                                                    | 4  | 10   | <b>Power Supply Recommendations</b> .....   | 23 |
| 7.1 | Absolute Maximum Ratings .....                                                                                                                 | 4  | 11   | <b>Layout</b> .....                         | 25 |
| 7.2 | ESD Ratings .....                                                                                                                              | 4  | 11.1 | Layout Guidelines .....                     | 25 |
| 7.3 | Recommended Operating Conditions .....                                                                                                         | 4  | 11.2 | Layout Example .....                        | 25 |
| 7.4 | Thermal Information .....                                                                                                                      | 4  | 12   | <b>器件和文档支持</b> .....                        | 26 |
| 7.5 | Electrical Characteristics: High-Voltage Operation, $V_S = \pm 4\text{ V to } \pm 18\text{ V}$ ( $V_S = 8\text{ V to } 36\text{ V}$ ) .....    | 5  | 12.1 | 器件支持 .....                                  | 26 |
| 7.6 | Electrical Characteristics: Low-Voltage Operation, $V_S = \pm 2\text{ V to } < \pm 4\text{ V}$ ( $V_S = +4\text{ V to } < +8\text{ V}$ ) ..... | 7  | 12.2 | 文档支持 .....                                  | 26 |
| 7.7 | Typical Characteristics: Table of Graphs .....                                                                                                 | 9  | 12.3 | 接收文档更新通知 .....                              | 27 |
| 7.8 | Typical Characteristics .....                                                                                                                  | 10 | 12.4 | 社区资源 .....                                  | 27 |
| 8   | <b>Detailed Description</b> .....                                                                                                              | 17 | 12.5 | 商标 .....                                    | 27 |
| 8.1 | Overview .....                                                                                                                                 | 17 | 12.6 | 静电放电警告 .....                                | 27 |
| 8.2 | Functional Block Diagram .....                                                                                                                 | 17 | 12.7 | Glossary .....                              | 27 |
|     |                                                                                                                                                |    | 13   | <b>机械、封装和可订购信息</b> .....                    | 27 |

## 4 修订历史记录

注：之前版本的页码可能与当前版本有所不同。

| Changes from Revision B (September 2012) to Revision C                                                                                                                     | Page |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
| • 已添加 ESD 额定值表，特性 描述 部分，器件功能模式，应用和实施部分，电源相关建议部分，布局部分，器件和文档支持部分以及机械、封装和可订购信息部分 .....                                                                                        | 1    |
| • Changed Input Bias Current, $I_B$ and $I_{OS}$ parameters overtemperature maximum specification in <i>Electrical Characteristics: High-Voltage Operation</i> table ..... | 5    |
| • Changed Noise, <i>Input voltage noise density</i> parameter units in <i>Electrical Characteristics: High-Voltage Operation</i> table ...                                 | 5    |
| • Changed Power Supply, $I_Q$ parameter maximum specifications in <i>Electrical Characteristics: High-Voltage Operation</i> table .....                                    | 6    |
| • Changed Input Bias Current, $I_B$ and $I_{OS}$ parameters overtemperature maximum specification in <i>Electrical Characteristics: Low-Voltage Operation</i> table .....  | 7    |
| • Changed Noise, <i>Input voltage noise density</i> parameter units in <i>Electrical Characteristics: Low-Voltage Operation</i> table .....                                | 7    |
| • Changed Power Supply, $I_Q$ parameter maximum specifications in <i>Electrical Characteristics: Low-Voltage Operation</i> table .....                                     | 8    |

| Changes from Revision A (June 2012) to Revision B | Page |
|---------------------------------------------------|------|
| • 已更改 第二个至最后一个 应用 要点) .....                       | 1    |


| Changes from Original (August 2011) to Revision A | Page |
|---------------------------------------------------|------|
| • 已删除 通篇所有对 OPA188 和 OPA4188 的引用 .....            | 1    |
| • 已按当前标准更改文档 .....                                | 1    |
| • 已更改 文档状态至量产数据 .....                             | 1    |

## 5 Zero-Drift Amplifier Portfolio

| VERSION | PRODUCT               | OFFSET VOLTAGE ( $\mu\text{V}$ ) | OFFSET VOLTAGE DRIFT ( $\mu\text{V}/^\circ\text{C}$ ) | BANDWIDTH (MHz) |
|---------|-----------------------|----------------------------------|-------------------------------------------------------|-----------------|
| Single  | OPA188 (4 V to 36 V)  | 25                               | 0.085                                                 | 2               |
|         | OPA333 (5 V)          | 10                               | 0.05                                                  | 0.35            |
|         | OPA378 (5 V)          | 50                               | 0.25                                                  | 0.9             |
|         | OPA735 (12 V)         | 5                                | 0.05                                                  | 1.6             |
| Dual    | OPA2188 (4 V to 36 V) | 25                               | 0.085                                                 | 2               |
|         | OPA2333 (5 V)         | 10                               | 0.05                                                  | 0.35            |
|         | OPA2378 (5 V)         | 50                               | 0.25                                                  | 0.9             |
|         | OPA2735 (12 V)        | 5                                | 0.05                                                  | 1.6             |
| Quad    | OPA4188 (4 V to 36 V) | 25                               | 0.085                                                 | 2               |
|         | OPA4330 (5 V)         | 50                               | 0.25                                                  | 0.35            |

## 6 Pin Configuration and Functions

**D and DGK Packages  
8-Pin SOIC and MSOP  
Top View**

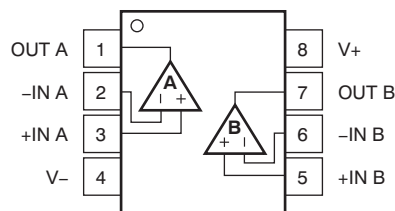

**Pin Functions**

| PIN   |     | I/O | DESCRIPTION                                     |
|-------|-----|-----|-------------------------------------------------|
| NAME  | NO. |     |                                                 |
| -IN A | 2   | I   | Negative (inverting) input signal, channel A    |
| -IN B | 6   | I   | Negative (inverting) input signal, channel B    |
| +IN A | 3   | I   | Positive (noninverting) input signal, channel A |
| +IN B | 5   | I   | Positive (noninverting) input signal, channel B |
| OUT A | 1   | O   | Output, channel A                               |
| OUT B | 7   | O   | Output, channel B                               |
| V-    | 4   | —   | Negative (lowest) power supply                  |
| V+    | 8   | —   | Positive (highest) power supply                 |

## 7 Specifications

### 7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|             |                                                | MIN                     | MAX                        | UNIT |
|-------------|------------------------------------------------|-------------------------|----------------------------|------|
| Voltage     | Supply voltage                                 |                         | ±20, 40<br>(single supply) | V    |
|             | Signal input terminals, voltage <sup>(2)</sup> | (V <sub>-</sub> ) – 0.5 | (V <sub>+</sub> ) + 0.5    | V    |
| Current     | Signal input terminals, current <sup>(2)</sup> | –10                     | 10                         | mA   |
|             | Output short-circuit <sup>(3)</sup>            | Continuous              |                            |      |
| Temperature | Operating, T <sub>A</sub>                      | –55                     | 125                        | °C   |
|             | Junction, T <sub>J</sub>                       |                         | 150                        | °C   |
|             | Storage, T <sub>stg</sub>                      | –65                     | 150                        | °C   |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) Input terminals are diode-clamped to the power-supply rails. Input signals that can swing more than 0.5 V beyond the supply rails should be current-limited to 10 mA or less.
- (3) Short-circuit to ground, one amplifier per package.

### 7.2 ESD Ratings

|                    |                         |                                                                                | VALUE | UNIT |
|--------------------|-------------------------|--------------------------------------------------------------------------------|-------|------|
| V <sub>(ESD)</sub> | Electrostatic discharge | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>              | ±1500 | V    |
|                    |                         | Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup> | ±1000 |      |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

|                |                             | MIN    | NOM | MAX      | UNIT |
|----------------|-----------------------------|--------|-----|----------|------|
| V <sub>S</sub> | Supply voltage              | 4 (±2) |     | 36 (±18) | V    |
| T <sub>A</sub> | Specified temperature range | –40    |     | +105     | °C   |

### 7.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | OPA2188ID | OPA2188IDGK | UNIT |
|-------------------------------|----------------------------------------------|-----------|-------------|------|
|                               |                                              | D (SOIC)  | DGK (VSSOP) |      |
|                               |                                              | 8 PINS    | 8 PINS      |      |
| R <sub>θJA</sub>              | Junction-to-ambient thermal resistance       | 111       | 159.3       | °C/W |
| R <sub>θJC(top)</sub>         | Junction-to-case (top) thermal resistance    | 54.9      | 37.4        | °C/W |
| R <sub>θJB</sub>              | Junction-to-board thermal resistance         | 51.7      | 48.5        | °C/W |
| ψ <sub>JT</sub>               | Junction-to-top characterization parameter   | 9.3       | 1.2         | °C/W |
| ψ <sub>JB</sub>               | Junction-to-board characterization parameter | 51.1      | 77.1        | °C/W |
| R <sub>θJC(bot)</sub>         | Junction-to-case (bottom) thermal resistance | n/a       | n/a         | °C/W |

- (1) For more information about traditional and new thermal metrics, see [Semiconductor and IC Package Thermal Metrics](#).

## 7.5 Electrical Characteristics: High-Voltage Operation, $V_S = \pm 4\text{ V}$ to $\pm 18\text{ V}$ ( $V_S = 8\text{ V}$ to $36\text{ V}$ )

at  $T_A = 25^\circ\text{C}$ ,  $R_L = 10\text{ k}\Omega$  connected to  $V_S/2$ , and  $V_{\text{COM}} = V_{\text{OUT}} = V_S/2$ , unless otherwise noted.

| PARAMETER           |                                   | TEST CONDITIONS                                                                                          | MIN | TYP              | MAX   | UNIT                     |
|---------------------|-----------------------------------|----------------------------------------------------------------------------------------------------------|-----|------------------|-------|--------------------------|
| OFFSET VOLTAGE      |                                   |                                                                                                          |     |                  |       |                          |
| V <sub>OS</sub>     | Input offset voltage              |                                                                                                          |     | 6                | 25    | μV                       |
|                     |                                   | T <sub>A</sub> = −40°C to +105°C                                                                         |     | 0.03             | 0.085 | μV/°C                    |
| PSRR                | Power-supply rejection ratio      | V <sub>S</sub> = 4 V to 36 V, V <sub>CM</sub> = V <sub>S</sub> / 2                                       |     | 0.075            | 0.3   | μV/V                     |
|                     |                                   | V <sub>S</sub> = 4 V to 36 V, V <sub>CM</sub> = V <sub>S</sub> / 2, T <sub>A</sub> = −40°C to +105°C     |     |                  | 0.3   | μV/V                     |
|                     | Long-term stability               |                                                                                                          |     | 4 <sup>(1)</sup> |       | μV                       |
|                     | Channel separation, DC            |                                                                                                          |     | 1                |       | μV/V                     |
| INPUT BIAS CURRENT  |                                   |                                                                                                          |     |                  |       |                          |
| I <sub>B</sub>      | Input bias current                | V <sub>CM</sub> = V <sub>S</sub> / 2                                                                     |     | ±160             | ±850  | pA                       |
|                     |                                   | T <sub>A</sub> = −40°C to +105°C                                                                         |     |                  | ±18   | nA                       |
| I <sub>OS</sub>     | Input offset current              |                                                                                                          |     | ±320             | ±1700 | pA                       |
|                     |                                   | T <sub>A</sub> = −40°C to +105°C                                                                         |     |                  | ±6    | nA                       |
| NOISE               |                                   |                                                                                                          |     |                  |       |                          |
| e <sub>n</sub>      | Input voltage noise               | f = 0.1 Hz to 10 Hz                                                                                      |     | 0.25             |       | μV <sub>PP</sub>         |
| e <sub>n</sub>      | Input voltage noise density       | f = 1 kHz                                                                                                |     | 8.8              |       | nV/√Hz                   |
| i <sub>n</sub>      | Input current noise density       | f = 1 kHz                                                                                                |     | 7                |       | fA/√Hz                   |
| INPUT VOLTAGE RANGE |                                   |                                                                                                          |     |                  |       |                          |
| V <sub>CM</sub>     | Common-mode voltage               |                                                                                                          | V−  | (V+) − 1.5       |       | V                        |
| CMRR                | Common-mode rejection ratio       | (V−) < V <sub>CM</sub> < (V+) − 1.5 V                                                                    | 120 | 134              |       | dB                       |
|                     |                                   | (V−) + 0.5 V < V <sub>CM</sub> < (V+) − 1.5 V, V <sub>S</sub> = ±18 V                                    | 130 | 146              |       | dB                       |
|                     |                                   | (V−) + 0.5 V < V <sub>CM</sub> < (V+) − 1.5 V, V <sub>S</sub> = ±18 V, T <sub>A</sub> = −40°C to +105°C  | 120 | 126              |       | dB                       |
| INPUT IMPEDANCE     |                                   |                                                                                                          |     |                  |       |                          |
|                     | Differential                      |                                                                                                          |     | 100    6         |       | MΩ    pF                 |
|                     | Common-mode                       |                                                                                                          |     | 6    9.5         |       | 10 <sup>12</sup> Ω    pF |
| OPEN-LOOP GAIN      |                                   |                                                                                                          |     |                  |       |                          |
| A <sub>OL</sub>     | Open-loop voltage gain            | (V−) + 500 mV < V <sub>O</sub> < (V+) − 500 mV, R <sub>L</sub> = 10 kΩ                                   | 130 | 136              |       | dB                       |
|                     |                                   | (V−) + 500 mV < V <sub>O</sub> < (V+) − 500 mV, R <sub>L</sub> = 10 kΩ, T <sub>A</sub> = −40°C to +105°C | 120 | 126              |       | dB                       |
| FREQUENCY RESPONSE  |                                   |                                                                                                          |     |                  |       |                          |
| GBW                 | Gain-bandwidth product            |                                                                                                          |     | 2                |       | MHz                      |
| SR                  | Slew rate                         | G = +1                                                                                                   |     | 0.8              |       | V/μs                     |
|                     | Settling time, 0.1%               | V <sub>S</sub> = ±18 V, G = 1, 10-V step                                                                 |     | 20               |       | μs                       |
|                     | Settling time, 0.01%              | V <sub>S</sub> = ±18 V, G = 1, 10-V step                                                                 |     | 27               |       | μs                       |
|                     | Overload recovery time            | V <sub>IN</sub> × G = V <sub>S</sub>                                                                     |     | 1                |       | μs                       |
| THD+N               | Total harmonic distortion + noise | 1 kHz, G = 1, V <sub>OUT</sub> = 1 V <sub>RMS</sub>                                                      |     | 0.0001           |       | %                        |

(1) 1000-hour life test at  $+125^\circ\text{C}$  demonstrated randomly distributed variation in the range of measurement limits—approximately  $4\text{ }\mu\text{V}$ .

**Electrical Characteristics: High-Voltage Operation,  $V_S = \pm 4\text{ V}$  to  $\pm 18\text{ V}$  ( $V_S = 8\text{ V}$  to  $36\text{ V}$ ) (continued)**

 at  $T_A = 25^\circ\text{C}$ ,  $R_L = 10\text{ k}\Omega$  connected to  $V_S/2$ , and  $V_{\text{COM}} = V_{\text{OUT}} = V_S/2$ , unless otherwise noted.

| PARAMETER                      |                                                                               | TEST CONDITIONS                                                         | MIN                             | TYP      | MAX | UNIT          |
|--------------------------------|-------------------------------------------------------------------------------|-------------------------------------------------------------------------|---------------------------------|----------|-----|---------------|
| <b>OUTPUT</b>                  |                                                                               |                                                                         |                                 |          |     |               |
| Voltage output swing from rail | No load                                                                       |                                                                         |                                 | 6        | 15  | mV            |
|                                | $R_L = 10\text{ k}\Omega$                                                     |                                                                         |                                 | 220      | 250 | mV            |
|                                | $R_L = 10\text{ k}\Omega$ , $T_A = -40^\circ\text{C}$ to $+105^\circ\text{C}$ |                                                                         |                                 | 310      | 350 | mV            |
| $I_{\text{SC}}$                | Short-circuit current                                                         |                                                                         |                                 | $\pm 18$ |     | mA            |
| $R_O$                          | Open-loop output resistance                                                   | $f = 1\text{ MHz}$ , $I_O = 0$                                          |                                 | 120      |     | $\Omega$      |
| $C_{\text{LOAD}}$              | Capacitive load drive                                                         |                                                                         |                                 | 1        |     | nF            |
| <b>POWER SUPPLY</b>            |                                                                               |                                                                         |                                 |          |     |               |
| $V_S$                          | Operating voltage                                                             |                                                                         | 4 to 36 ( $\pm 2$ to $\pm 18$ ) |          |     | V             |
| $I_Q$                          | Quiescent current (per amplifier)                                             | $V_S = \pm 4\text{ V}$ to $V_S = \pm 18\text{ V}$                       |                                 | 415      | 510 | $\mu\text{A}$ |
|                                |                                                                               | $I_O = 0\text{ mA}$ , $T_A = -40^\circ\text{C}$ to $+105^\circ\text{C}$ |                                 |          | 600 | $\mu\text{A}$ |

## 7.6 Electrical Characteristics: Low-Voltage Operation, $V_S = \pm 2\text{ V}$ to $< \pm 4\text{ V}$ ( $V_S = +4\text{ V}$ to $< +8\text{ V}$ )

at  $T_A = 25^\circ\text{C}$ ,  $R_L = 10\text{ k}\Omega$  connected to  $V_S/2$ , and  $V_{\text{COM}} = V_{\text{OUT}} = V_S/2$ , unless otherwise noted.

| PARAMETER           |                                   | TEST CONDITIONS                                                                                          | MIN | TYP              | MAX        | UNIT                     |
|---------------------|-----------------------------------|----------------------------------------------------------------------------------------------------------|-----|------------------|------------|--------------------------|
| OFFSET VOLTAGE      |                                   |                                                                                                          |     |                  |            |                          |
| V <sub>OS</sub>     | Input offset voltage              |                                                                                                          |     | 6                | 25         | μV                       |
|                     |                                   | T <sub>A</sub> = −40°C to +105°C                                                                         |     | 0.03             | 0.085      | μV/°C                    |
| PSRR                | Power-supply rejection ratio      | V <sub>S</sub> = 4 V to 36 V, V <sub>CM</sub> = V <sub>S</sub> / 2                                       |     | 0.075            | 0.3        | μV/V                     |
|                     |                                   | V <sub>S</sub> = 4 V to 36 V, V <sub>CM</sub> = V <sub>S</sub> / 2, T <sub>A</sub> = −40°C to +105°C     |     |                  | 0.3        | μV/V                     |
|                     | Long-term stability               |                                                                                                          |     | 4 <sup>(1)</sup> |            | μV                       |
|                     | Channel separation, dc            |                                                                                                          |     | 1                |            | μV/V                     |
| INPUT BIAS CURRENT  |                                   |                                                                                                          |     |                  |            |                          |
| I <sub>B</sub>      | Input bias current                | V <sub>CM</sub> = V <sub>S</sub> / 2                                                                     |     | ±160             | ±850       | pA                       |
|                     |                                   | T <sub>A</sub> = −40°C to +105°C                                                                         |     |                  | ±18        | nA                       |
| I <sub>OS</sub>     | Input offset current              |                                                                                                          |     | ±320             | ±1700      | pA                       |
|                     |                                   | T <sub>A</sub> = −40°C to +105°C                                                                         |     |                  | ±6         | nA                       |
| NOISE               |                                   |                                                                                                          |     |                  |            |                          |
| e <sub>n</sub>      | Input voltage noise               | f = 0.1 Hz to 10 Hz                                                                                      |     | 0.25             |            | μV <sub>PP</sub>         |
|                     | Input voltage noise density       | f = 1 kHz                                                                                                |     | 8.8              |            | nV/√Hz                   |
| i <sub>n</sub>      | Input current noise density       | f = 1 kHz                                                                                                |     | 7                |            | fA/√Hz                   |
| INPUT VOLTAGE RANGE |                                   |                                                                                                          |     |                  |            |                          |
| V <sub>CM</sub>     | Common-mode voltage range         | T <sub>A</sub> = −40°C to +105°C                                                                         | V−  |                  | (V+) − 1.5 | V                        |
| CMRR                | Common-mode rejection ratio       | (V−) < V <sub>CM</sub> < (V+) − 1.5 V                                                                    | 106 | 114              |            | dB                       |
|                     |                                   | (V−) + 0.5 V < V <sub>CM</sub> < (V+) − 1.5 V, V <sub>S</sub> = ±2 V                                     | 114 | 120              |            | dB                       |
|                     |                                   | (V−) + 0.5 V < V <sub>CM</sub> < (V+) − 1.5 V, V <sub>S</sub> = ±2 V, T <sub>A</sub> = −40°C to +105°C   | 110 | 120              |            | dB                       |
| INPUT IMPEDANCE     |                                   |                                                                                                          |     |                  |            |                          |
|                     | Differential                      |                                                                                                          |     | 100    6         |            | MΩ    pF                 |
|                     | Common-mode                       |                                                                                                          |     | 6    95          |            | 10 <sup>12</sup> Ω    pF |
| OPEN-LOOP GAIN      |                                   |                                                                                                          |     |                  |            |                          |
| A <sub>OL</sub>     | Open-loop voltage gain            | (V−) + 500 mV < V <sub>O</sub> < (V+) − 500 mV, R <sub>L</sub> = 5 kΩ, V <sub>S</sub> = 5 V              | 110 | 120              |            | dB                       |
|                     |                                   | (V−) + 500 mV < V <sub>O</sub> < (V+) − 500 mV, R <sub>L</sub> = 10 kΩ                                   | 120 | 130              |            | dB                       |
|                     |                                   | (V−) + 500 mV < V <sub>O</sub> < (V+) − 500 mV, R <sub>L</sub> = 10 kΩ, T <sub>A</sub> = −40°C to +105°C | 114 | 120              |            | dB                       |
| FREQUENCY RESPONSE  |                                   |                                                                                                          |     |                  |            |                          |
| GBW                 | Gain-bandwidth product            |                                                                                                          |     | 2                |            | MHz                      |
| SR                  | Slew rate                         | G = +1                                                                                                   |     | 0.8              |            | V/μs                     |
|                     | Overload recovery time            | V <sub>IN</sub> × G = V <sub>S</sub>                                                                     |     | 1                |            | μs                       |
| THD+N               | Total harmonic distortion + noise | 1 kHz, G = 1, V <sub>OUT</sub> = 1 V <sub>RMS</sub>                                                      |     | 0.0001           |            | %                        |

(1) 1000-hour life test at  $+125^\circ\text{C}$  demonstrated randomly distributed variation in the range of measurement limits—approximately  $4\text{ }\mu\text{V}$ .

**Electrical Characteristics: Low-Voltage Operation,  $V_S = \pm 2\text{ V}$  to  $< \pm 4\text{ V}$  ( $V_S = +4\text{ V}$  to  $< +8\text{ V}$ ) (continued)**

at  $T_A = 25^\circ\text{C}$ ,  $R_L = 10\text{ k}\Omega$  connected to  $V_S/2$ , and  $V_{\text{COM}} = V_{\text{OUT}} = V_S/2$ , unless otherwise noted.

| PARAMETER                      |                                                          | TEST CONDITIONS                                         | MIN                 | TYP | MAX | UNIT |
|--------------------------------|----------------------------------------------------------|---------------------------------------------------------|---------------------|-----|-----|------|
| OUTPUT                         |                                                          |                                                         |                     |     |     |      |
| Voltage output swing from rail | No load                                                  |                                                         | 6                   | 15  |     | mV   |
|                                | R <sub>L</sub> = 10 kΩ                                   |                                                         | 220                 | 250 |     | mV   |
|                                | R <sub>L</sub> = 10 kΩ, T <sub>A</sub> = −40°C to +105°C |                                                         | 310                 | 350 |     | mV   |
| I <sub>SC</sub>                | Short-circuit current                                    |                                                         | ±18                 |     |     | mA   |
| R <sub>O</sub>                 | Open-loop output resistance                              | f = 1 MHz, I <sub>O</sub> = 0                           | 120                 |     |     | Ω    |
| C <sub>LOAD</sub>              | Capacitive load drive                                    |                                                         | 1                   |     |     | nF   |
| POWER SUPPLY                   |                                                          |                                                         |                     |     |     |      |
| V <sub>S</sub>                 | Operating voltage range                                  |                                                         | 4 to 36 (±2 to ±18) |     |     | V    |
| I <sub>Q</sub>                 | Quiescent current (per amplifier)                        | V <sub>S</sub> = ±2 V to V <sub>S</sub> = ±4 V          | 385                 | 485 |     | μA   |
|                                |                                                          | I <sub>O</sub> = 0 mA, T <sub>A</sub> = −40°C to +105°C |                     | 590 |     | μA   |
| TEMPERATURE RANGE              |                                                          |                                                         |                     |     |     |      |
|                                | Specified temperature range                              |                                                         | −40                 |     | 105 | °C   |
| T <sub>A</sub>                 | Operating temperature range                              |                                                         | −40                 |     | 125 | °C   |
| T <sub>stg</sub>               | Storage temperature                                      |                                                         | −65                 |     | 150 | °C   |

## 7.7 Typical Characteristics: Table of Graphs

**Table 1. Characteristic Performance Measurements**

| DESCRIPTION                                                    | FIGURE NO.           |
|----------------------------------------------------------------|----------------------|
| Offset Voltage Production Distribution                         | Figure 1             |
| Offset Voltage Drift Distribution                              | Figure 2             |
| Offset Voltage vs Temperature                                  | Figure 3             |
| Offset Voltage vs Common-Mode Voltage                          | Figure 4, Figure 5   |
| Offset Voltage vs Power Supply                                 | Figure 6             |
| $I_B$ and $I_{OS}$ vs Common-Mode Voltage                      | Figure 7             |
| Input Bias Current vs Temperature                              | Figure 8             |
| Output Voltage Swing vs Output Current (Maximum Supply)        | Figure 9             |
| CMRR and PSRR vs Frequency (Referred-to-Input)                 | Figure 10            |
| CMRR vs Temperature                                            | Figure 11, Figure 12 |
| PSRR vs Temperature                                            | Figure 13            |
| 0.1-Hz to 10-Hz Noise                                          | Figure 14            |
| Input Voltage Noise Spectral Density vs Frequency              | Figure 15            |
| THD+N Ratio vs Frequency                                       | Figure 16            |
| THD+N vs Output Amplitude                                      | Figure 17            |
| Quiescent Current vs Supply Voltage                            | Figure 18            |
| Quiescent Current vs Temperature                               | Figure 19            |
| Open-Loop Gain and Phase vs Frequency                          | Figure 20            |
| Closed-Loop Gain vs Frequency                                  | Figure 21            |
| Open-Loop Gain vs Temperature                                  | Figure 22            |
| Open-Loop Output Impedance vs Frequency                        | Figure 23            |
| Small-Signal Overshoot vs Capacitive Load (100-mV Output Step) | Figure 24, Figure 25 |
| No Phase Reversal                                              | Figure 26            |
| Positive Overload Recovery                                     | Figure 27            |
| Negative Overload Recovery                                     | Figure 28            |
| Small-Signal Step Response (100 mV)                            | Figure 29, Figure 30 |
| Large-Signal Step Response                                     | Figure 31, Figure 32 |
| Large-Signal Settling Time (10-V Positive Step)                | Figure 33            |
| Large-Signal Settling Time (10-V Negative Step)                | Figure 34            |
| Short-Circuit Current vs Temperature                           | Figure 35            |
| Maximum Output Voltage vs Frequency                            | Figure 36            |
| Channel Separation vs Frequency                                | Figure 37            |
| EMIRR IN+ vs Frequency                                         | Figure 38            |

## 7.8 Typical Characteristics

$V_S = \pm 18\text{ V}$ ,  $V_{CM} = V_S/2$ ,  $R_{LOAD} = 10\text{ k}\Omega$  connected to  $V_S/2$ , and  $C_L = 100\text{ pF}$ , unless otherwise noted.

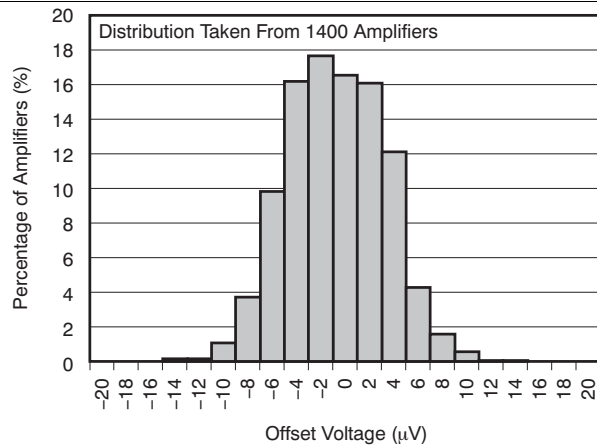


Figure 1. Offset Voltage Production Distribution

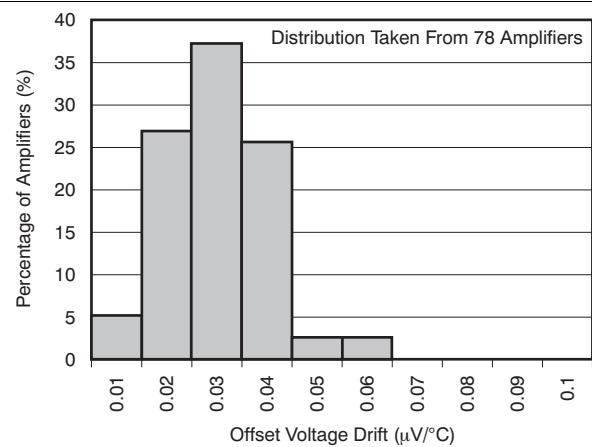


Figure 2. Offset Voltage Drift Distribution

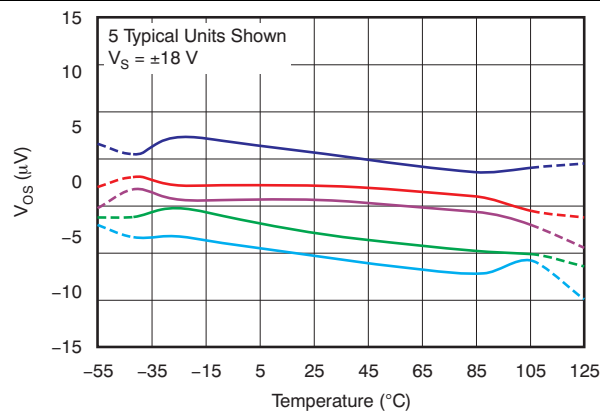


Figure 3. Offset Voltage vs Temperature

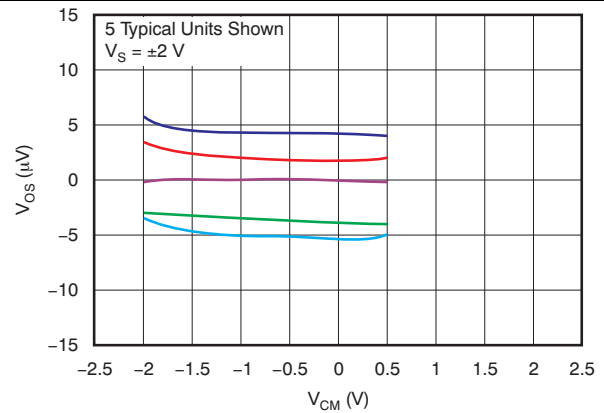


Figure 4. Offset Voltage vs Common-Mode Voltage

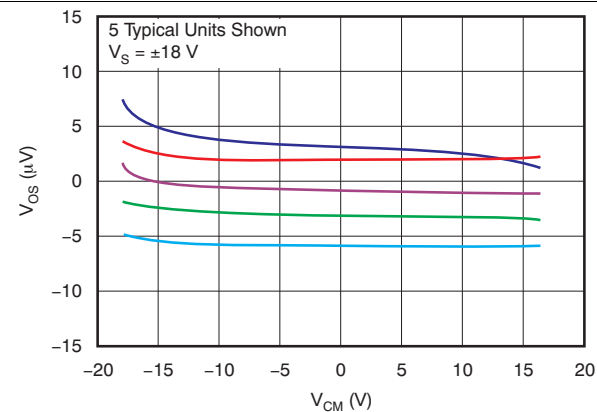


Figure 5. Offset Voltage vs Common-Mode Voltage

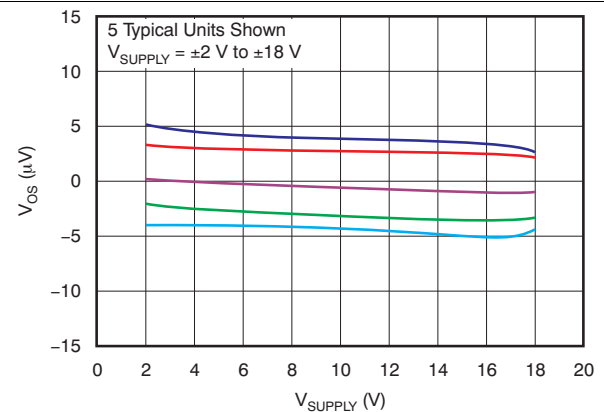


Figure 6. Offset Voltage vs Power Supply

## Typical Characteristics (continued)

$V_S = \pm 18\text{ V}$ ,  $V_{CM} = V_S/2$ ,  $R_{LOAD} = 10\text{ k}\Omega$  connected to  $V_S/2$ , and  $C_L = 100\text{ pF}$ , unless otherwise noted.

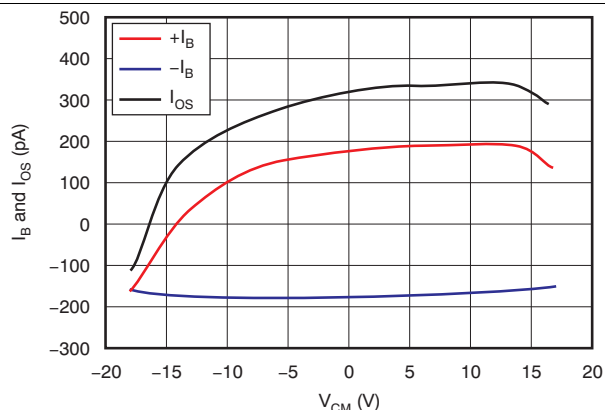


Figure 7.  $I_B$  and  $I_{OS}$  vs Common-Mode Voltage

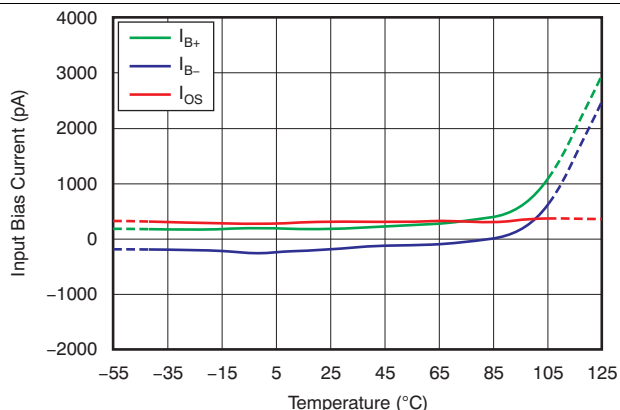


Figure 8. Input Bias Current vs Temperature

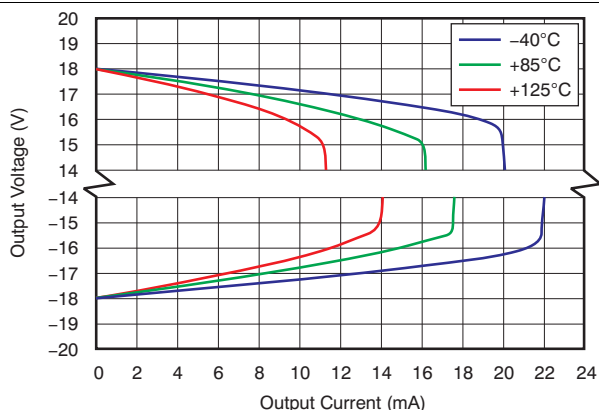


Figure 9. Output Voltage Swing vs Output Current (Maximum Supply)

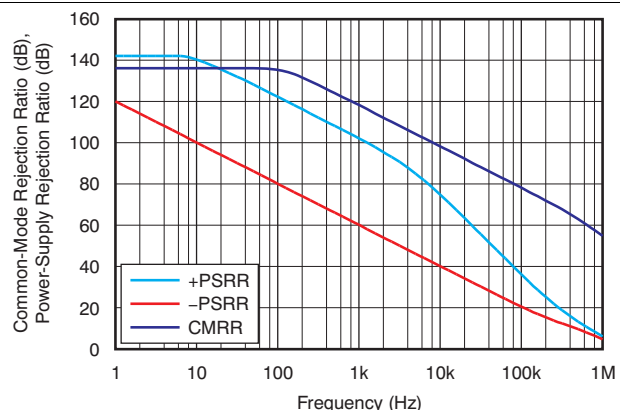


Figure 10. CMRR and PSRR vs Frequency (Referred-to-Input)

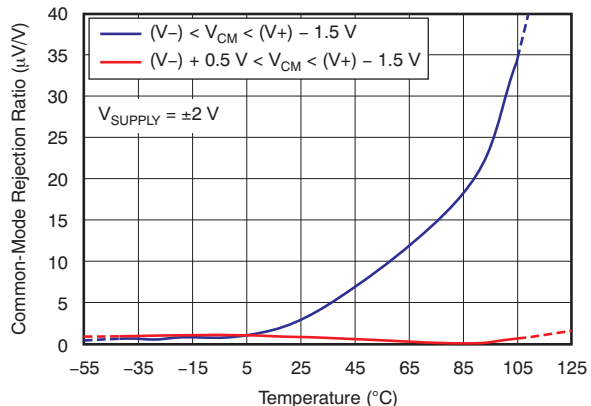


Figure 11. CMRR vs Temperature

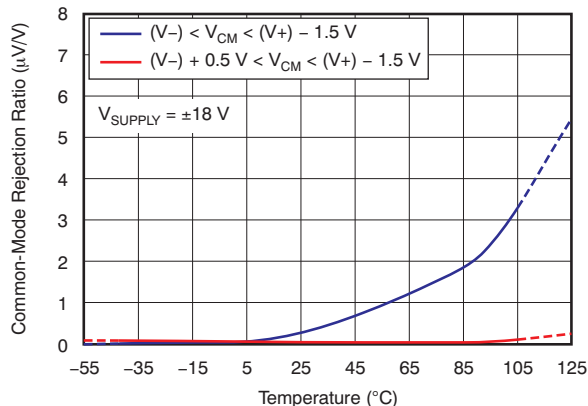


Figure 12. CMRR vs Temperature

## Typical Characteristics (continued)

$V_S = \pm 18\text{ V}$ ,  $V_{CM} = V_S/2$ ,  $R_{LOAD} = 10\text{ k}\Omega$  connected to  $V_S/2$ , and  $C_L = 100\text{ pF}$ , unless otherwise noted.

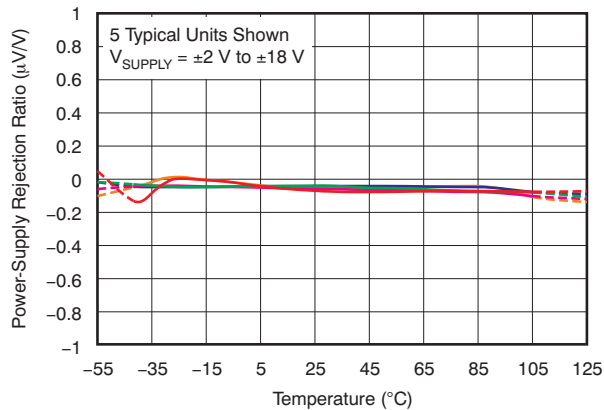


Figure 13. PSRR vs Temperature

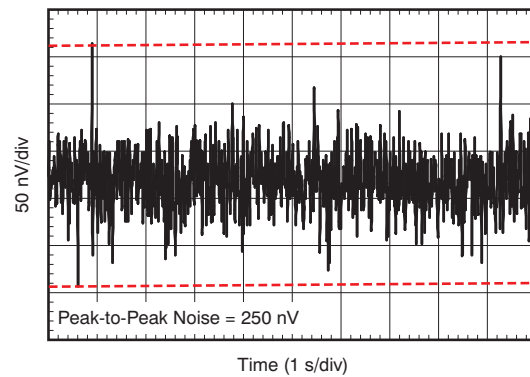


Figure 14. 0.1-Hz to 10-Hz Noise

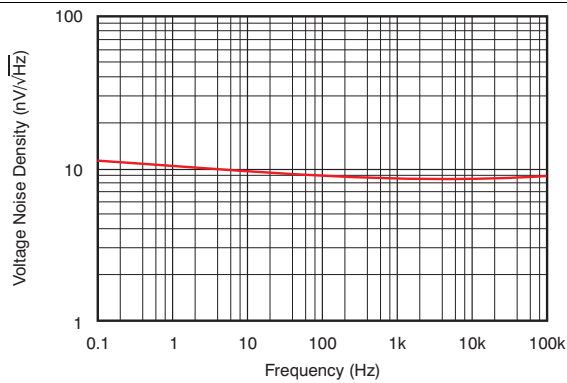


Figure 15. Input Voltage Noise Spectral Density vs Frequency

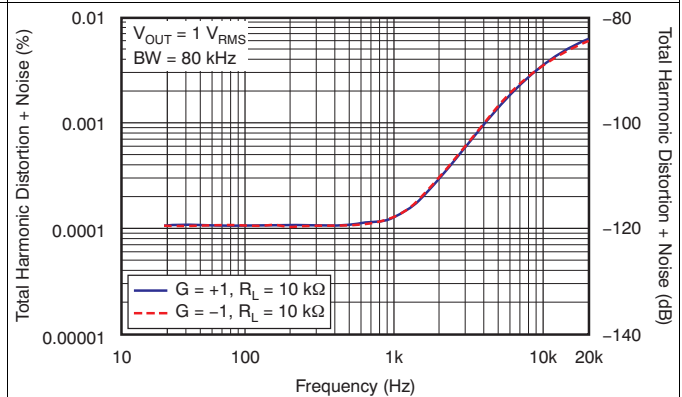


Figure 16. THD+N Ratio vs Frequency

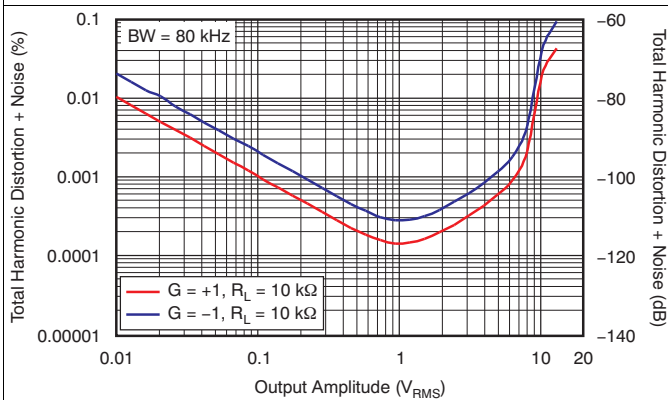


Figure 17. THD+N vs Output Amplitude


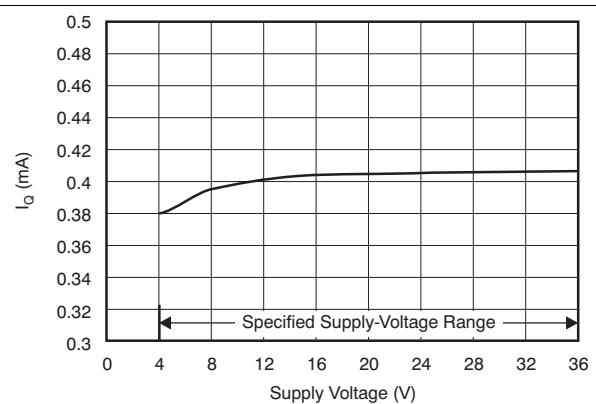



Figure 18. Quiescent Current vs Supply Voltage

## Typical Characteristics (continued)


$V_S = \pm 18\text{ V}$ ,  $V_{CM} = V_S/2$ ,  $R_{LOAD} = 10\text{ k}\Omega$  connected to  $V_S/2$ , and  $C_L = 100\text{ pF}$ , unless otherwise noted.

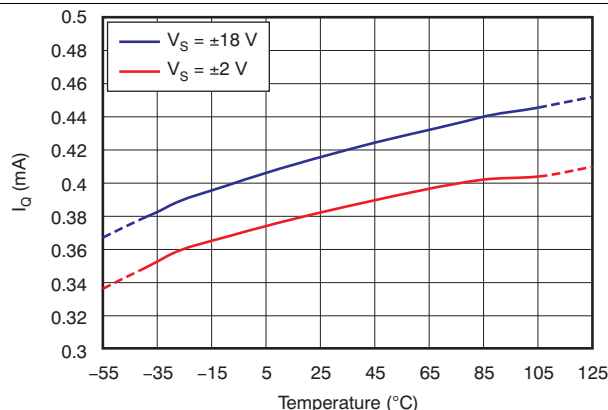


**Figure 19. Quiescent Current vs Temperature**

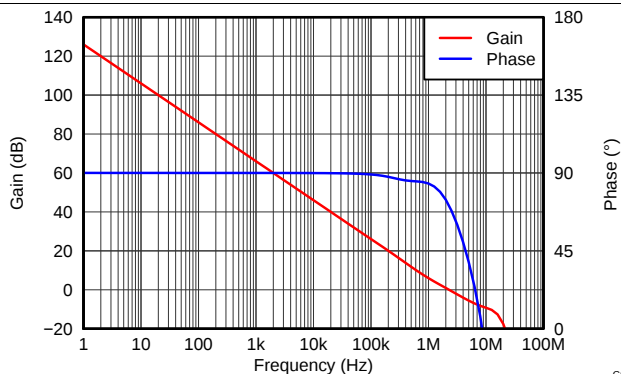


**Figure 20. Open-Loop Gain and Phase vs Frequency**

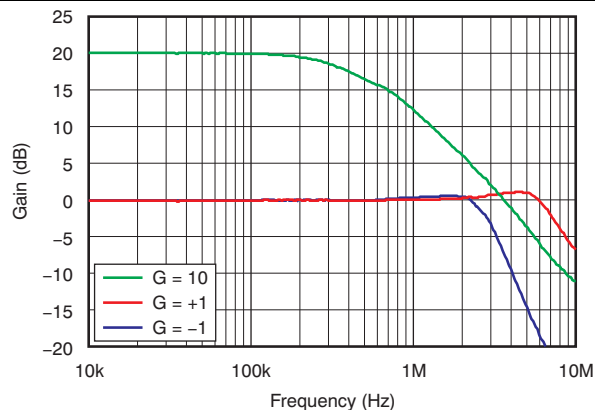


**Figure 21. Closed-Loop Gain vs Frequency**

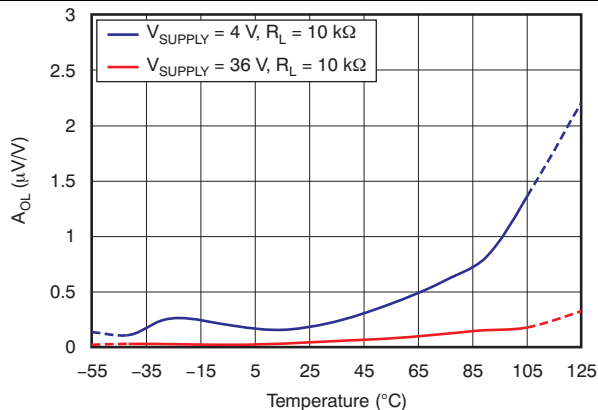

**Figure 22. Open-Loop Gain vs Temperature**

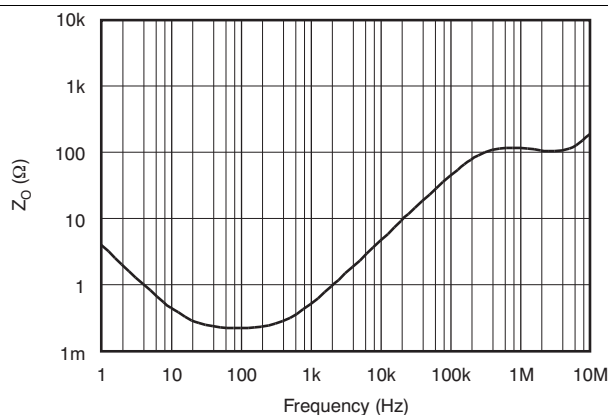

**Figure 23. Open-Loop Output Impedance vs Frequency**

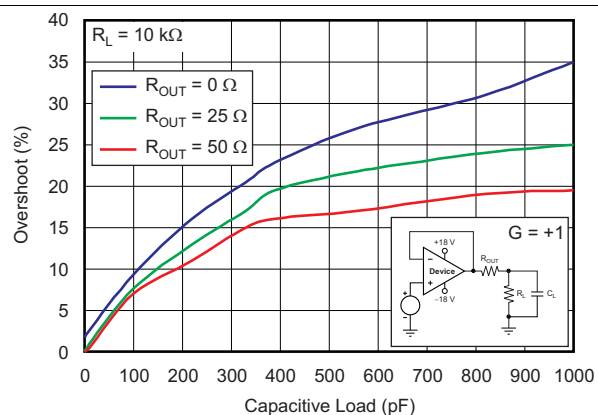

**Figure 24. Small-Signal Overshoot vs Capacitive Load (100-mV Output Step)**

## Typical Characteristics (continued)

$V_S = \pm 18\text{ V}$ ,  $V_{CM} = V_S/2$ ,  $R_{LOAD} = 10\text{ k}\Omega$  connected to  $V_S/2$ , and  $C_L = 100\text{ pF}$ , unless otherwise noted.

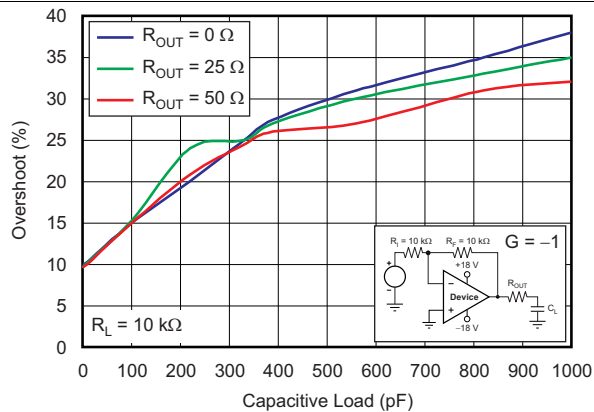


Figure 25. Small-Signal Overshoot vs Capacitive Load (100-mV Output Step)

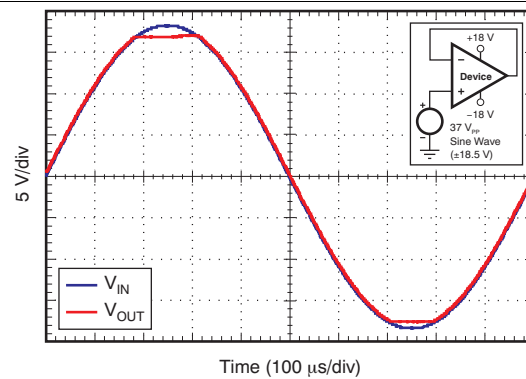


Figure 26. No Phase Reversal

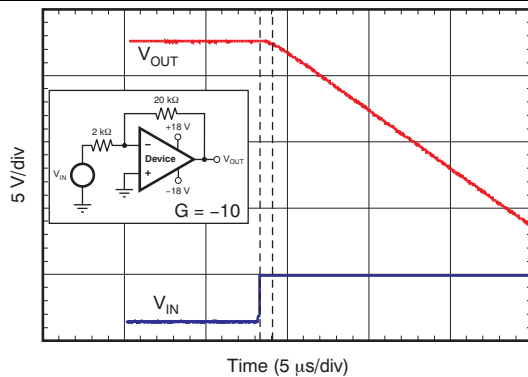


Figure 27. Positive Overload Recovery

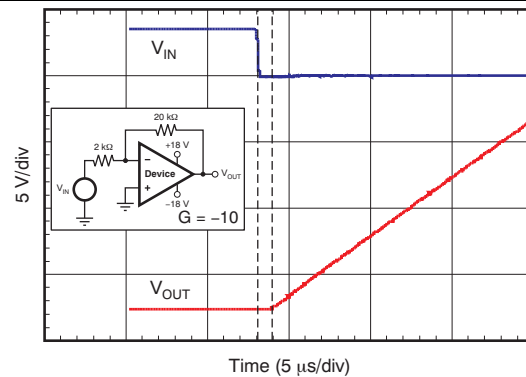


Figure 28. Negative Overload Recovery

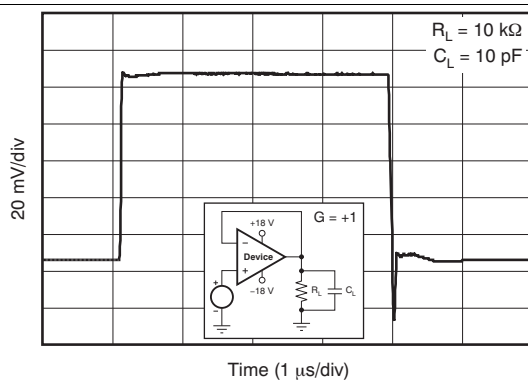


Figure 29. Small-Signal Step Response (100 mV)


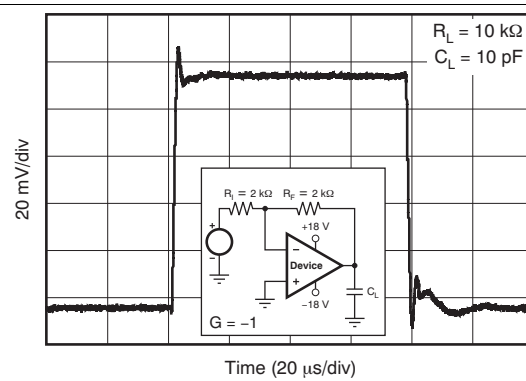



Figure 30. Small-Signal Step Response (100 mV)

## Typical Characteristics (continued)


$V_S = \pm 18\text{ V}$ ,  $V_{CM} = V_S/2$ ,  $R_{LOAD} = 10\text{ k}\Omega$  connected to  $V_S/2$ , and  $C_L = 100\text{ pF}$ , unless otherwise noted.

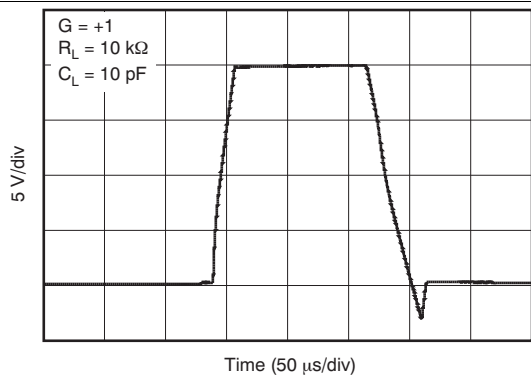


**Figure 31. Large-Signal Step Response**

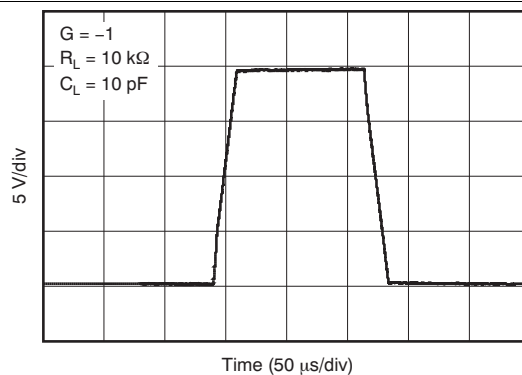


**Figure 32. Large-Signal Step Response**

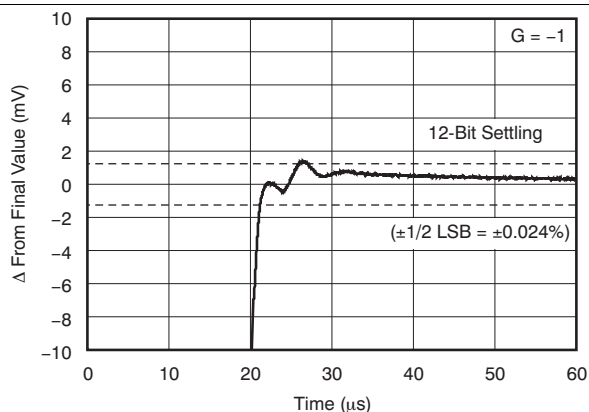


**Figure 33. Large-Signal Settling Time (10-V Positive Step)**

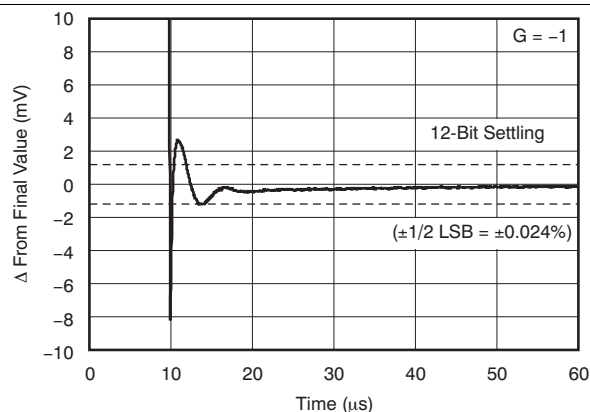

**Figure 34. Large-Signal Settling Time (10-V Negative Step)**

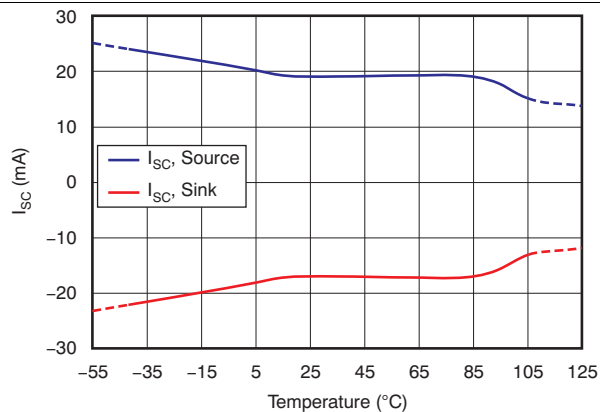

**Figure 35. Short-Circuit Current vs Temperature**

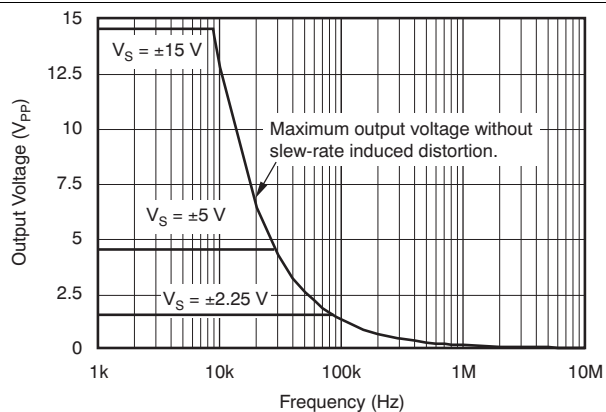

**Figure 36. Maximum Output Voltage vs Frequency**

## OPA2188

ZHCS372C – AUGUST 2011 – REVISED JUNE 2016

[www.ti.com.cn](http://www.ti.com.cn)

### Typical Characteristics (continued)

$V_S = \pm 18\text{ V}$ ,  $V_{CM} = V_S/2$ ,  $R_{LOAD} = 10\text{ k}\Omega$  connected to  $V_S/2$ , and  $C_L = 100\text{ pF}$ , unless otherwise noted.

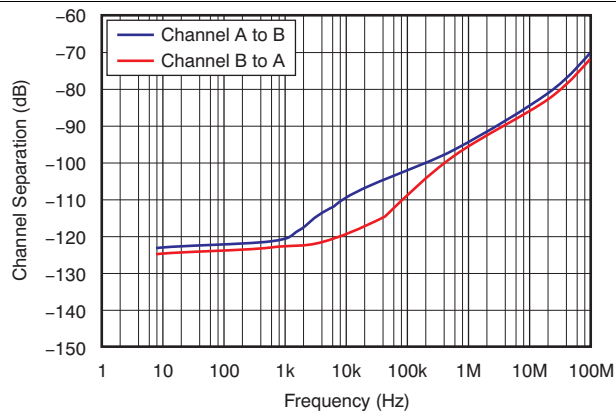


Figure 37. Channel Separation vs Frequency

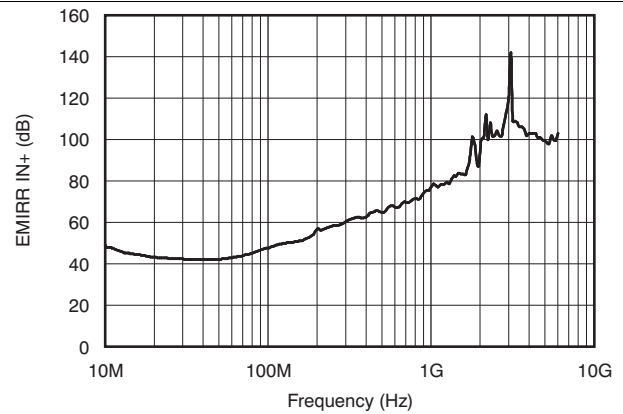



Figure 38. EMIRR IN+ vs Frequency

## 8 Detailed Description

### 8.1 Overview

The OPA2188 operational amplifier combines precision offset and drift with excellent overall performance, making the device ideal for many precision applications. The precision offset drift of only  $0.085 \mu\text{V}/^\circ\text{C}$  provides stability over the entire temperature range. In addition, the device offers excellent overall performance with high CMRR, PSRR, and  $A_{OL}$ . As with all amplifiers, applications with noisy or high-impedance power supplies require decoupling capacitors close to the device pins. In most cases,  $0.1\text{-}\mu\text{F}$  capacitors are adequate.

### 8.2 Functional Block Diagram

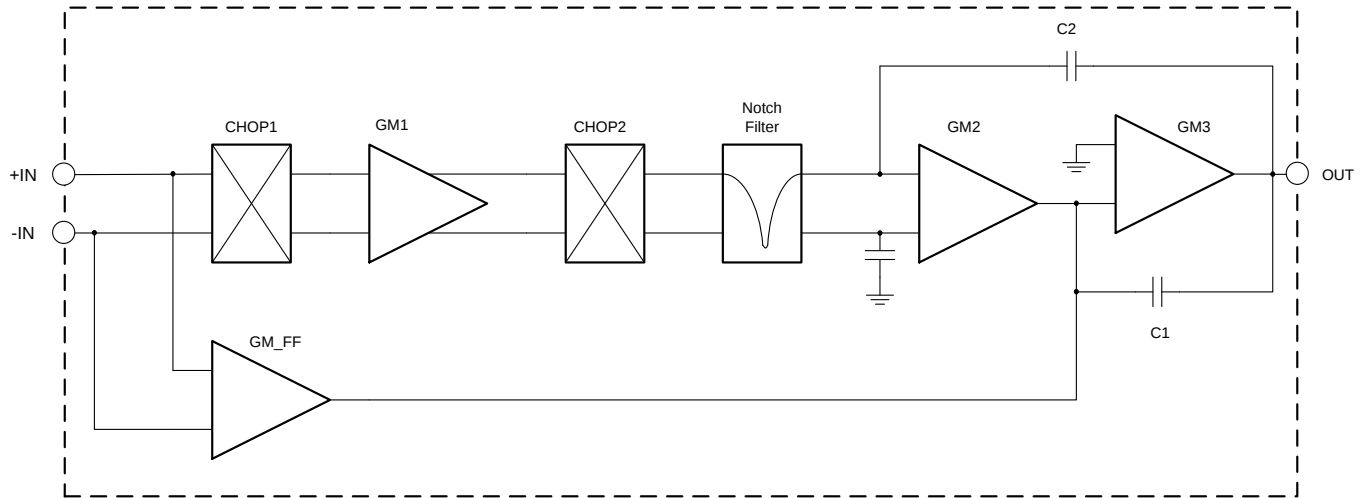


## 8.3 Feature Description

### 8.3.1 Operating Characteristics

The OPA2188 is specified for operation from 4 V to 36 V ( $\pm 2$  V to  $\pm 18$  V). Many of the specifications apply from  $-40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$ . Parameters that can exhibit significant variance with regard to operating voltage or temperature are presented in the [Typical Characteristics](#).

### 8.3.2 EMI Rejection


The OPA2188 uses integrated electromagnetic interference (EMI) filtering to reduce the effects of EMI interference from sources such as wireless communications and densely populated boards with a mix of analog signal chain and digital components. EMI immunity can be improved with circuit design techniques; the OPAX188 benefits from these design improvements. Texas Instruments has developed the ability to accurately measure and quantify the immunity of an operational amplifier over a broad frequency spectrum extending from 10 MHz to 6 GHz. [Figure 39](#) shows the results of this testing on the OPA2188. Detailed information can also be found in the application report *EMI Rejection Ratio of Operational Amplifiers (SBOA128)*, available for download from [the TI website](#).

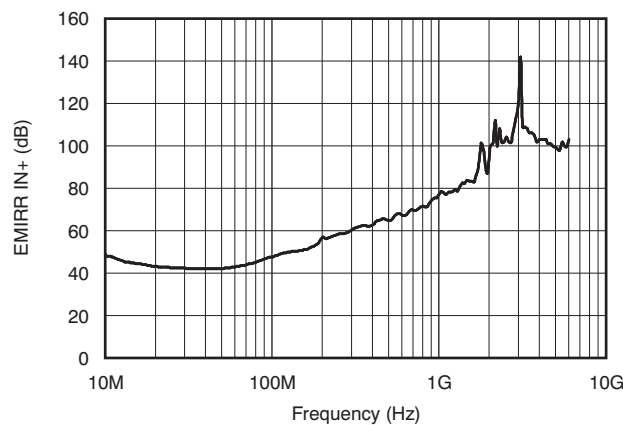

**Figure 39. EMIRR Testing**

### 8.3.3 Phase-Reversal Protection

The OPA2188 device has an internal phase-reversal protection. Many op amps exhibit a phase reversal when the input is driven beyond its linear common-mode range. This condition is most often encountered in noninverting circuits when the input is driven beyond the specified common-mode voltage range, causing the output to reverse into the opposite rail. The OPA2188 input prevents phase reversal with excessive common-mode voltage. Instead, the output limits into the appropriate rail. This performance is shown in [Figure 40](#).

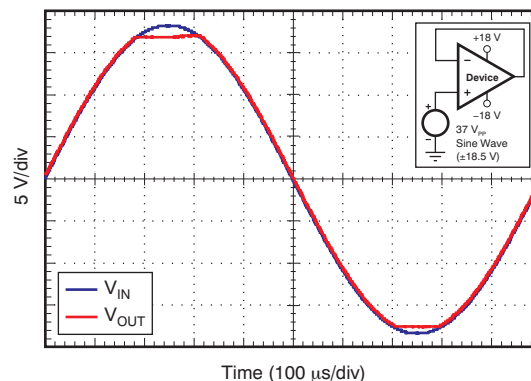

**Figure 40. No Phase Reversal**

## Feature Description (continued)

### 8.3.4 Capacitive Load and Stability

The dynamic characteristics of the OPA2188 have been optimized for a range of common operating conditions. The combination of low closed-loop gain and high capacitive loads decreases the phase margin of the amplifier and can lead to gain peaking or oscillations. As a result, heavier capacitive loads must be isolated from the output. The simplest way to achieve this isolation is to add a small resistor (for example,  $R_{OUT}$  equal to 50  $\Omega$ ) in series with the output. Figure 41 and Figure 42 illustrate graphs of small-signal overshoot versus capacitive load for several values of  $R_{OUT}$ . Also, refer to the applications report, *Feedback Plots Define Op Amp AC Performance (SBOA015)*, available for download from [the TI website](#), for details of analysis techniques and application circuits.

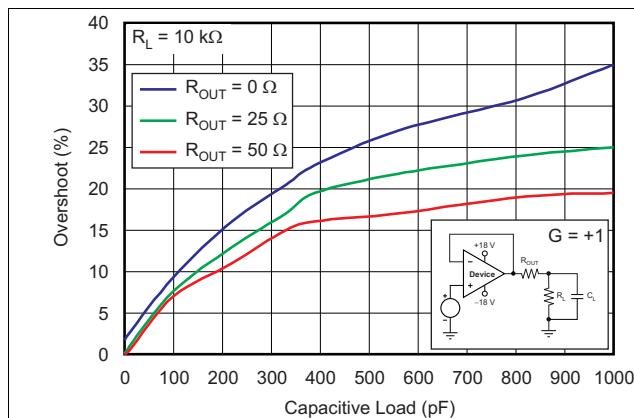


Figure 41. Small-Signal Overshoot vs Capacitive Load (100-mV Output Step)

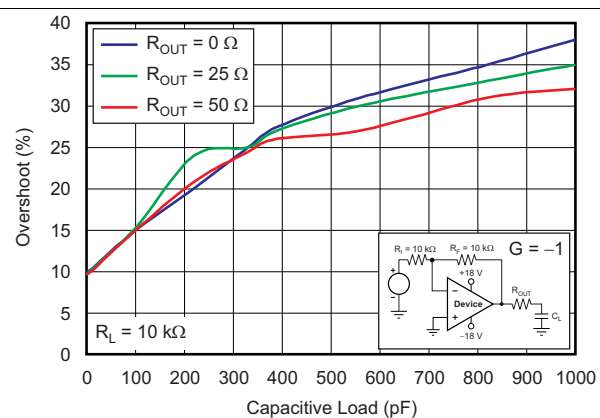


Figure 42. Small-Signal Overshoot vs Capacitive Load (100-mV Output Step)

### 8.3.5 Electrical Overstress

Designers often ask questions about the capability of an operational amplifier to withstand electrical overstress. These questions tend to focus on the device inputs, but may involve the supply voltage pins or even the output pin. Each of these different pin functions have electrical stress limits determined by the voltage breakdown characteristics of the particular semiconductor fabrication process and specific circuits connected to the pin. Additionally, internal electrostatic discharge (ESD) protection is built into these circuits to protect them from accidental ESD events both before and during product assembly.

These ESD protection diodes also provide in-circuit, input overdrive protection, as long as the current is limited to 10 mA as stated in the *Absolute Maximum Ratings*. Figure 43 shows how a series input resistor may be added to the driven input to limit the input current. The added resistor contributes thermal noise at the amplifier input and its value should be kept to a minimum in noise-sensitive applications.

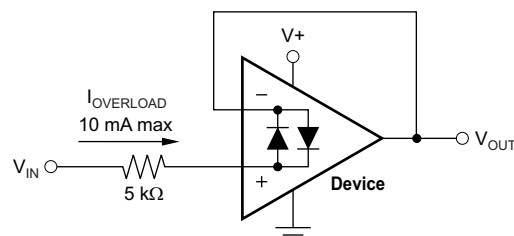


Figure 43. Input Current Protection

## **Feature Description (continued)**

An ESD event produces a short duration, high-voltage pulse that is transformed into a short duration, high-current pulse as it discharges through a semiconductor device. The ESD protection circuits are designed to provide a current path around the operational amplifier core to prevent it from being damaged. The energy absorbed by the protection circuitry is then dissipated as heat.

When the operational amplifier connects into a circuit, the ESD protection components are intended to remain inactive and not become involved in the application circuit operation. However, circumstances may arise where an applied voltage exceeds the operating voltage range of a given pin. Should this condition occur, there is a risk that some of the internal ESD protection circuits may be biased on, and conduct current. Any such current flow occurs through ESD cells and rarely involves the absorption device.

If there is an uncertainty about the ability of the supply to absorb this current, external zener diodes may be added to the supply pins. The zener voltage must be selected such that the diode does not turn on during normal operation.

However, its zener voltage must be low enough so that the zener diode conducts if the supply pin begins to rise above the safe operating supply voltage level.

## **8.4 Device Functional Modes**

The OPA2188 device has a single functional mode. The device is powered on as long as the power supply voltage is between 4 V ( $\pm 2$  V) and 36 V ( $\pm 18$  V).

## 9 Application and Implementation

### NOTE


Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 9.1 Application Information

### 9.2 Typical Applications

#### 9.2.1 High-Side Voltage-to-Current (V-I) Converter

The circuit shown in Figure 44 is a high-side voltage-to-current (V-I) converter. It translates an input voltage of 0 V to 2 V to an output current of 0 mA to 100 mA. Figure 45 shows the measured transfer function for this circuit. The low offset voltage and offset drift of the OPA2188 facilitate excellent dc accuracy for the circuit.

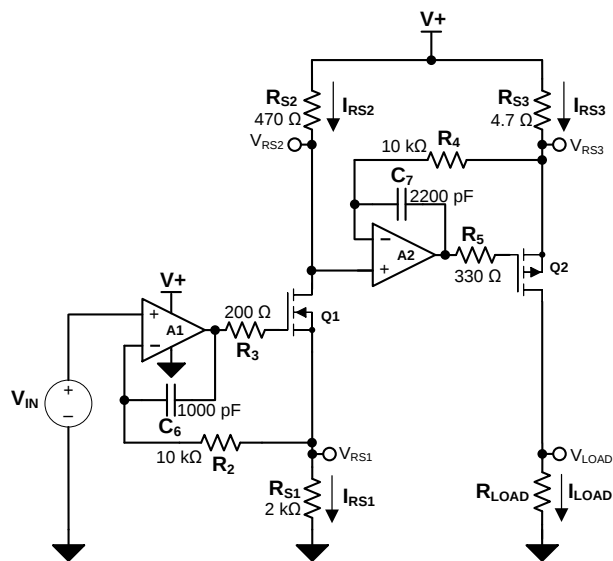

Copyright © 2016, Texas Instruments Incorporated

Figure 44. High-Side Voltage-to-Current (V-I) Converter

## Typical Applications (continued)

### 9.2.1.1 Design Requirements

The design requirements are as follows:

- Supply Voltage: 5 V DC
- Input: 0 V to 2 V DC
- Output: 0 mA to 100 mA DC


### 9.2.1.2 Detailed Design Procedure

The V-I transfer function of the circuit is based on the relationship between the input voltage,  $V_{IN}$ , and the three current sensing resistors,  $R_{S1}$ ,  $R_{S2}$ , and  $R_{S3}$ . The relationship between  $V_{IN}$  and  $R_{S1}$  determines the current that flows through the first stage of the design. The current gain from the first stage to the second stage is based on the relationship between  $R_{S2}$  and  $R_{S3}$ .

For a successful design, pay close attention to the dc characteristics of the operational amplifier chosen for the application. To meet the performance goals, this application benefits from an operational amplifier with low offset voltage, low temperature drift, and rail-to-rail output. The OPA2188 CMOS operational amplifier is a high-precision, ultra-low offset, ultra-low drift amplifier optimized for low-voltage, single-supply operation with an output swing to within 15 mV of the positive rail. The OPA2188 family uses chopping techniques to provide low initial offset voltage and near-zero drift over time and temperature. Low offset voltage and low drift reduce the offset error in the system, making these devices appropriate for precise dc control. The rail-to-rail output stage of the OPA2188 ensures that the output swing of the operational amplifier is able to fully control the gate of the MOSFET devices within the supply rails.

A detailed error analysis, design procedure, and additional measured results are given in [TIPD102](#).

### 9.2.1.3 Application Curve

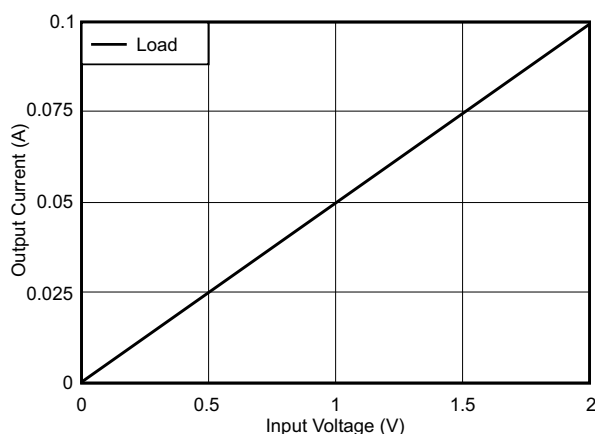


**Figure 45. Measured Transfer Function for High-Side V-I Converter**

## 9.3 System Examples

### 9.3.1 Discrete INA + Attenuation for ADC With 3.3-V Supply


The application examples of [Figure 46](#) and [Figure 47](#) highlight only a few of the circuits where the OPA2188 can be used.

### System Examples (continued)

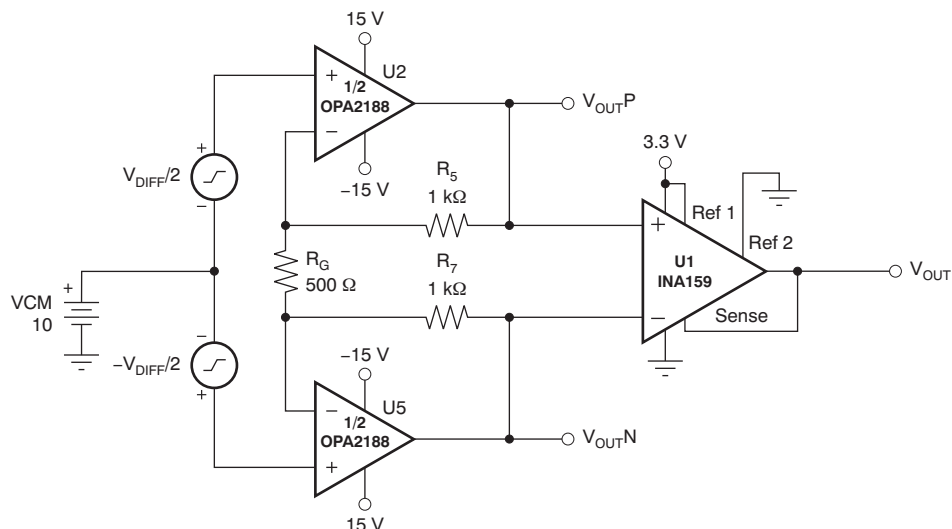

**Figure 46. Discrete INA + Attenuation for ADC with 3.3-V Supply**

### 9.3.2 RTD Amplifier with Linearization

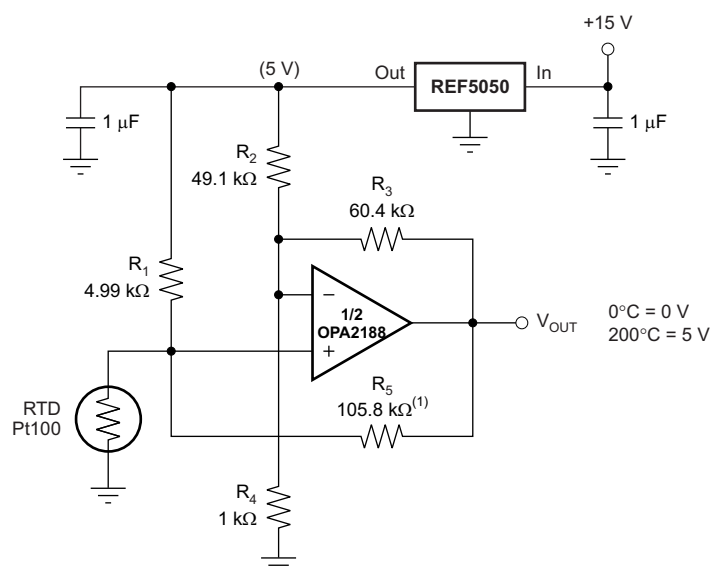

(1)  $R_5$  provides positive-varying excitation to linearize output.

### Figure 47. RTD Amplifier with Linearization

## 10 Power Supply Recommendations

The OPA2188 is specified for operation from 4 V to 36 V ( $\pm 2$  V to  $\pm 18$  V); many specifications apply from  $-40^{\circ}\text{C}$  to  $105^{\circ}\text{C}$ . The [Typical Characteristics](#) presents parameters that can exhibit significant variance with regard to operating voltage or temperature.

**CAUTION**

Supply voltages larger than 40 V can permanently damage the device (see the [Absolute Maximum Ratings](#)).

TI recommends placing 0.1- $\mu$ F bypass capacitors close to the power-supply pins to reduce errors coupling in from noisy or high-impedance power supplies. For more detailed information on bypass capacitor placement, refer to the [Layout Guidelines](#) section.


## 11 Layout

### 11.1 Layout Guidelines

Pay attention to good layout practices. Keep traces short and when possible, use a printed-circuit-board (PCB) ground plane with surface-mount components placed as close to the device pins as possible. Place a 0.1- $\mu$ F capacitor closely across the supply pins. Apply these guidelines throughout the analog circuit to improve performance and provide benefits, such as reducing the electromagnetic interference (EMI) susceptibility.

Operational amplifiers vary in susceptibility to radio frequency interference (RFI). RFI can generally be identified as a variation in offset voltage or DC signal levels with changes in the interfering RF signal. The OPA2188 is specifically designed to minimize susceptibility to RFI and demonstrates remarkably low sensitivity compared to previous generation devices. Strong RF fields may still cause varying offset levels.

### 11.2 Layout Example

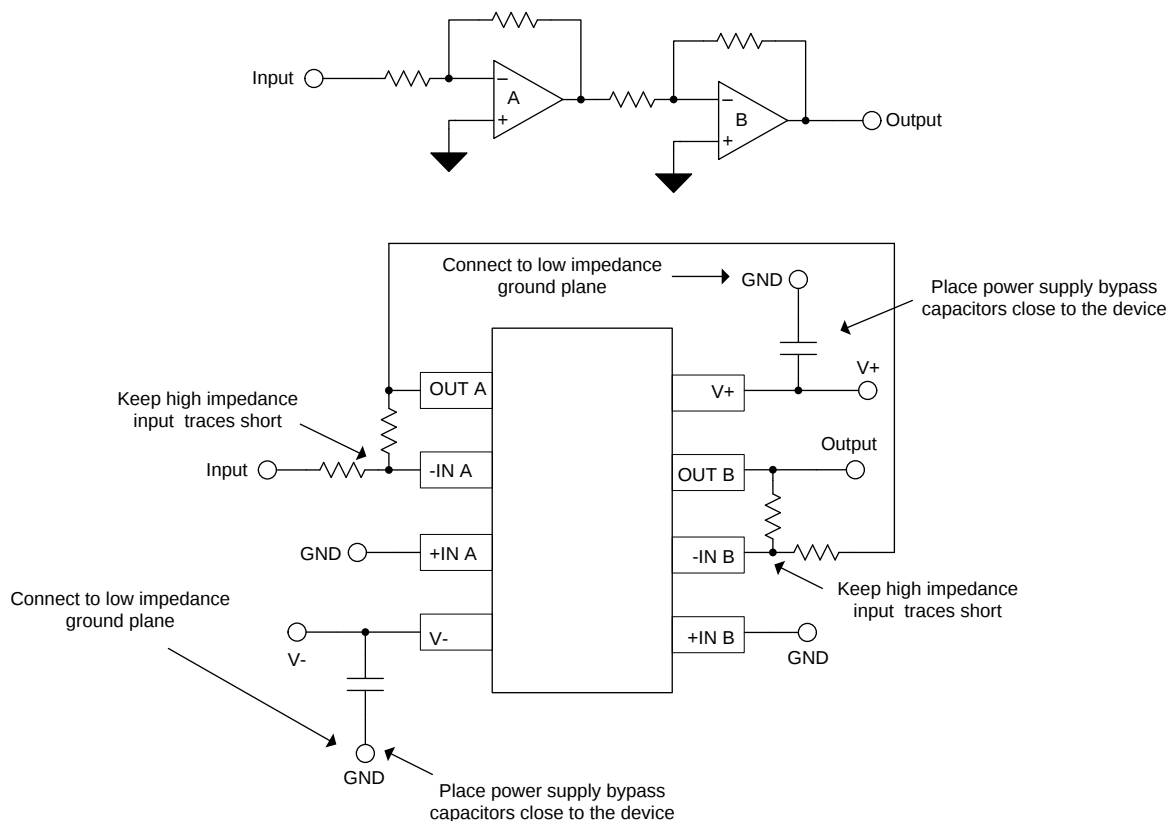

Copyright © 2016, Texas Instruments Incorporated

**Figure 48. Layout Example**

## 12 器件和文档支持

### 12.1 器件支持

#### 12.1.1 开发支持

##### 12.1.1.1 TINA-TI™ (免费下载)

TINA™是一款简单、功能强大且易于使用的电路仿真程序，此程序基于 SPICE 引擎。TINA-TI™ 是 TINA 软件的一款免费全功能版本，除了一系列无源和有源模型外，此版本软件还预先载入了一个宏模型库。TINA-TI 提供所有传统的 SPICE 直流、瞬态和频域分析，以及其他设计功能。

TINA-TI 可从 Analog eLab Design Center (模拟电子实验室设计中心) [免费下载](#)，它提供全面的后续处理能力，使得用户能够以多种方式形成结果。虚拟仪器提供选择输入波形和探测电路节点、电压和波形的功能，从而创建一个动态的快速入门工具。

---

**注**

这些文件需要安装 TINA 软件 (由 DesignSoft™提供) 或者 TINA-TI 软件。请从 [TINA-TI 文件夹](#) 中下载免费的 TINA-TI 软件。

---

##### 12.1.1.2 DIP 适配器 EVM

[DIP 适配器 EVM](#) 工具提供了一种简单而低成本的方式来针对小型表面贴装 IC 进行原型设计。评估工具适用于以下 TI 封装: D 或 U (SOIC-8)、PW (TSSOP-8)、DGK (MSOP-8)、DBV (SOT23-6、SOT23-5 和 SOT23-3)、DCK (SC70-6 和 SC70-5) 和 DRL (SOT563-6)。DIP 适配器 EVM 也可搭配引脚排使用或直接与现有电路相连。

##### 12.1.1.3 通用运放 EVM

[通用运放 EVM](#) 是一系列通用空白电路板，可简化采用各种 IC 封装类型的电路板原型设计。借助评估模块电路板设计，可以轻松快速地构造多种不同电路。共有 5 个模型可供选用，每个模型都对应一种特定封装类型。支持 PDIP、SOIC、MSOP、TSSOP 和 SOT23 封装。

---

**注**

这些电路板均为空白电路板，用户必须自行提供 IC。TI 建议您在订购通用运放 EVM 时申请几个运放器件样品。

---

##### 12.1.1.4 TI 高精度设计

TI 高精度设计是由 TI 公司的高精度模拟应用专家创建的模拟解决方案，提供了许多实用电路的工作原理、组件选择、仿真、完整 PCB 电路原理图和布局布线、物料清单以及性能测量结果。欲获取 TI 高精度设计，请访问 <http://www.ti.com.cn/www/analog/precision-designs/>。

##### 12.1.1.5 WEBENCH®滤波器设计器

[WEBENCH® 滤波器设计器](#)是一款简单、功能强大且便于使用的有源滤波器设计程序。WEBENCH Filter Designer 通过选择 TI 运算放大器以及 TI 供应商合作伙伴的无源组件来构建优化滤波器设计方案。

WEBENCH® 设计中心以基于网络的工具形式提供 [WEBENCH® Filter Designer](#)。用户通过该工具可在短时间内完成多级有源滤波器解决方案的设计、优化和仿真。

## 12.2 文档支持

### 12.2.1 相关文档

使用 OPA2188 时，建议参考下列相关文档。可从 [www.ti.com](http://www.ti.com) 下载，除非另外注明。

- [《运算放大器的电磁干扰 \(EMI\) 抑制比》](#)。
- [《反馈曲线图定义运算放大器交流性能》](#)
- [运算放大器性能分析](#)。
- [运算放大器的单电源操作](#)

## 文档支持 (continued)

- [调优放大器](#).

### 12.3 接收文档更新通知

如需接收文档更新通知，请访问 [ti.com](#) 上的器件产品文件夹。点击右上角的提醒我 (Alert me) 注册后，即可每周定期收到已更改的产品信息。有关更改的详细信息，请查阅已修订文档中包含的修订历史记录。

### 12.4 社区资源

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

**TI E2E™ Online Community** *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At [e2e.ti.com](#), you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

**Design Support** *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

### 12.5 商标

TINA-TI, E2E are trademarks of Texas Instruments.  
WEBENCH is a registered trademark of Texas Instruments.  
TINA, DesignSoft are trademarks of DesignSoft, Inc.  
All other trademarks are the property of their respective owners.

### 12.6 静电放电警告



ESD 可能会损坏该集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理措施和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

### 12.7 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

## 13 机械、封装和可订购信息

以下页中包括机械、封装和可订购信息。这些信息是针对指定器件可提供的最新数据。这些数据会在无通知且不对本文档进行修订的情况下发生改变。欲获得该数据表的浏览器版本，请查阅左侧的导航栏。

## 重要声明

德州仪器(TI) 及其下属子公司有权根据 JESD46 最新标准, 对所提供的产品和服务进行更正、修改、增强、改进或其它更改, 并有权根据 JESD48 最新标准中止提供任何产品和服务。客户在下订单前应获取最新的相关信息, 并验证这些信息是否完整且是最新的。所有产品的销售都遵循在订单确认时所提供的TI 销售条款与条件。

TI 保证其所销售的组件的性能符合产品销售时 TI 半导体产品销售条件与条款的适用规范。仅在 TI 保证的范围内, 且 TI 认为 有必要时才会使用测试或其它质量控制技术。除非适用法律做出了硬性规定, 否则没有必要对每种组件的所有参数进行测试。

TI 对应用帮助或客户产品设计不承担任何义务。客户应对其使用 TI 组件的产品和应用自行负责。为尽量减小与客户产品和应用相关的风险, 客户应提供充分的设计与操作安全措施。

TI 不对任何 TI 专利权、版权、屏蔽作品权或其它与使用了 TI 组件或服务的组合设备、机器或流程相关的 TI 知识产权中授予 的直接或隐含权限作出任何保证或解释。TI 所发布的与第三方产品或服务有关的信息, 不能构成从 TI 获得使用这些产品或服务 的许可、授权、或认可。使用此类信息可能需要获得第三方的专利权或其它知识产权方面的许可, 或是 TI 的专利权或其它 知识产权方面的许可。

对于 TI 的产品手册或数据表中 TI 信息的重要部分, 仅在没有对内容进行任何篡改且带有相关授权、条件、限制和声明的情况 下才允许进行复制。TI 对此类篡改过的文件不承担任何责任或义务。复制第三方的信息可能需要服从额外的限制条件。

在转售 TI 组件或服务时, 如果对该组件或服务参数的陈述与 TI 标明的参数相比存在差异或虚假成分, 则会失去相关 TI 组件 或服务的所有明示或暗示授权, 且这是不正当的、欺诈性商业行为。TI 对任何此类虚假陈述均不承担任何责任或义务。

客户认可并同意, 尽管任何应用相关信息或支持仍可能由 TI 提供, 但他们将独力负责满足与其产品及其应用中使用的 TI 产品 相关的所有法律、法规和安全相关要求。客户声明并同意, 他们具备制定与实施安全措施所需的全部专业技术和知识, 可预见 故障的危险后果、监测故障及其后果、降低有可能造成人身伤害的故障的发生机率并采取适当的补救措施。客户将全额赔偿因 在此类安全关键应用中使用任何 TI 组件而对 TI 及其代理造成的任何损失。

在某些场合中, 为了推进安全相关应用有可能对 TI 组件进行特别的促销。TI 的目标是利用此类组件帮助客户设计和创立其特 有的可满足适用的功能安全性标准和要求的终端产品解决方案。尽管如此, 此类组件仍然服从这些条款。

TI 组件未获得用于 FDA Class III (或类似的生命攸关医疗设备) 的授权许可, 除非各方授权官员已经达成了专门管控此类使 用的特别协议。

只有那些 TI 特别注明属于军用等级或“增强型塑料”的 TI 组件才是设计或专门用于军事/航空应用或环境的。购买者认可并同 意, 对并非指定面向军事或航空航天用途的 TI 组件进行军事或航空航天方面的应用, 其风险由客户单独承担, 并且由客户独 力负责满足与此类使用相关的所有法律和法规要求。

TI 已明确指定符合 ISO/TS16949 要求的产品, 这些产品主要用于汽车。在任何情况下, 因使用非指定产品而无法达到 ISO/TS16949 要求, TI 不承担任何责任。

|               | 产品                                                                                         |              | 应用                                                                           |
|---------------|--------------------------------------------------------------------------------------------|--------------|------------------------------------------------------------------------------|
| 数字音频          | <a href="http://www.ti.com.cn/audio">www.ti.com.cn/audio</a>                               | 通信与电信        | <a href="http://www.ti.com.cn/telecom">www.ti.com.cn/telecom</a>             |
| 放大器和线性器件      | <a href="http://www.ti.com.cn/amplifiers">www.ti.com.cn/amplifiers</a>                     | 计算机及周边       | <a href="http://www.ti.com.cn/computer">www.ti.com.cn/computer</a>           |
| 数据转换器         | <a href="http://www.ti.com.cn/dataconverters">www.ti.com.cn/dataconverters</a>             | 消费电子         | <a href="http://www.ti.com.cn/consumer-apps">www.ti.com.cn/consumer-apps</a> |
| DLP® 产品       | <a href="http://www.dlp.com">www.dlp.com</a>                                               | 能源           | <a href="http://www.ti.com.cn/energy">www.ti.com.cn/energy</a>               |
| DSP - 数字信号处理器 | <a href="http://www.ti.com.cn/dsp">www.ti.com.cn/dsp</a>                                   | 工业应用         | <a href="http://www.ti.com.cn/industrial">www.ti.com.cn/industrial</a>       |
| 时钟和计时器        | <a href="http://www.ti.com.cn/clockandtimers">www.ti.com.cn/clockandtimers</a>             | 医疗电子         | <a href="http://www.ti.com.cn/medical">www.ti.com.cn/medical</a>             |
| 接口            | <a href="http://www.ti.com.cn/interface">www.ti.com.cn/interface</a>                       | 安防应用         | <a href="http://www.ti.com.cn/security">www.ti.com.cn/security</a>           |
| 逻辑            | <a href="http://www.ti.com.cn/logic">www.ti.com.cn/logic</a>                               | 汽车电子         | <a href="http://www.ti.com.cn/automotive">www.ti.com.cn/automotive</a>       |
| 电源管理          | <a href="http://www.ti.com.cn/power">www.ti.com.cn/power</a>                               | 视频和影像        | <a href="http://www.ti.com.cn/video">www.ti.com.cn/video</a>                 |
| 微控制器 (MCU)    | <a href="http://www.ti.com.cn/microcontrollers">www.ti.com.cn/microcontrollers</a>         |              |                                                                              |
| RFID 系统       | <a href="http://www.ti.com.cn/rfidsys">www.ti.com.cn/rfidsys</a>                           |              |                                                                              |
| OMAP应用处理器     | <a href="http://www.ti.com.cn/omap">www.ti.com.cn/omap</a>                                 |              |                                                                              |
| 无线连通性         | <a href="http://www.ti.com.cn/wirelessconnectivity">www.ti.com.cn/wirelessconnectivity</a> | 德州仪器在线技术支持社区 | <a href="http://www.deyisupport.com">www.deyisupport.com</a>                 |

邮寄地址: 上海市浦东新区世纪大道1568号, 中建大厦32楼邮政编码: 200122  
Copyright © 2016, 德州仪器半导体技术(上海)有限公司

## PACKAGING INFORMATION

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)            | Lead/Ball Finish<br>(6)    | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|----------------------------|----------------------------|----------------------|--------------|-------------------------|-------------------------|
| OPA2188AID       | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU                  | Level-2-260C-1 YEAR  | -40 to 105   | (2188 ~ OPA2188)        | <a href="#">Samples</a> |
| OPA2188AIDGKR    | ACTIVE        | VSSOP        | DGK                | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU  <br>CU NIPDAUAG | Level-2-260C-1 YEAR  | -40 to 105   | 2188                    | <a href="#">Samples</a> |
| OPA2188AIDGKT    | ACTIVE        | VSSOP        | DGK                | 8    | 250            | Green (RoHS<br>& no Sb/Br) | CU NIPDAU  <br>CU NIPDAUAG | Level-2-260C-1 YEAR  | -40 to 105   | 2188                    | <a href="#">Samples</a> |
| OPA2188AIDR      | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU                  | Level-2-260C-1 YEAR  | -40 to 105   | (2188 ~ OPA2188)        | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBsolete:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

---

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

| Device        | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|---------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| OPA2188AIDGKR | VSSOP        | DGK             | 8    | 2500 | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| OPA2188AIDGKR | VSSOP        | DGK             | 8    | 2500 | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| OPA2188AIDGKT | VSSOP        | DGK             | 8    | 250  | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| OPA2188AIDR   | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device        | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|---------------|--------------|-----------------|------|------|-------------|------------|-------------|
| OPA2188AIDGKR | VSSOP        | DGK             | 8    | 2500 | 366.0       | 364.0      | 50.0        |
| OPA2188AIDGKR | VSSOP        | DGK             | 8    | 2500 | 346.0       | 346.0      | 41.0        |
| OPA2188AIDGKT | VSSOP        | DGK             | 8    | 250  | 366.0       | 364.0      | 50.0        |
| OPA2188AIDR   | SOIC         | D               | 8    | 2500 | 367.0       | 367.0      | 35.0        |



## PACKAGE OUTLINE

**SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT



1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.

**D0008A**

**SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT



LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:8X



## SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



SOLDER PASTE EXAMPLE  
BASED ON .005 INCH [0.125 MM] THICK STENCIL  
SCALE:8X

4214825/C 02/2019

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

## DGK (S-PDSO-G8)

## PLASTIC SMALL-OUTLINE PACKAGE




## NOTES:

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 per end.
- D. Body width does not include interlead flash. Interlead flash shall not exceed 0.50 per side.
- E. Falls within JEDEC MO-187 variation AA, except interlead flash.

DGK (S-PDSO-G8)

PLASTIC SMALL OUTLINE PACKAGE

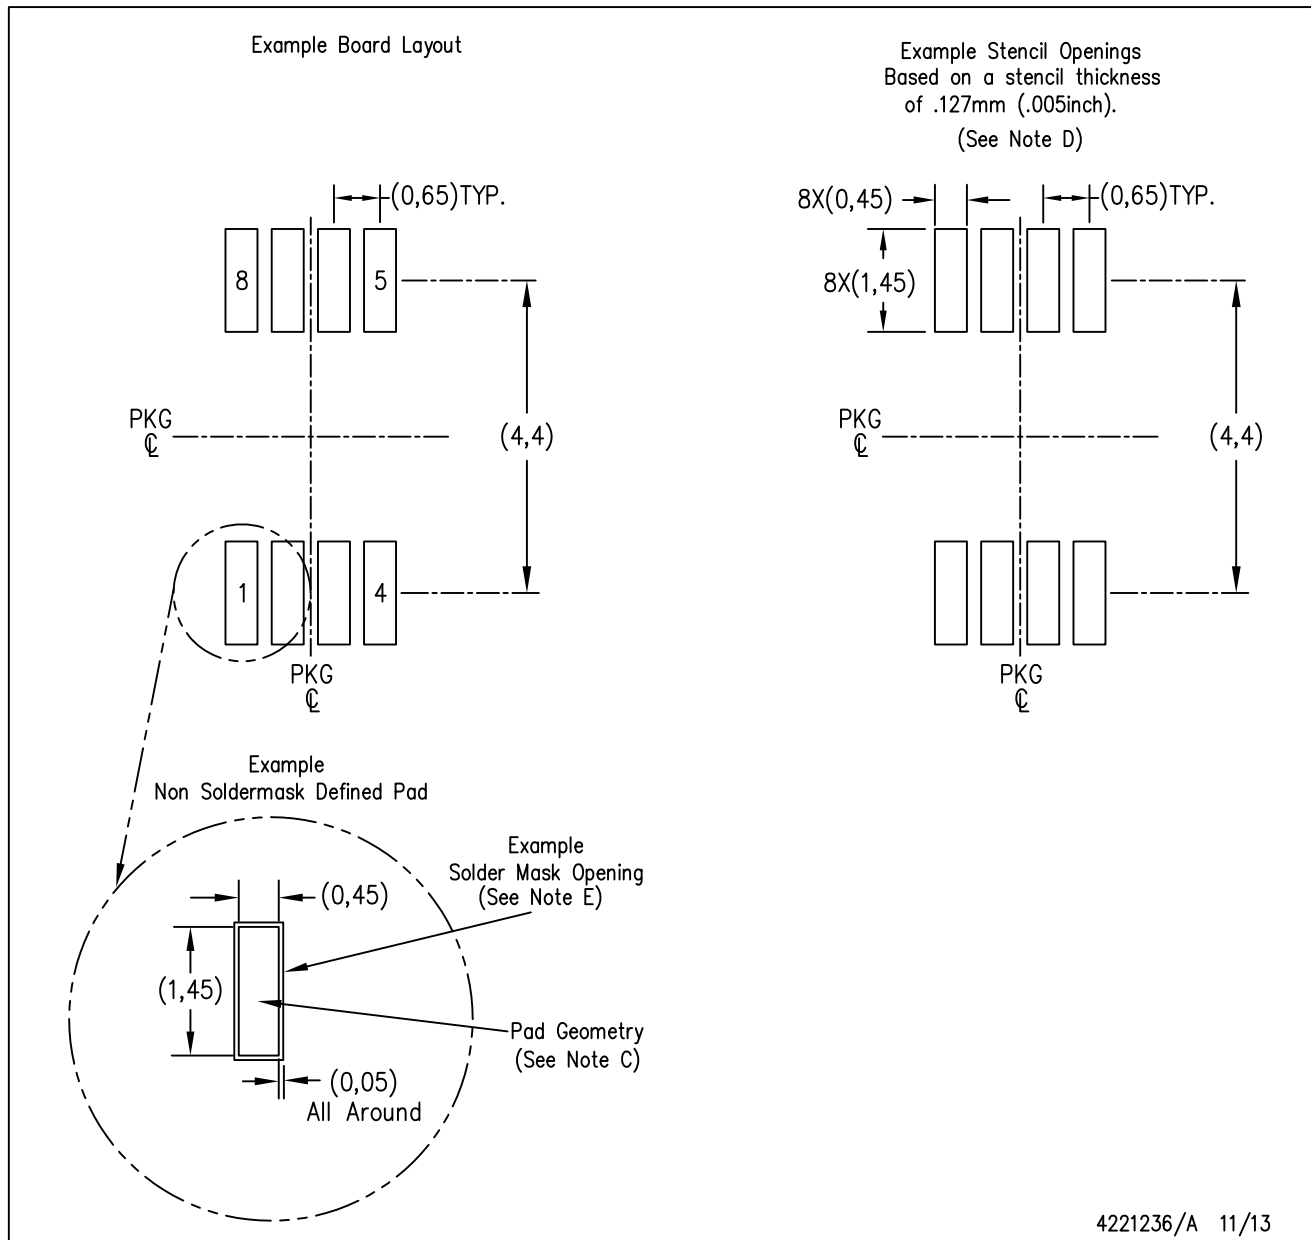

- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Publication IPC-7351 is recommended for alternate designs.
  - Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

## 重要声明和免责声明

TI 均以“原样”提供技术性 & 可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证其中不含任何瑕疵，且不做任何明示或暗示的担保，包括但不限于对适销性、适合某特定用途或不侵犯任何第三方知识产权的暗示担保。

所述资源可供专业开发人员应用 TI 产品进行设计使用。您将对以下行为独自承担全部责任：(1) 针对您的应用选择合适的 TI 产品；(2) 设计、验证并测试您的应用；(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。所述资源如有变更，恕不另行通知。TI 对您使用所述资源的授权仅限于开发资源所涉及 TI 产品的相关应用。除此之外不得复制或展示所述资源，也不提供其它 TI 或任何第三方的知识产权授权许可。如因使用所述资源而产生任何索赔、赔偿、成本、损失及债务等，TI 对此概不负责，并且您须赔偿由此对 TI 及其代表造成的损害。

TI 所提供产品均受 TI 的销售条款 (<http://www.ti.com.cn/zh-cn/legal/termsofsale.html>) 以及 [ti.com.cn](http://www.ti.com.cn) 上或随附 TI 产品提供的其他可适用条款的约束。TI 提供所述资源并不扩展或以其他方式更改 TI 针对 TI 产品所发布的可适用的担保范围或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122  
Copyright © 2019 德州仪器半导体技术（上海）有限公司