


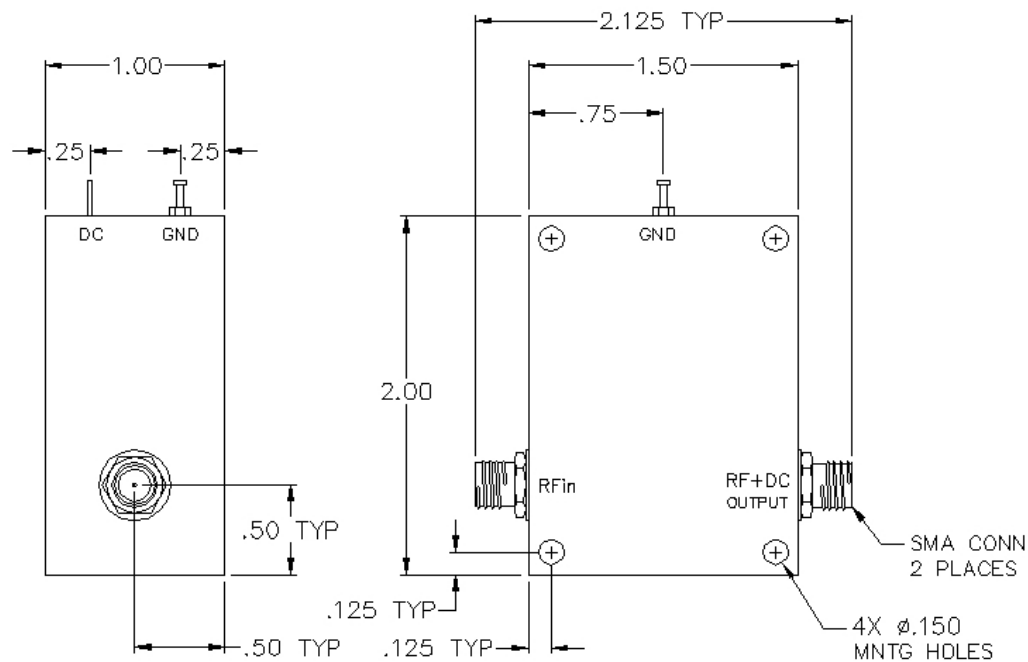

SPECIFICATIONS

Frequency Range: 10 - 6000 MHz
 Isolation: 25 dB Min
 Insertion Loss: 1.8 dB Max
 Current[†]: 4000 mA Max
 Power: 10 Watts Max
 Voltage: 100 Vdc Max
 VSWR: 1.50:1 Max

Notes:

- Higher current and isolation requirements available.

PULSAR MICROWAVE CORPORATION

PULSAR MICROWAVE CORPORATION
 48 INDUSTRIAL WEST, CLIFTON NJ 07012
 TEL: 973-779-6262 FAX: 973-779-2727
 WWW.PULSARMICROWAVE.COM

DESCRIPTION :

Bias Tee

MODEL NO. :

BT-40-402D

DIMENSIONS ARE IN INCHES
 DECIMAL TOLERANCE:
 2 PLACE $\pm .02$
 3 PLACE $\pm .010$

SIZE
 A

CAGE CODE :
 0HR85

REV CODE :
 171024

SCALE : N / A

ALL SPECIFICATIONS ARE SUBJECT TO
 CHANGE WITHOUT NOTICE AT ANY TIME

SHEET 1 OF 1