LOW-NOISE, HIGH-VOLTAGE, CURRENT-FEEDBACK OPERATIONAL AMPLIFIERS

Check for Samples: THS3110 THS3111

FEATURES

- **Low Noise**
  - **2-pA/√Hz Noninverting Current Noise**
  - **10-pA/√Hz Inverting Current Noise**
  - **3-nV/√Hz Voltage Noise**
- **High Output Current Drive: 260 mA**
- **High Slew Rate: 1300 V/µs**
  - **(R_L = 100 Ω, V_O = 8 V_{PP})**
- **Wide Bandwidth: 90 MHz (G = 2, R_L = 100 Ω)**
- **Wide Supply Range: ±5 V to ±15 V**
- **Power-Down Feature: (THS3110 Only)**

APPLICATIONS

- **Video Distribution**
- **Power FET Driver**
- **Pin Driver**
- **Capacitive Load Driver**

DESCRIPTION


The THS3110 and THS3111 are low-noise, high-voltage, current-feedback amplifiers designed to operate over a wide supply range of ±5 V to ±15 V for today's high performance applications.

The THS3110 features a power-down pin (PD) that puts the amplifier in low-power standby mode, and lowers the quiescent current from 4.8 mA to 270 µA.


These amplifiers provide well-regulated ac performance characteristics. The unity-gain bandwidth of 100 MHz allows for good distortion characteristics below 10 MHz. Coupled with a high 1300-V/µs slew rate, the THS3110 and THS3111 amplifiers allow for high output voltage swings at high frequencies.

The THS3110 and THS3111 are offered in the SOIC-8 (D) and the MSOP-8 (DGN) packages with PowerPAD™.


DIFFERENTIAL GAIN vs NUMBER OF LOADS

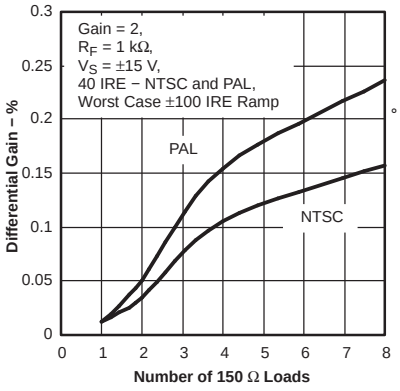

DIFFERENTIAL PHASE vs NUMBER OF LOADS

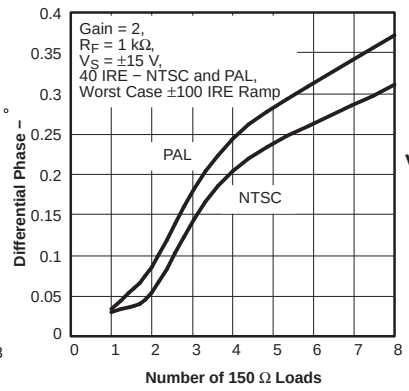

VIDEO DISTRIBUTION AMPLIFIER APPLICATION

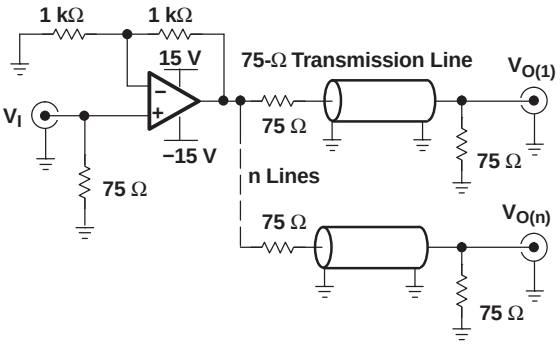

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PowerPAD is a trademark of Texas Instruments.
All other trademarks are the property of their respective owners.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.


Copyright © 2003–2009, Texas Instruments Incorporated

This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

TOP VIEW **D, DGN**


THS3110



NC = No Internal Connection

TOP VIEW **D, DGN**

THS3111



NC = No Internal Connection

NOTE: The device with the power-down option defaults to the ON state if no signal is applied to the PD pin. Additionally, the REF pin functional range is from V_{S-} to (V_{S+} – 4 V).

AVAILABLE OPTIONS(1)

T_A	PACKAGED DEVICE		
	PLASTIC SMALL OUTLINE SOIC (D)	PLASTIC MSOP (DGN) (2)	SYMBOL
0°C to +70°C	THS3110CD	THS3110CDGN	BJB
	THS3110CDR	THS3110CDGNR	
–40°C to +85°C	THS3110ID	THS3110IDGN	BIR
	THS3110IDR	THS3110IDGNR	
0°C to +70°C	THS3111CD	THS3111CDGN	BJA
	THS3111CDR	THS3111CDGNR	
–40°C to +85°C	THS3111ID	THS3111IDGN	BIS
	THS3111IDR	THS3111IDGNR	

(1) For the most current package and ordering information see the Package Option Addendum at the end of this document, or see the TI web site at www.ti.com.
(2) The PowerPAD is electrically isolated from all other pins.

DISSIPATION RATINGS TABLE

PACKAGE	θ_{JC} (°C/W)	θ_{JA} (°C/W)	POWER RATING T_J = +125°C	
			T_A = +25°C	T_A = +85°C
D-8 (1)	38.3	95	1.05 W	421 mW
DGN-8 (2)	4.7	58.4	1.71 W	685 mW

(1) These data were taken using the JEDEC standard low-K test PCB. For the JEDEC proposed high-K test PCB, the θ_{JA} is 95°C/W with power rating at T_A = +25°C of 1.05 W.
(2) These data were taken using 2 oz. trace and copper pad that is soldered directly to a 3 inch × 3 inch (76,2 mm × 76,2 mm) PCB. For further information, refer to the *Application Information* section of this data sheet.

Copyright © 2003–2009, Texas Instruments Incorporated

RECOMMENDED OPERATING CONDITIONS

		MIN	NOM	MAX	UNIT
Supply voltage	Dual supply	±5		±15	V
	Single supply	10		30	
Operating free-air temperature, T_A	Commercial	0		+70	°C
	Industrial	–40		+85	
Operating junction temperature, continuous operating temperature, T_J		–40		+125	
Normal storage temperature, T_{STG}		–40		+85	

ABSOLUTE MAXIMUM RATINGS(1)

Over operating free-air temperature, unless otherwise noted.

		UNIT
Supply voltage, $V_{S–}$ to V_{S+}		33 V
Input voltage, V_I		± V_S
Differential input voltage, V_{ID}		± 4 V
Output current, I_O (2)		300 mA
Continuous power dissipation		See Dissipation Ratings Table
Maximum junction temperature, T_J (3)		+150°C
Maximum junction temperature, continuous operation, long term reliability, T_J (4)		+125°C
Operating free-air temperature, T_A	Commercial	0°C to +70°C
	Industrial	–40°C to +85°C
Storage temperature, T_{stg}		–65°C to +125°C
ESD ratings:		
HBM		900
CDM		1500
MM		200

(1) Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
(2) The THS3110 and THS3111 may incorporate a PowerPAD on the underside of the chip. This feature acts as a heatsink and must be connected to a thermally dissipating plane for proper power dissipation. Failure to do so may result in exceeding the maximum junction temperature which could permanently damage the device. See TI Technical Brief SLMA002 for more information about utilizing the PowerPAD™ thermally-enhanced package.
(3) The absolute maximum temperature under any condition is limited by the constraints of the silicon process.
(4) The maximum junction temperature for continuous operation is limited by package constraints. Operation above this temperature may result in reduced reliability and/or lifetime of the device.

Copyright © 2003–2009, Texas Instruments Incorporated

ELECTRICAL CHARACTERISTICS

V_S = ±15 V, R_F = 1 k Ω,R_L = 100 Ω, and G = 2, unless otherwise noted.

PARAMETER	TEST CONDITIONS		TYP	OVER TEMPERATURE			UNIT	MIN/TYP/MAX
			+25°C	+25°C	0°C to +70°C	–40°C to +85°C		
AC PERFORMANCE								
Small-signal bandwidth, –3 dB	G = 1, R_F = 1.5 kΩ, V_O = 200 mV_{PP}		100				MHz	TYP
	G = 2, R_F = 1 kΩ, V_O = 200 mV_{PP}		90					
	G = 5, R_F = 806 Ω, V_O = 200 mV_{PP}		87					
	G = 10, R_F = 604 Ω, V_O = 200 mV_{PP}		66					
0.1-dB bandwidth flatness	G = 2, R_F = 1.15 kΩ, V_O = 200 mV_{PP}		45					
Large-signal bandwidth	G = 5, R_F = 806 Ω , V_O = 4 V_{PP}		95					
Slew rate (25% to 75% level)	G = 1, V_O = 4-V step, R_F = 1.5 kΩ		800				V/µs	TYP
	G = 2, V_O = 8-V step, R_F = 1 kΩ		1300					
Slew rate	Recommended maximum SR for repetitive signals(1)		900				V/µs	MAX
Rise and fall time	G = –5, V_O = 10-V step, R_F = 806 Ω		8				ns	TYP
Settling time to 0.1%	G = –2, V_O = 2 V_{PP} step		27				ns	TYP
Settling time to 0.01%	G = –2, V_O = 2 V_{PP} step		250					
Harmonic distortion								
2nd harmonic distortion	G = 2, R_F = 1 kΩ, V_O = 2 V_{PP}, f = 10 MHz	R_L = 100 Ω	52				dBc	TYP
		R_L = 1 kΩ	53					
3rd harmonic distortion		R_L = 100 Ω	48					
		R_L = 1 kΩ	68					
Input voltage noise	f > 20 kHz		3				nV/√Hz	TYP
Noninverting input current noise	f > 20 kHz		2				pA/√Hz	TYP
Inverting input current noise	f > 20 kHz		10				pA/√Hz	TYP
Differential gain	G = 2, R_L = 150 Ω, R_F = 1 kΩ	NTSC	0.011%					TYP
		PAL	0.013%					
Differential phase		NTSC	0.029°					
		PAL	0.033°					
DC PERFORMANCE								
Transimpedance	V_O = ±3.75 V, gain = 1		1	0.75	0.5	0.5	MΩ	MIN
Input offset voltage	V_{CM} = 0 V		3	10	12	12	mV	MAX
Average offset voltage drift					±10	±10	µV/°C	TYP
Noninverting input bias current	V_{CM} = 0 V		1	4	6	6	µA	MAX
Average bias current drift					±10	±10	nA/°C	TYP
Inverting input bias current	V_{CM} = 0 V		1.5	15	20	20	µA	MAX
Average bias current drift					±10	±10	nA/°C	TYP
Input offset current	V_{CM} = 0 V		2.5	15	20	20	µA	MAX
Average offset current drift					±30	±30	nA/°C	TYP
INPUT CHARACTERISTICS								
Input common-mode voltage range			±13.3	±13	±12.5	±12.5	V	MIN
Common-mode rejection ratio	V_{CM} = ±12.5 V		68	62	60	60	dB	MIN
Noninverting input resistance			41				MΩ	TYP
Noninverting input capacitance			0.4				pF	TYP
OUTPUT CHARACTERISTICS								
Output voltage swing	R_L = 1 kΩ		±13.5	±13	±12.5	±12.5	V	MIN
	R_L = 100 Ω		±13.4	±12.5	±12	±12		
Output current (sourcing)	R_L = 25 Ω		260	200	175	175	mA	MIN
Output current (sinking)	R_L = 25 Ω		260	200	175	175	mA	MIN
Output impedance	f = 1 MHz, closed loop		0.15				Ω	TYP

(1) For more information, see the *Application Information* section of this data sheet.

Copyright © 2003–2009, Texas Instruments Incorporated

ELECTRICAL CHARACTERISTICS (continued)

V_S = ±15 V, R_F = 1 k Ω,R_L = 100 Ω, and G = 2, unless otherwise noted.

PARAMETER	TEST CONDITIONS	TYP	OVER TEMPERATURE			UNIT	MIN/TYP/MAX
		+25°C	+25°C	0°C to +70°C	–40°C to +85°C		
POWER SUPPLY							
Specified operating voltage		±15	±16	±16	±16	V	MAX
Maximum quiescent current		4.8	6.5	7.5	7.5	mA	MAX
Minimum quiescent current		4.8	3.8	2.5	2.5	mA	MIN
Power-supply rejection (+PSRR)	V_{S+} = 15.5 V to 14.5 V, $V_{S–}$ = 15 V	75	65	60	60	dB	MIN
Power-supply rejection (–PSRR)	V_{S+} = 15 V, $V_{S–}$ = –15.5 V to –14.5 V	69	60	55	55	dB	MIN
POWER-DOWN CHARACTERISTICS (THS3110 Only)							
REF voltage range (2)		V_{S+} – 4				V	MAX
		$V_{S–}$				V	MIN
Power-down voltage level(2)	Enable	PD ≤ REF+ 0.8				V	MIN
	Disable	PD ≥ REF + 2				V	MAX
Power-down quiescent current	PD ≥ REF + 2 V	270	450	500	500	µA	MAX
PD pin bias current	V_{PD} = 0 V, REF = 0 V,	11				µA	TYP
	V_{PD} = 3.3 V, REF = 0 V	11					
Turn-on time delay	90% of final value	4				µs	TYP
Turn-off time delay	10% of final value	6					
Input impedance		3.4 || 1.7				kΩ || pF	TYP

(2) For detailed information on the behavior of the power-down circuit, see the *Saving Power with Power-Down Functionality* and *Power-Down Reference Pin Operation* sections in the *Application Information* section of this data sheet.

Copyright © 2003–2009, Texas Instruments Incorporated

ELECTRICAL CHARACTERISTICS

V_S = ±5 V, R_F = 1.15 Ω, R_L = 100 Ω, and G = 2, unless otherwise noted.

PARAMETER	TEST CONDITIONS		TYP	OVER TEMPERATURE			UNIT	MIN/TYP/MAX
			+25°C	+25°C	0°C to +70°C	–40°C to +85°C		
AC PERFORMANCE								
Small-signal bandwidth, –3 dB	G = 1, R_F = 1.5 kΩ, V_O = 200 mV_{PP}		85				MHz	TYP
	G = 2, R_F = 1.15 kΩ, V_O = 200 mV_{PP}		78					
	G = 5, R_F = 806 Ω, V_O = 200 mV_{PP}		80					
	G = 10, R_F = 604 Ω, V_O = 200 mV_{PP}		60					
0.1-dB bandwidth flatness	G = 2, R_F = 1.15 kΩ, V_O = 200 mV_{PP}		15					
Large-signal bandwidth	G = 5, R_F = 806 Ω, V_O = 4 V_{PP}		80					
Slew rate (25% to 75% level)	G = 1, V_O = 4-V step, R_F = 1.5 kΩ		640				V/µs	TYP
	G = 2, V_O = 4-V step, R_F = 1 kΩ		700					
Slew rate	Recommended maximum SR for repetitive signals(1)		900				V/µs	MAX
Rise and fall time	G = –5, V_O = 5-V step, R_F = 806 Ω		7				ns	TYP
Settling time to 0.1%	G = –2, V_O = 2 V_{PP} step		20				ns	TYP
Settling time to 0.01%	G = –2, V_O = 2 V_{PP} step		200					
Harmonic distortion								
2nd harmonic distortion	G = 2, R_F = 1 kΩ, V_O = 2 V_{PP}, f = 10 MHz	R_L = 100 Ω	55				dBc	TYP
		R_L = 1 kΩ	56					
3rd harmonic distortion		R_L = 100 Ω	45					
		R_L = 1 kΩ	62					
Input voltage noise	f > 20 kHz		3				nV/√Hz	TYP
Noninverting input current noise	f > 20 kHz		2				pA/√Hz	TYP
Inverting input current noise	f > 20 kHz		10				pA/√Hz	TYP
Differential gain	G = 2, R_L = 150 Ω, R_F = 1 kΩ	NTSC	0.011%					TYP
		PAL	0.015%					
Differential phase		NTSC	0.020°					
		PAL	0.033°					
DC PERFORMANCE								
Transimpedance	V_O = ±1.25 V, gain = 1		1	0.75	0.5	0.5	MΩ	MIN
Input offset voltage	V_{CM} = 0 V		6	10	12	12	mV	MAX
Average offset voltage drift					±10	±10	µV/°C	TYP
Noninverting input bias current	V_{CM} = 0 V		1	4	6	6	µA	MAX
Average bias current drift					±10	±10	nA/°C	TYP
Inverting input bias current	V_{CM} = 0 V		1	8	10	10	µA	MAX
Average bias current drift					±10	±10	nA/°C	TYP
Input offset current	V_{CM} = 0 V		1	6	8	8	µA	MAX
Average offset current drift					±20	±20	nA/°C	TYP
INPUT CHARACTERISTICS								
Input common-mode voltage range			±3.2	±2.9	±2.8	±2.8	V	MIN
Common-mode rejection ratio	V_{CM} = ±2.5 V		65	62	58	58	dB	MIN
Noninverting input resistance			35				MΩ	TYP
Noninverting input capacitance			0.5				pF	TYP
OUTPUT CHARACTERISTICS								
Output voltage swing	R_L = 1 kΩ		±4	±3.8	±3.6	±3.6	V	MIN
	R_L = 100 Ω		±3.8	±3.7	±3.5	±3.5		
Output current (sourcing)	R_L = 10 Ω		220	150	125	125	mA	MIN
Output current (sinking)	R_L = 10 Ω		220	150	125	125	mA	MIN
Output impedance	f = 1 MHz, closed loop		0.15				Ω	TYP

(1) For more information, see the *Application Information* section of this data sheet.

Copyright © 2003–2009, Texas Instruments Incorporated

ELECTRICAL CHARACTERISTICS (continued)

V_S = ±5 V, R_F = 1.15 Ω, R_L = 100 Ω, and G = 2, unless otherwise noted.

PARAMETER	TEST CONDITIONS	TYP	OVER TEMPERATURE			UNIT	MIN/TYP/MAX
		+25°C	+25°C	0°C to +70°C	–40°C to +85°C		
POWER SUPPLY							
Specified operating voltage		±5	±4.5	±4.5	±4.5	V	MIN
Maximum quiescent current		4	6	7	7	mA	MAX
Minimum quiescent current		4	3.2	2	2	mA	MIN
Power-supply rejection (+PSRR)	V_{S+} = 5.5 V to 4.5 V, $V_{S–}$ = 5 V	71	62	57	57	dB	MIN
Power-supply rejection (–PSRR)	V_{S+} = 5 V, $V_{S–}$ = –5.5 V to –4.5 V	66	57	52	52	dB	MIN
POWER-DOWN CHARACTERISTICS (THS3110 Only)							
REF voltage range(2)		V_{S+} –4				V	MAX
		$V_{S–}$				V	MIN
Power-down voltage level(2)	Enable	PD ≤ REF + 0.8				V	MIN
	Disable	PD ≥ REF + 2				V	MAX
Power-down quiescent current	PD ≥ REF + 2 V	200	450	500	500	µA	MAX
PD pin bias current	V_{PD} = 0 V, REF = 0 V,	11				µA	TYP
	V_{PD} = 3.3 V, REF = 0 V	11					
Turn-on time delay	90% of final value	4				µs	TYP
Turn-off time delay	10% of final value	6					
Input impedance		3.4 || 1.7				kΩ || pF	TYP

(2) For detailed information on the behavior of the power-down circuit, see the *Power-Down* and *Power-down Reference* sections in the *Application Information* section of this data sheet.

Copyright © 2003–2009, Texas Instruments Incorporated

TYPICAL CHARACTERISTICS

TABLE OF GRAPHS

		FIGURE
±15-V Graphs		
Noninverting small-signal gain frequency response		1, 2
Inverting small-signal gain frequency response		3
0.1-dB flatness		4
Noninverting large-signal gain frequency response		5
Inverting large-signal gain frequency response		6
Frequency response capacitive load		7
Recommended R_{ISO}	vs Capacitive load	8
2nd harmonic distortion	vs Frequency	9
3rd harmonic distortion	vs Frequency	10
Harmonic distortion	vs Output voltage swing	11, 12
Slew rate	vs Output voltage step	13, 14, 15, 16
Noise	vs Frequency	17
Settling time		18, 19
Quiescent current	vs Supply voltage	20
Output voltage	vs Load resistance	21
Input bias and offset current	vs Case temperature	22
Input offset voltage	vs Case temperature	23
Transimpedance	vs Frequency	24
Rejection ratio	vs Frequency	25
Noninverting small-signal transient response		26
Inverting large signal transient response		27
Overdrive recovery time		28
Differential gain	vs Number of loads	29
Differential phase	vs Number of loads	30
Closed loop output impedance	vs Frequency	31
Power-down quiescent current	vs Supply voltage	32
Turn-on and turn-off time delay		33
±5-V Graphs		
Noninverting small-signal gain frequency response		34
Inverting small-signal gain frequency response		35
0.1-dB flatness		36
Noninverting large-signal gain frequency response		37
Inverting large-signal gain frequency response		38
Slew rate	vs Output voltage step	39, 40, 41, 42
2nd harmonic distortion	vs Frequency	43
3rd harmonic distortion	vs Frequency	44
Harmonic distortion	vs Output voltage swing	45, 46
Noninverting small-signal transient response		47
Inverting small-signal transient response		48
Overdrive recovery time		49
Rejection ratio	vs Frequency	50

Copyright © 2003–2009, Texas Instruments Incorporated

TYPICAL CHARACTERISTICS (±15 V)

NONINVERTING SMALL-SIGNAL FREQUENCY RESPONSE

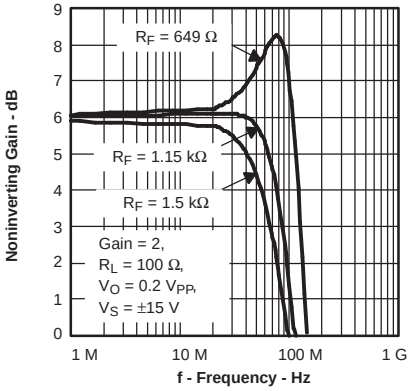


Figure 1.

NONINVERTING SMALL-SIGNAL FREQUENCY RESPONSE

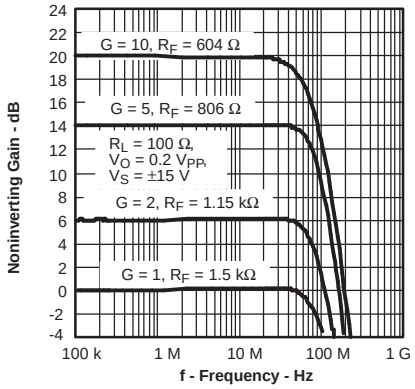


Figure 2.

INVERTING SMALL-SIGNAL FREQUENCY RESPONSE

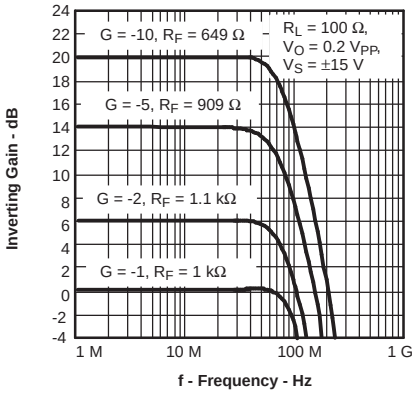


Figure 3.

0.1-dB FLATNESS

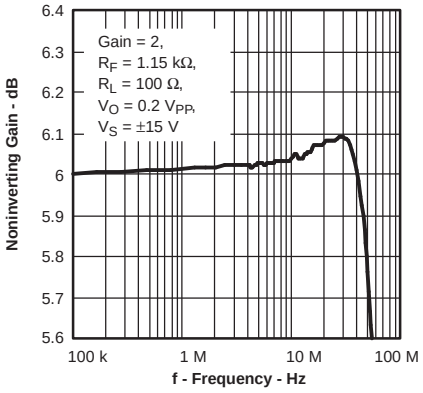


Figure 4.

NONINVERTING LARGE-SIGNAL FREQUENCY RESPONSE

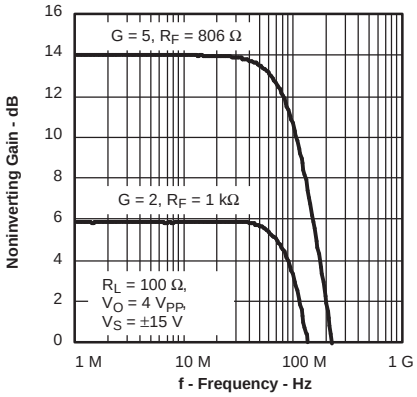


Figure 5.

INVERTING LARGE-SIGNAL FREQUENCY RESPONSE

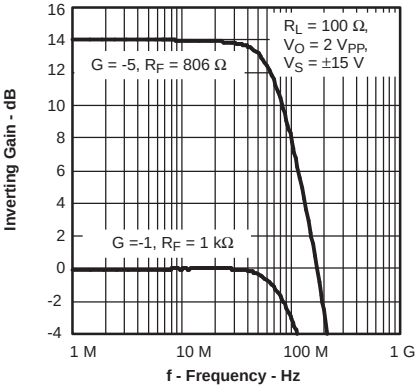


Figure 6.

FREQUENCY RESPONSE CAPACITIVE LOAD

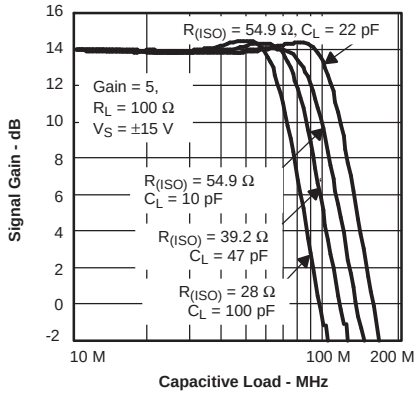


Figure 7.

RECOMMENDED R_{ISO} VS CAPACITIVE LOAD

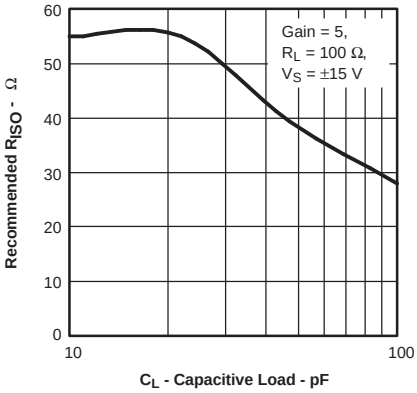


Figure 8.

2nd HARMONIC DISTORTION VS FREQUENCY

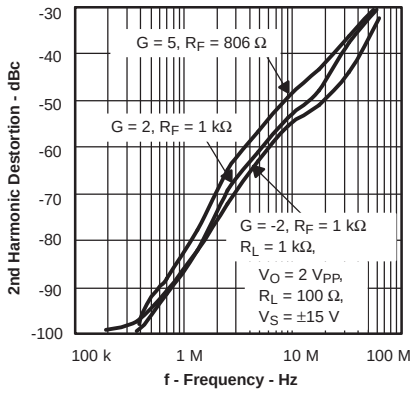


Figure 9.

Copyright © 2003–2009, Texas Instruments Incorporated

TYPICAL CHARACTERISTICS (±15 V) (continued)

3rd HARMONIC DISTORTION vs FREQUENCY

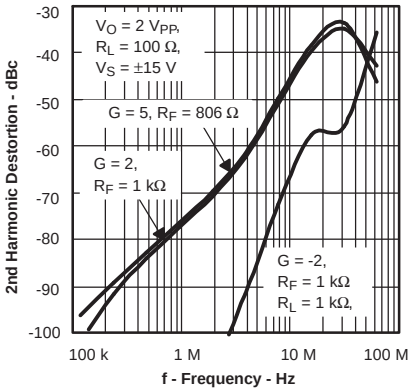


Figure 10.

HARMONIC DISTORTION vs OUTPUT VOLTAGE SWING

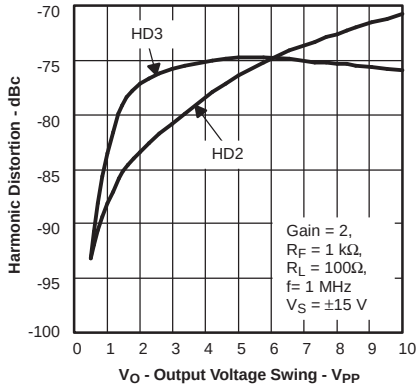


Figure 11.

HARMONIC DISTORTION vs OUTPUT VOLTAGE SWING

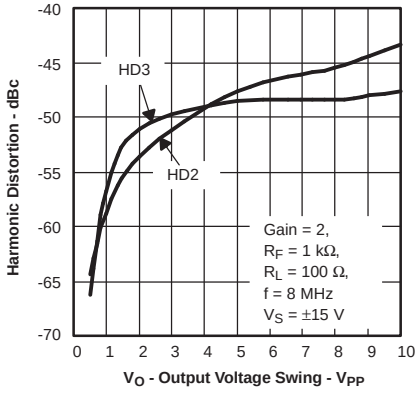


Figure 12.

SLEW RATE vs OUTPUT VOLTAGE STEP

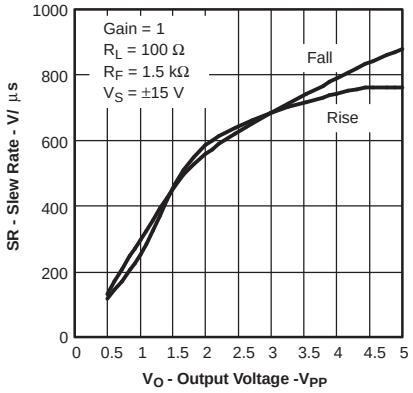


Figure 13.

SLEW RATE vs OUTPUT VOLTAGE STEP

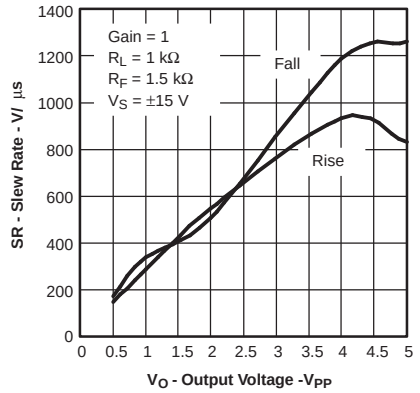


Figure 14.

SLEW RATE vs OUTPUT VOLTAGE STEP

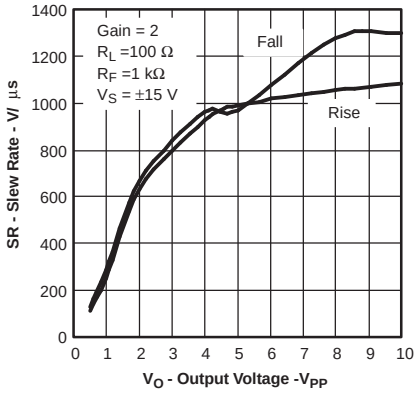


Figure 15.

SLEW RATE vs OUTPUT VOLTAGE STEP

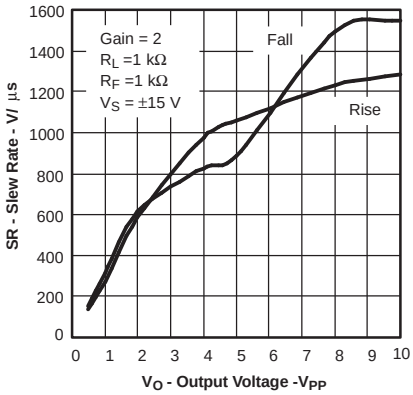


Figure 16.

NOISE vs FREQUENCY

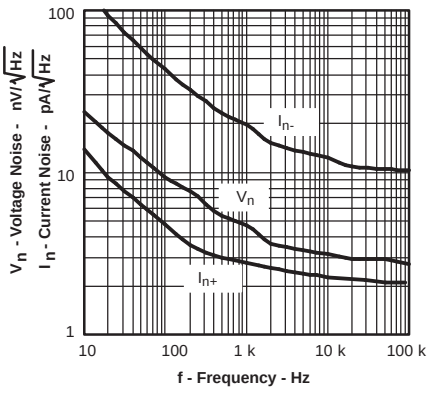


Figure 17.

SETTLING TIME

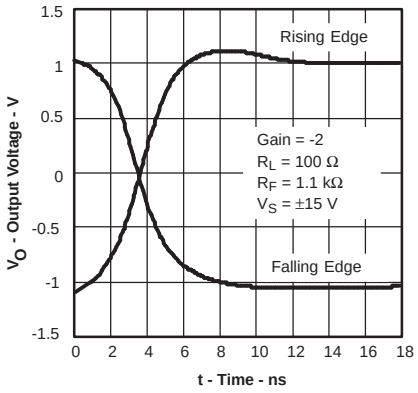


Figure 18.

Copyright © 2003–2009, Texas Instruments Incorporated

TYPICAL CHARACTERISTICS (±15 V) (continued)

SETTLING TIME

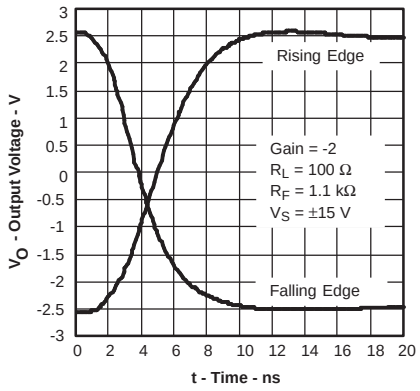


Figure 19.

QUIESCENT CURRENT vs SUPPLY VOLTAGE

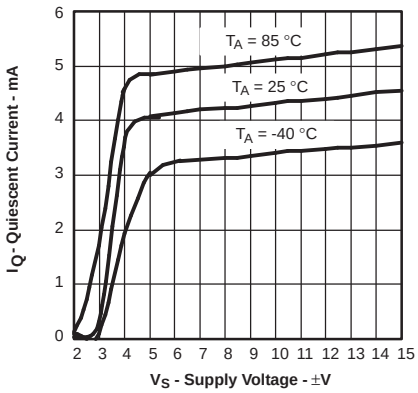


Figure 20.

OUTPUT VOLTAGE vs LOAD RESISTANCE

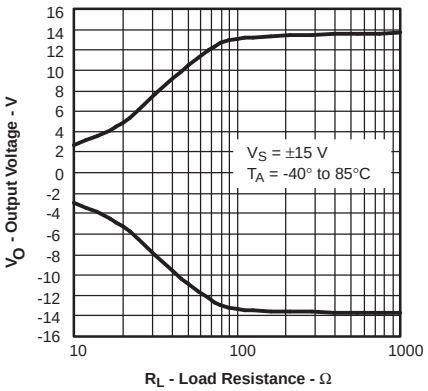


Figure 21.

INPUT BIAS AND OFFSET CURRENT vs CASE TEMPERATURE

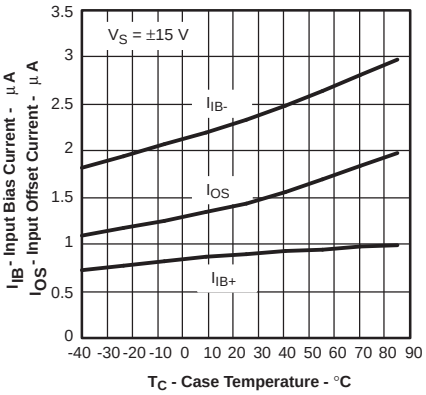


Figure 22.

INPUT OFFSET VOLTAGE vs CASE TEMPERATURE

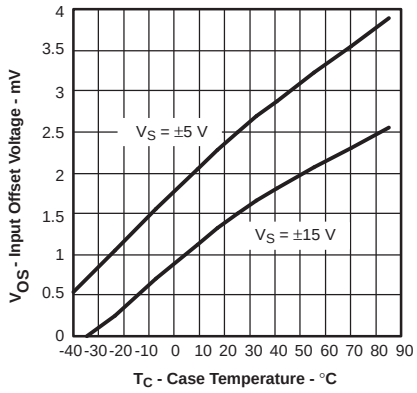


Figure 23.

TRANSIMPEDANCE vs FREQUENCY

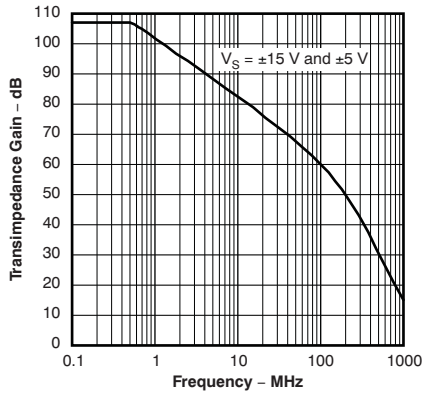


Figure 24.

Copyright © 2003–2009, Texas Instruments Incorporated

TYPICAL CHARACTERISTICS (±15 V) (continued)

REJECTION RATIO vs FREQUENCY

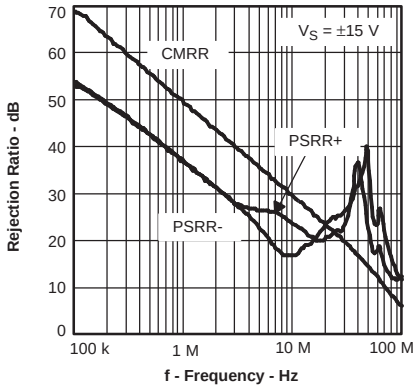


Figure 25.

NONINVERTING SMALL-SIGNAL TRANSIENT RESPONSE

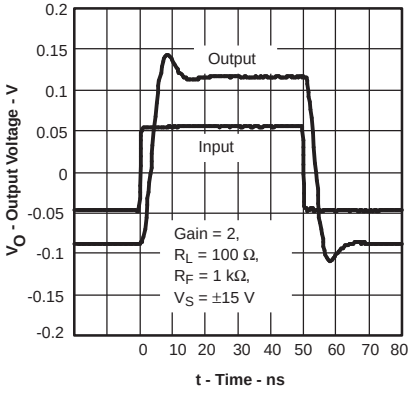


Figure 26.

INVERTING LARGE-SIGNAL TRANSIENT RESPONSE

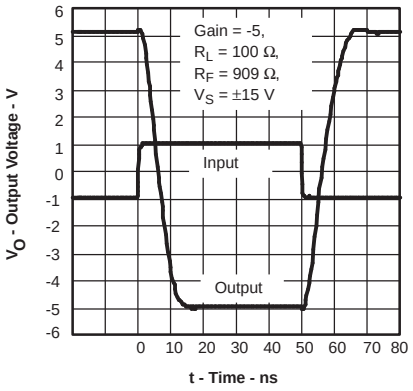


Figure 27.

OVERDRIVE RECOVERY TIME

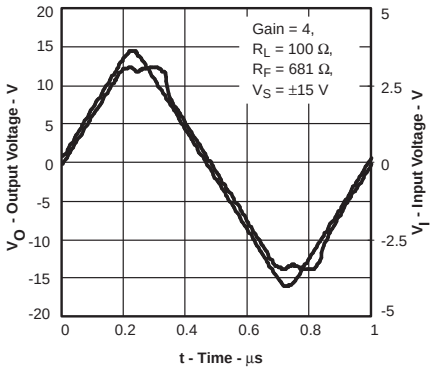


Figure 28.

DIFFERENTIAL GAIN vs NUMBER OF LOADS

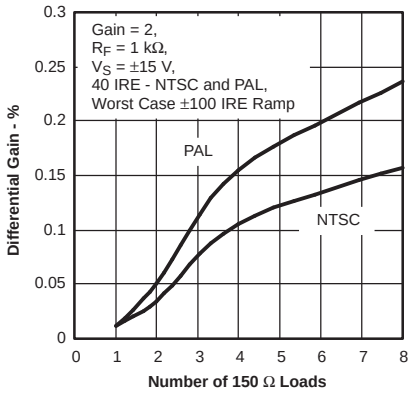


Figure 29.

DIFFERENTIAL PHASE vs NUMBER OF LOADS

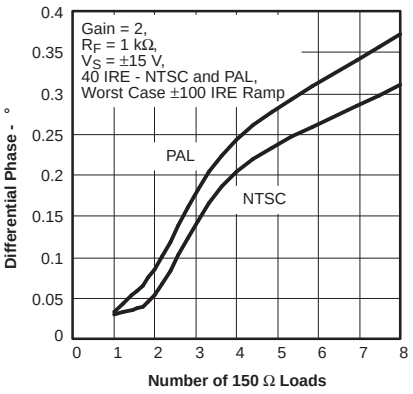


Figure 30.

Copyright © 2003–2009, Texas Instruments Incorporated

TYPICAL CHARACTERISTICS (±15 V) (continued)

CLOSED-LOOP OUTPUT IMPEDANCE vs FREQUENCY

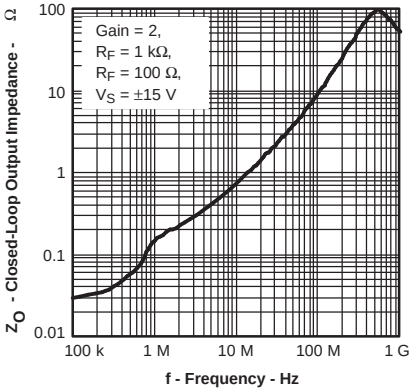


Figure 31.

POWER-DOWN QUIESCENT CURRENT vs SUPPLY VOLTAGE

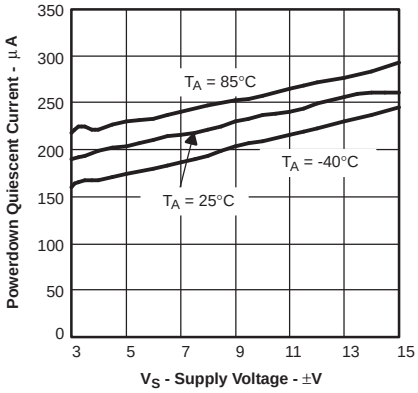


Figure 32.

TURN-ON AND TURN-OFF TIME DELAY

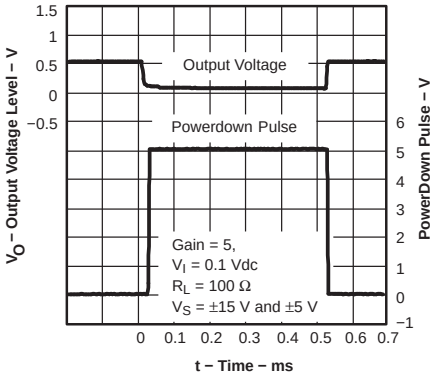


Figure 33.

TYPICAL CHARACTERISTICS (±5 V)

NONINVERTING SMALL-SIGNAL FREQUENCY RESPONSE

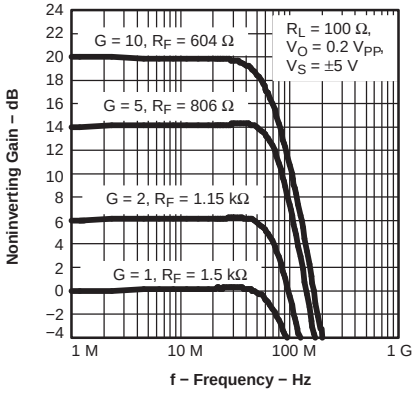


Figure 34.

INVERTING SMALL-SIGNAL FREQUENCY RESPONSE

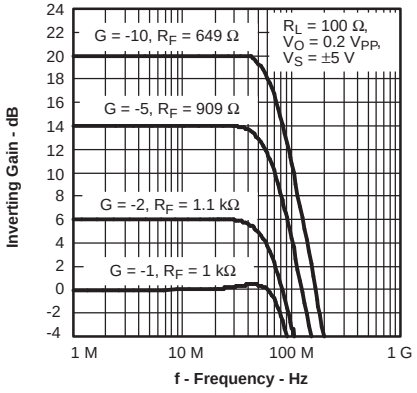


Figure 35.

0.1-dB FLATNESS

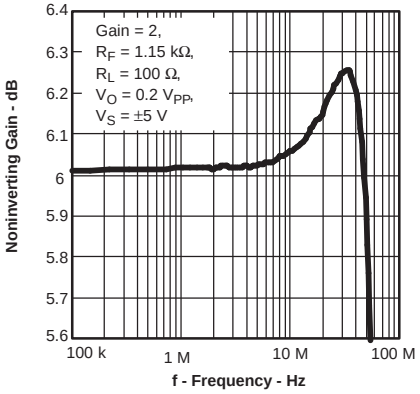


Figure 36.

NONINVERTING LARGE-SIGNAL FREQUENCY RESPONSE

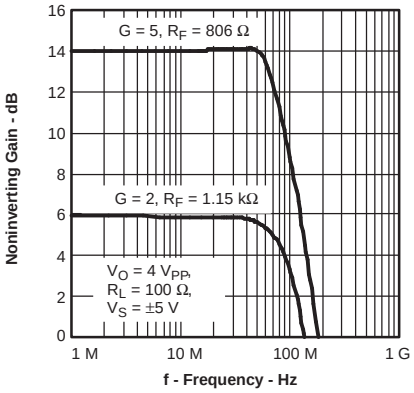


Figure 37.

INVERTING LARGE-SIGNAL FREQUENCY RESPONSE

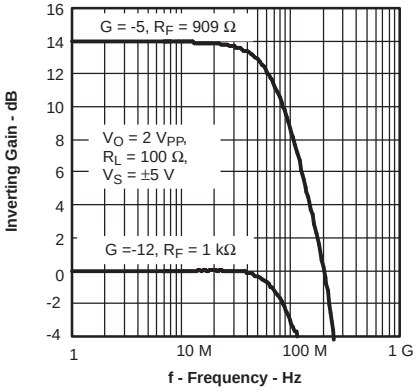


Figure 38.

SLEW RATE vs OUTPUT VOLTAGE STEP

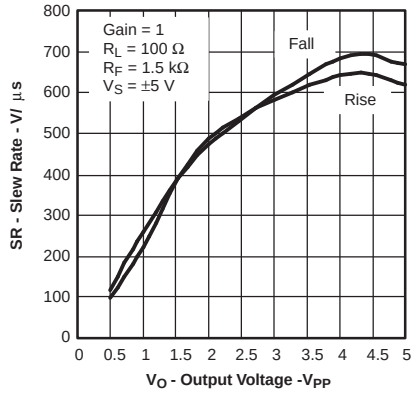


Figure 39.

SLEW RATE vs OUTPUT VOLTAGE STEP

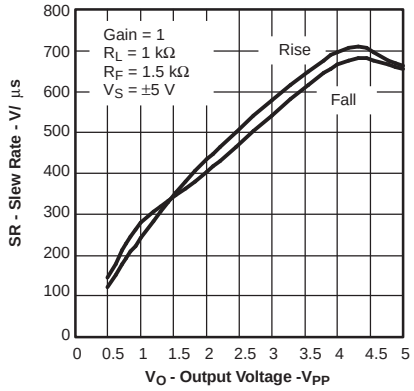


Figure 40.

SLEW RATE vs OUTPUT VOLTAGE STEP

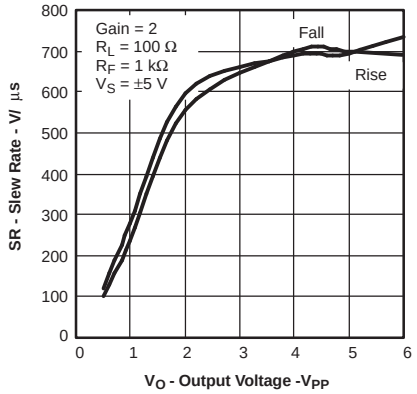


Figure 41.

SLEW RATE vs OUTPUT VOLTAGE STEP

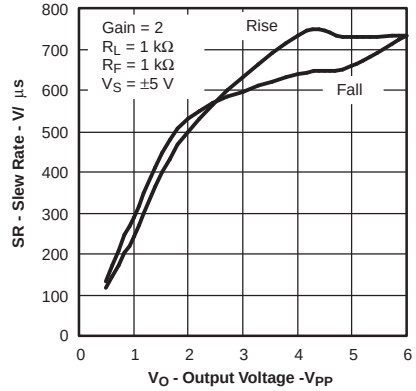


Figure 42.

Copyright © 2003–2009, Texas Instruments Incorporated

TYPICAL CHARACTERISTICS (±5 V) (continued)

2nd HARMONIC DISTORTION vs FREQUENCY

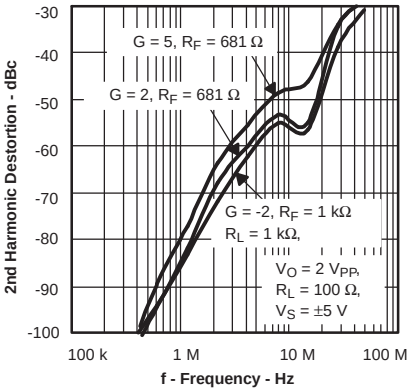


Figure 43.

3rd HARMONIC DISTORTION vs FREQUENCY

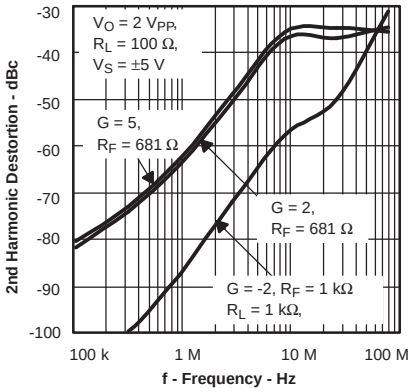


Figure 44.

HARMONIC DISTORTION vs OUTPUT VOLTAGE SWING

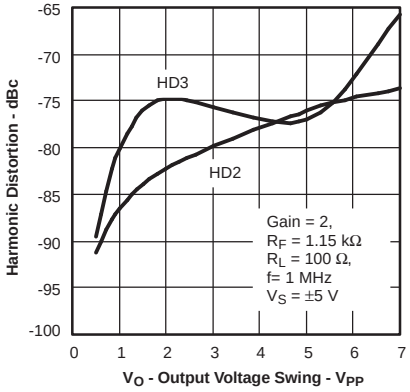


Figure 45.

HARMONIC DISTORTION vs OUTPUT VOLTAGE SWING

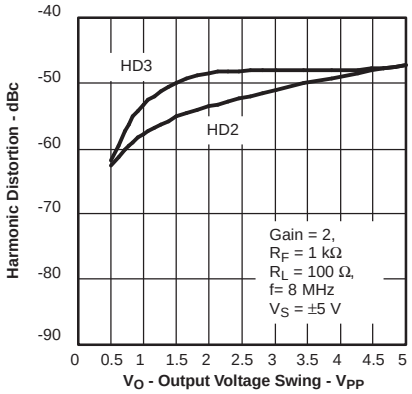


Figure 46.

NONINVERTING SMALL-SIGNAL TRANSIENT RESPONSE

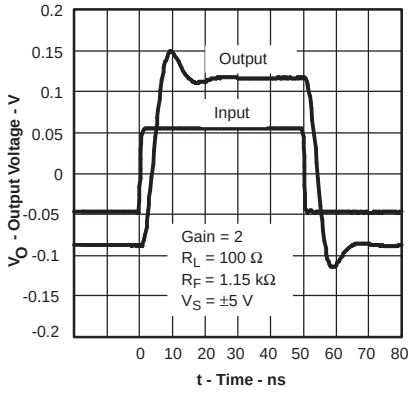


Figure 47.

INVERTING LARGE-SIGNAL TRANSIENT RESPONSE

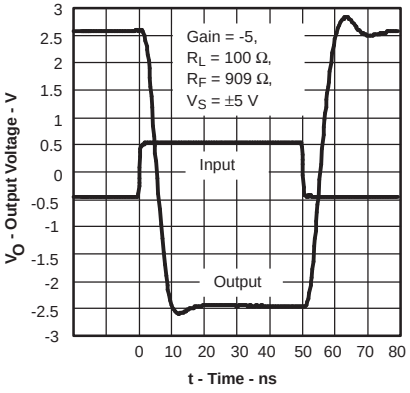


Figure 48.

OVERDRIVE RECOVERY TIME

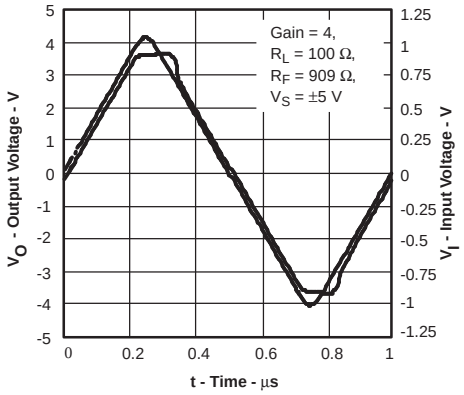


Figure 49.

REJECTION RATIO vs FREQUENCY

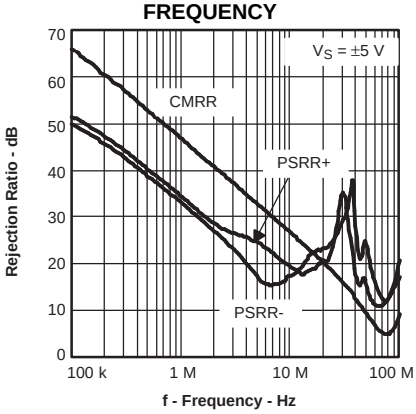


Figure 50.

Copyright © 2003–2009, Texas Instruments Incorporated

APPLICATION INFORMATION

MAXIMUM SLEW RATE FOR REPETITIVE SIGNALS

The THS3110 and THS3111 are recommended for high slew rate pulsed applications where the internal nodes of the amplifier have time to stabilize between pulses. It is recommended to have at least 20-ns delay between pulses.

The THS3110 and THS3111 are not recommended for applications with repetitive signals (sine, square, sawtooth, or other) that exceed 900 V/µs. Using the part in these applications results in excessive current draw from the power supply and possible device damage.

For applications with high slew rate, repetitive signals, the THS3091 and THS3095 (single), or THS3092 and THS3096 (dual) are recommended.

WIDEBAND, NONINVERTING OPERATION

The THS3110 and THS3111 are unity-gain stable, 100-MHz, current-feedback operational amplifiers, designed to operate from a ±5-V to ±15-V power supply.

Figure 51 shows the THS3111 in a noninverting gain of 2-V/V configuration typically used to generate the performance curves. Most of the curves were characterized using signal sources with 50-Ω source impedance, and with measurement equipment presenting a 50-Ω load impedance.

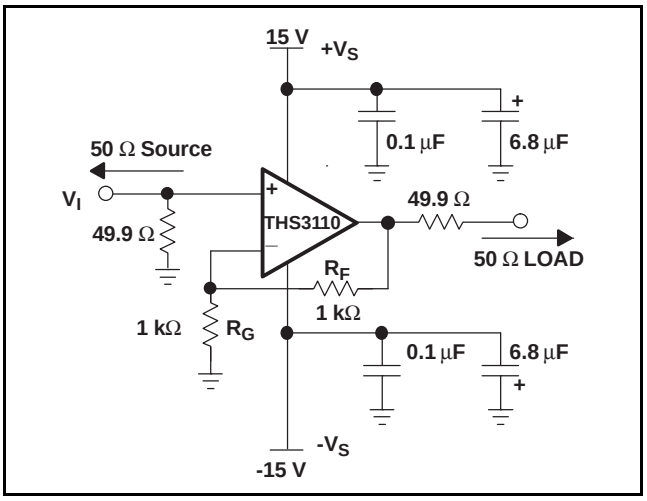


Figure 51. Wideband, Noninverting Gain Configuration

Current-feedback amplifiers are highly dependent on the feedback resistor R_F for maximum performance and stability. Table 1 shows the optimal gain setting resistors R_F and R_G at different gains to give maximum bandwidth with minimal peaking in the frequency response. Higher bandwidths can be achieved, at the expense of added peaking in the frequency response, by using even lower values for R_F. Conversely, increasing R_F decreases the bandwidth, but stability is improved.

Table 1. Recommended Resistor Values for Optimum Frequency Response

THS3110 AND THS3111 R_F AND R_G VALUES FOR MINIMAL PEAKING WITH R_L = 100 Ω			
GAIN (V/V)	SUPPLY VOLTAGE (V)	R_G (Ω)	R_F (Ω)
1	±15	—	1.5 k
	±5	—	1.5 k
2	±15	1 k	1 k
	±5	1.15 k	1.15 k
5	±15	200	806
	±5	200	806
10	±15	66.5	604
	±5	66.5	604
–1	±15	1 k	1 k
	±5	1 k	1 k
–2	±15 and ±5	549	1.1 k
–5	±15 and ±5	182	909
–10	±15 and ±5	64.9	649

Copyright © 2003–2009, Texas Instruments Incorporated

WIDEBAND, INVERTING OPERATION

Figure 52 shows the THS3111 in a typical inverting gain configuration where the input and output impedances and signal gain from Figure 51 are retained in an inverting circuit configuration.

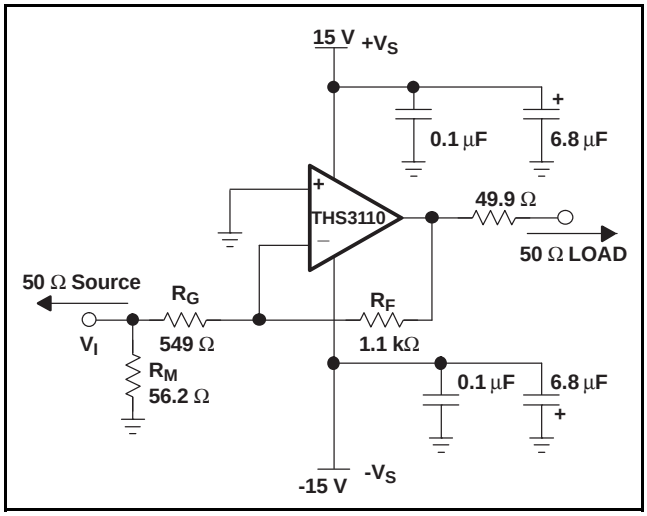


Figure 52. Wideband, Inverting Gain Configuration

SINGLE-SUPPLY OPERATION

The THS3110 and THS3111 have the capability to operate from a single-supply voltage ranging from 10 V to 30 V. When operating from a single power supply, biasing the input and output at mid-supply allows for the maximum output voltage swing. The circuits shown in Figure 53 shows inverting and noninverting amplifiers configured for single supply operations.

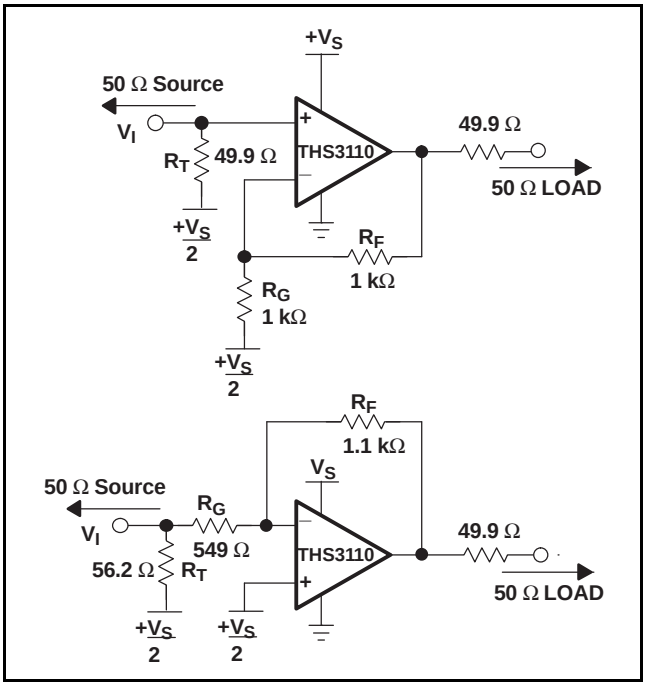


Figure 53. DC-Coupled, Single-Supply Operation

Video Distribution

The wide bandwidth, high slew rate, and high output drive current of the THS3110 and THS3111 match the demands for video distribution for delivering video signals down multiple cables. To ensure high signal quality with minimal degradation of performance, a 0.1-dB gain flatness should be at least 7x the passband frequency to minimize group delay variations from the amplifier. A high slew rate minimizes distortion of the video signal, and supports component video and RGB video signals that require fast transition times and fast settling times for high signal quality.

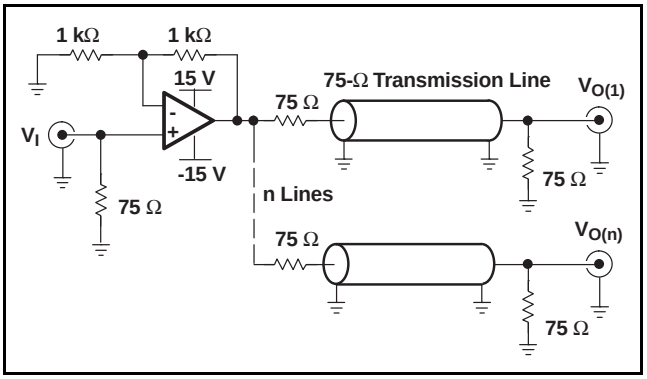


Figure 54. Video Distribution Amplifier Application

Copyright © 2003–2009, Texas Instruments Incorporated

Driving Capacitive Loads

Applications such as FET drivers and line drivers can be highly capacitive and cause stability problems for high-speed amplifiers.

Figure 55 through Figure 61 show recommended methods for driving capacitive loads. The basic idea is to use a resistor or ferrite chip to isolate the phase shift at high frequency caused by the capacitive load from the amplifier feedback path. See Figure 55 for recommended resistor values versus capacitive load.

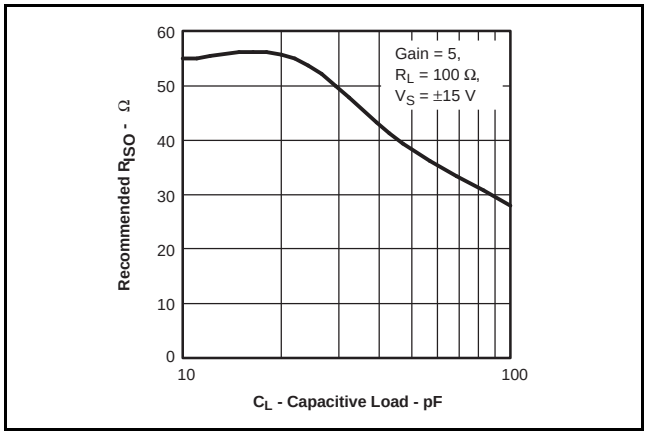


Figure 55. Recommended R_{ISO} vs Capacitive Load

Placing a small series resistor, R_{ISO}, between the amplifier output and the capacitive load, as shown in Figure 56, is an easy way of isolating the load capacitance.

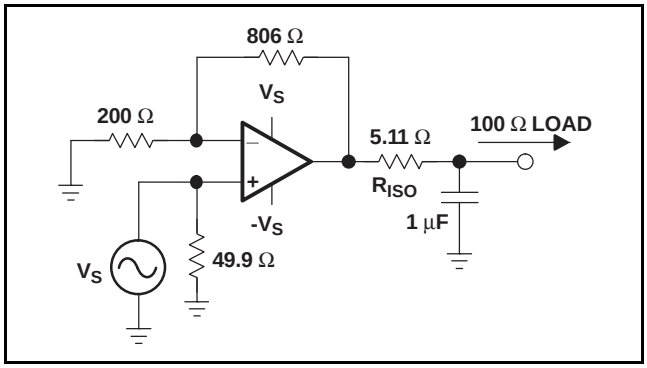


Figure 56. Resistor to Isolate Capacitive Load

Using a ferrite chip in place of R_{ISO}, as shown in Figure 57, is another approach of isolating the output of the amplifier. The ferrite impedance characteristic versus frequency is useful to maintain the low frequency load independence of the amplifier while isolating the phase shift caused by the capacitance at high frequency. Use a ferrite chip with similar impedance to R_{ISO}, 20 Ω to 50 Ω, at 100 MHz and low impedance at dc.

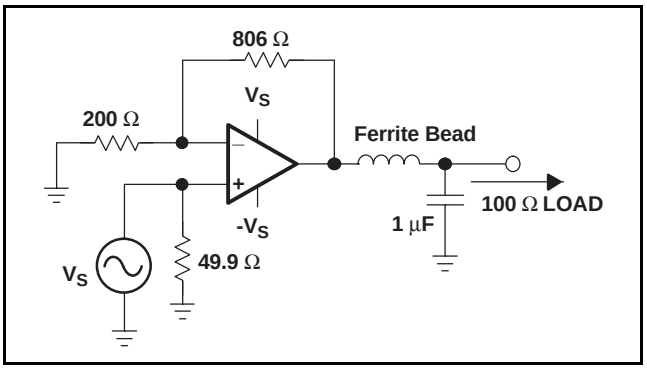


Figure 57. Ferrite Bead to Isolate Capacitive Load

Figure 58 shows another method used to maintain the low frequency load independence of the amplifier while isolating the phase shift caused by the capacitance at high frequency. At low frequency, feedback is mainly from the load side of R_{ISO}. At high frequency, the feedback is mainly via the 27-pF capacitor. The resistor R_{IN} in series with the negative input is used to stabilize the amplifier and should be equal to the recommended value of R_F at unity gain. Replacing R_{IN} with a ferrite of similar impedance at about 100 MHz as shown in Figure 59 gives similar results with reduced dc offset and low frequency noise. (See the *Additional Reference Material* section for expanding the usability of current-feedback amplifiers.)

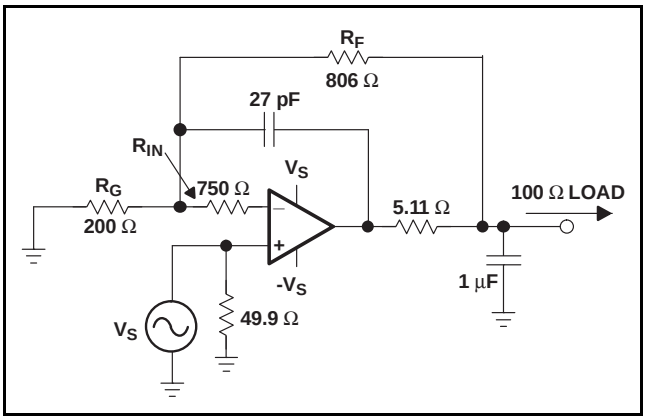


Figure 58. Feedback Technique with Input Resistor for Capacitive Load

Copyright © 2003–2009, Texas Instruments Incorporated

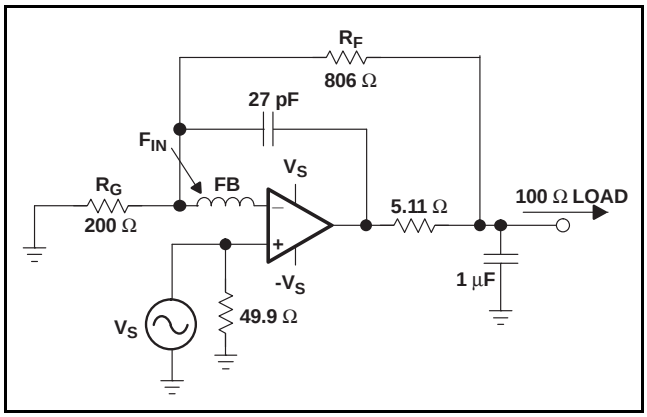


Figure 59. Feedback Technique with Input Ferrite Bead for Capacitive Load

Figure 60 shows how to use two amplifiers in parallel to double the output drive current to larger capacitive loads. This technique is used when more output current is needed to charge and discharge the load faster like when driving large FET transistors.

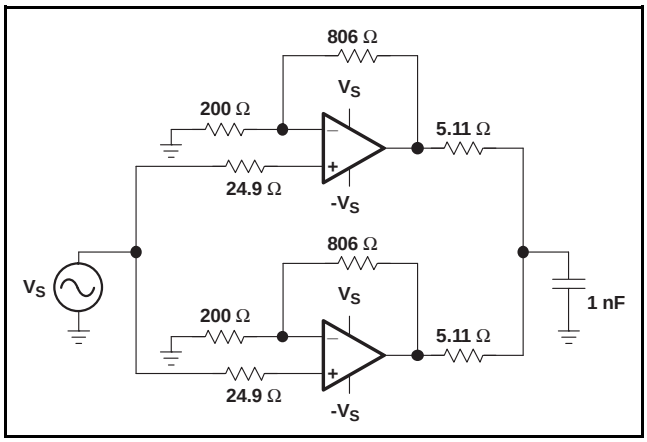


Figure 60. Parallel Amplifiers for Higher Output Drive

Figure 61 shows a push-pull FET driver circuit typical of ultrasound applications with isolation resistors to isolate the gate capacitance from the amplifier.

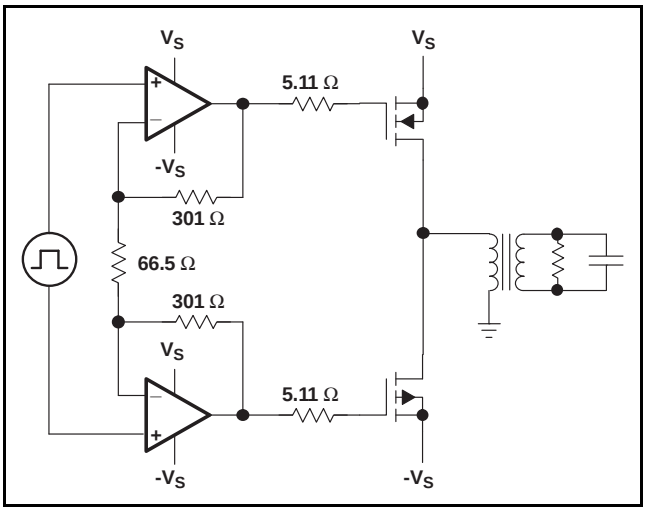


Figure 61. PowerFET Drive Circuit

SAVING POWER WITH POWER-DOWN FUNCTIONALITY AND SETTING THRESHOLD LEVELS WITH THE REFERENCE PIN

The THS3110 features a power-down pin (PD) which lowers the quiescent current from 4.8 mA down to 270 µA, ideal for reducing system power.

The power-down pin of the amplifier defaults to the REF pin voltage in the absence of an applied voltage, putting the amplifier in the normal *on* mode of operation. To turn off the amplifier in an effort to conserve power, the power-down pin can be driven towards the positive rail. The threshold voltages for power-on and power-down are relative to the supply rails and are given in the specification tables. Below the *Enable Threshold Voltage*, the device is on. Above the *Disable Threshold Voltage*, the device is off. Behavior in between these threshold voltages is not specified.

Note that this power-down functionality is just that; the amplifier consumes less power in power-down mode. The power-down mode is not intended to provide a high-impedance output. In other words, the power-down functionality is not intended to allow use as a 3-state bus driver. When in power-down mode, the impedance looking back into the output of the amplifier is dominated by the feedback and gain setting resistors, but the output impedance of the device itself varies depending on the voltage applied to the outputs.

Copyright © 2003–2009, Texas Instruments Incorporated

Figure 62 shows the total system output impedance which includes the amplifier output impedance in parallel with the feedback plus gain resistors, which cumulate to 1870 Ω. Figure 51 shows this circuit configuration for reference.

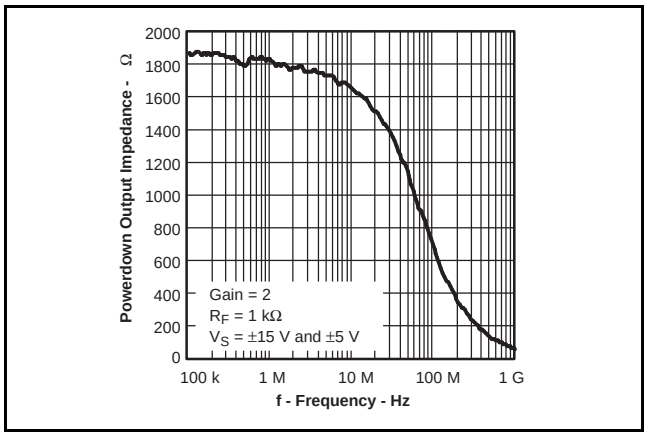


Figure 62. Power-Down Output Impedance vs Frequency

As with most current feedback amplifiers, the internal architecture places some limitations on the system when in power-down mode. Most notably is the fact that the amplifier actually turns *ON* if there is a ±0.7 V or greater difference between the two input nodes (V+ and V–) of the amplifier. If this difference exceeds ±0.7 V, the output of the amplifier creates an output voltage equal to approximately [(V+ – V–) – 0.7 V] × Gain. Also, if a voltage is applied to the output while in power-down mode, the V– node voltage is equal to $V_{O(applied)} \times R_G/(R_F + R_G)$. For low gain configurations and a large applied voltage at the output, the amplifier may actually turn *ON* due to the aforementioned behavior.

The time delays associated with turning the device on and off are specified as the time it takes for the amplifier to reach either 10% or 90% of the final output voltage. The time delays are in the order of microseconds because the amplifier moves in and out of the linear mode of operation in these transitions.

POWER-DOWN REFERENCE PIN OPERATION

In addition to the power-down pin, the THS3110 features a reference pin (REF) which allows the user to control the enable or disable power-down voltage levels applied to the PD pin. In most split-supply applications, the reference pin is connected to ground. In either case, the user needs to be aware of voltage-level thresholds that apply to the power-down pin. The tables below show examples and illustrate the relationship between the reference voltage and the power-down thresholds. In the table, the threshold levels are derived by the following equations:

PD ≤ REF + 0.8 V for enable

PD ≥ REF + 2.0 V for disable

where the usable range at the REF pin is

$V_{S–} \le V_{REF} \le (V_{S+} – 4\ V)$.

The recommended mode of operation is to tie the REF pin to midrail, thus setting the enable/disable thresholds to $V_{midrail}$ + 0.8 V and $V_{midrail}$ + 2 V respectively.

POWER-DOWN THRESHOLD VOLTAGE LEVELS			
SUPPLY VOLTAGE (V)	**REFERENCE PIN VOLTAGE (V)**	**ENABLE LEVEL (V)**	**DISABLE LEVEL (V)**
±15, ±5	0.0	0.8	2.0
±15	2.0	2.8	4
±15	–2.0	–1.2	0
±5	1.0	1.8	3
±5	–1.0	–0.2	1
+30	15	15.8	17
+10	5.0	5.8	7

Note that if the REF pin is left unterminated, it floats to the positive rail and falls outside of the recommended operating range given above ($V_{S–} \le V_{REF} \le V_{S+} – 4\ V$). As a result, it no longer serves as a reliable reference for the PD pin and the enable/disable thresholds given above no longer apply. If the PD pin is also left unterminated, it also floats to the positive rail and the device is disabled. If balanced, split supplies are used ($\pm V_S$) and the REF and PD pins are grounded, the device is enabled.

Copyright © 2003–2009, Texas Instruments Incorporated

PRINTED-CIRCUIT BOARD LAYOUT TECHNIQUES FOR OPTIMAL PERFORMANCE

Achieving optimum performance with a high-frequency amplifier, such as the THS3110 and THS3111, requires careful attention to board layout parasitic and external component types. Recommendations that optimize performance include:

- Minimize parasitic capacitance to any ac ground for all of the signal I/O pins. Parasitic capacitance on the output and input pins can cause instability. To reduce unwanted capacitance, a window around the signal I/O pins should be opened in all of the ground and power planes around those pins. Otherwise, ground and power planes should be unbroken elsewhere on the board.
- Minimize the distance [< 0.25 inch (6,35 mm)] from the power-supply pins to high frequency 0.1-µF and 100-pF decoupling capacitors. At the device pins, the ground and power plane layout should not be in close proximity to the signal I/O pins. Avoid narrow power and ground traces to minimize inductance between the pins and the decoupling capacitors. The power-supply connections should always be decoupled with these capacitors. Larger (6.8 µF or more) tantalum decoupling capacitors, effective at lower frequency, should also be used on the main supply pins. These may be placed somewhat farther from the device and may be shared among several devices in the same area of the PC board.
- Careful selection and placement of external components preserve the high-frequency performance of the THS3110 and THS3111. Resistors should be a very low reactance type. Surface-mount resistors work best and allow a tighter overall layout. Again, keep their leads and PC board trace length as short as possible. Never use wirewound-type resistors in a high-frequency application. Because the output pin and inverting input pins are the most sensitive to parasitic capacitance, always position the feedback and series output resistors, if any, as close as possible to the inverting input pins and output pins. Other network components, such as input termination resistors, should be placed close to the gain-setting resistors. Even with a low parasitic capacitance shunting the external resistors, excessively high resistor values can create significant time constants that can degrade performance. Good axial metal-film or surface-mount resistors have approximately 0.2 pF in shunt with the resistor. For resistor values greater than 2.0 kΩ, this parasitic capacitance can add a pole and/or a zero that can affect circuit operation. Keep resistor values as low as possible, consistent with load driving considerations.
- Connections to other wideband devices on the board may be made with short direct traces or through onboard transmission lines. For short connections, consider the trace and the input to the next device as a lumped capacitive load. Relatively wide traces [0.05 inch (1,3 mm) to 0.1 inch (2,54 mm)] should be used, preferably with ground and power planes opened up around them. Estimate the total capacitive load and determine if isolation resistors on the outputs are necessary. Low parasitic capacitive loads (< 4 pF) may not need an R_S since the THS3110 and THS3111 are nominally compensated to operate with a 2-pF parasitic load. Higher parasitic capacitive loads without an R_S are allowed as the signal gain increases (increasing the unloaded phase margin). If a long trace is required, and the 6-dB signal loss intrinsic to a doubly-terminated transmission line is acceptable, implement a matched impedance transmission line using microstrip or stripline techniques (consult an ECL design handbook for microstrip and stripline layout techniques). A 50-Ω environment is not necessary onboard, and in fact, a higher impedance environment improves distortion as shown in the distortion versus load plots. With a characteristic board trace impedance based on board material and trace dimensions, a matching series resistor into the trace from the output of the THS3110/THS3111 is used as well as a terminating shunt resistor at the input of the destination device. Remember also that the terminating impedance is the parallel combination of the shunt resistor and the input impedance of the destination device: this total effective impedance should be set to match the trace impedance. If the 6-dB attenuation of a doubly-terminated transmission line is unacceptable, a long trace can be series-terminated at the source end only. Treat the trace as a capacitive load in this case. This does not preserve signal integrity as well as a doubly-terminated line. If the input impedance of the destination device is low, there is some signal attenuation due to the voltage divider formed by the series output into the terminating impedance.
- Socketing a high-speed part like the THS3110 and THS3111 is not recommended. The additional lead length and pin-to-pin capacitance introduced by the socket can create an extremely troublesome parasitic network which can make it almost impossible to achieve a smooth, stable frequency response. Best results are obtained by soldering the THS3110/THS3111 parts directly onto the board.

Copyright © 2003–2009, Texas Instruments Incorporated

PowerPAD DESIGN CONSIDERATIONS

The THS3110 and THS3111 are available in a thermally-enhanced PowerPAD family of packages. These packages are constructed using a downset leadframe upon which the die is mounted (see Figure 63a and Figure 63b). This arrangement results in the lead frame being exposed as a thermal pad on the underside of the package (see Figure 63c). Because this thermal pad has direct thermal contact with the die, excellent thermal performance can be achieved by providing a good thermal path away from the thermal pad. Note that devices such as the THS311x have no electrical connection between the PowerPAD and the die.

The PowerPAD package allows for both assembly and thermal management in one manufacturing operation. During the surface-mount solder operation (when the leads are being soldered), the thermal pad can also be soldered to a copper area underneath the package. Through the use of thermal paths within this copper area, heat can be conducted away from the package into either a ground plane or other heat dissipating device.

The PowerPAD package represents a breakthrough in combining the small area and ease of assembly of surface mount with the, heretofore, awkward mechanical methods of heatsinking.


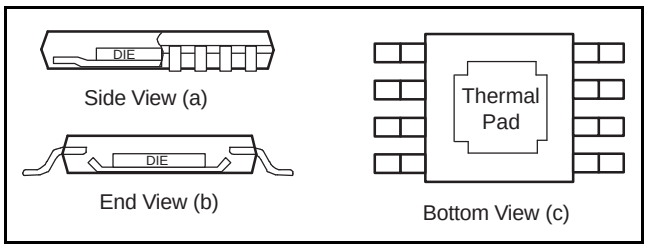


Figure 63. Views of Thermal Enhanced Package

Although there are many ways to properly heatsink the PowerPAD package, the following steps illustrate the recommended approach.

PowerPAD LAYOUT CONSIDERATIONS

1. PCB with a top side etch pattern as shown in Figure 64. There should be etch for the leads as well as etch for the thermal pad.

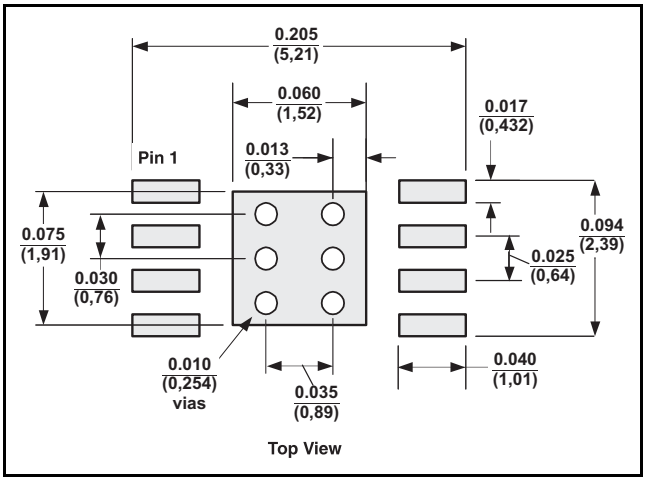

Dimensions are in inches (mm).

Figure 64. DGN PowerPAD PCB Etch and Via Pattern

2. Place five holes in the area of the thermal pad. These holes should be 0.01 inch (0,254 mm) in diameter. Keep them small so that solder wicking through the holes is not a problem during reflow.
3. Additional vias may be placed anywhere along the thermal plane outside of the thermal pad area. This helps dissipate the heat generated by the THS3110/THS3111 IC. These additional vias may be larger than the 0.01-inch (0,254 mm) diameter vias directly under the thermal pad. They can be larger because they are not in the thermal pad area to be soldered so that wicking is not a problem.
4. Connect all holes to the internal ground plane. Note that the PowerPAD is electrically isolated from the silicon and all leads. Connecting the PowerPAD to any potential voltage such as V_{S-}, is acceptable as there is no electrical connection to the silicon.
5. When connecting these holes to the ground plane, do not use the typical web or spoke via connection methodology. Web connections have a high thermal resistance connection that is useful for slowing the heat transfer during soldering operations. This makes the soldering of vias that have plane connections easier. In this application, however, low thermal resistance is desired for the most efficient heat transfer. Therefore, the holes under the THS3110/THS3111 PowerPAD package should make their connection to the internal ground plane with a complete connection around the

Copyright © 2003–2009, Texas Instruments Incorporated

entire circumference of the plated-through hole.

6. The top-side solder mask should leave the terminals of the package and the thermal pad area with its five holes exposed. The bottom-side solder mask should cover the five holes of the thermal pad area. This prevents solder from being pulled away from the thermal pad area during the reflow process.
7. Apply solder paste to the exposed thermal pad area and all of the IC terminals.
8. With these preparatory steps in place, the IC is simply placed in position and run through the solder reflow operation as any standard surface-mount component. This results in a part that is properly installed.

POWER DISSIPATION AND THERMAL CONSIDERATIONS

The THS3110 and THS3111 incorporate automatic thermal shutoff protection. This protection circuitry shuts down the amplifier if the junction temperature exceeds approximately +160°C. When the junction temperature reduces to approximately +140°C, the amplifier turns on again. But, for maximum performance and reliability, the designer must take care to ensure that the design does not exceed a junction temperature of +125°C. Between +125°C and +150°C, damage does not occur, but the performance of the amplifier begins to degrade and long term reliability suffers. The thermal characteristics of the device are dictated by the package and the PC board. Maximum power dissipation for a given package can be calculated using the following formula.


$$P_{DMax} = \frac{T_{Max} - T_A}{\theta_{JA}} \quad (1)$$

Where:

- P_{DMax} is the maximum power dissipation in the amplifier (W)
- T_{Max} is the absolute maximum junction temperature (°C)
- T_A is the ambient temperature (°C)
- $\theta_{JA} = \theta_{JC} + \theta_{CA}$
- θ_{JC} is the thermal coefficient from the silicon junctions to the case (°C/W)
- θ_{CA} is the thermal coefficient from the case to ambient air (°C/W)

For systems where heat dissipation is more critical, the THS3110 and THS3111 are offered in an MSOP-8 with PowerPAD package offering even better thermal performance. The thermal coefficient for the PowerPAD packages are substantially improved over the traditional SOIC.

Maximum power dissipation levels are depicted in Figure 65 for the available packages. The data for the PowerPAD packages assume a board layout that follows the PowerPAD layout guidelines referenced above and detailed in the PowerPAD application note (literature number SLMA002). Figure 65 also illustrates the effect of not soldering the PowerPAD to a PCB. The thermal impedance increases substantially which may cause serious heat and performance issues. Be sure to always solder the PowerPAD to the PCB for optimum performance.

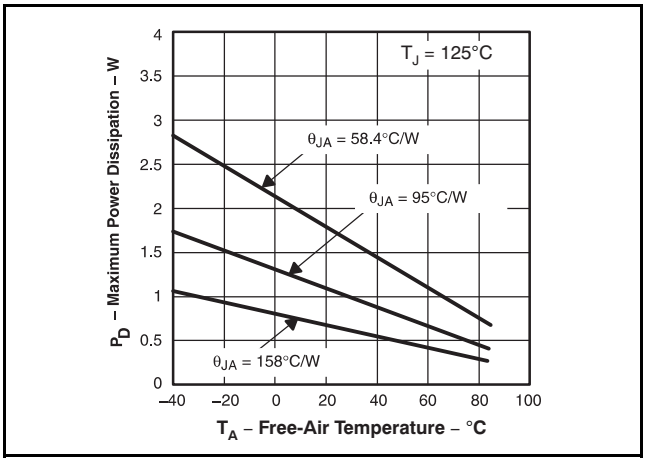

Results are with no airflow and PCB size = 3 in × 3 in (7,62 mm × 7,62 mm); θ_{JA} = 58.4°C/W for MSOP-8 with PowerPAD (DGN); θ_{JA} = 95°C/W for SOIC-8 High-K Test PCB (D); θ_{JA} = 158°C/W for MSOP-8 with PowerPAD, without solder.

Figure 65. Maximum Power Distribution vs Ambient Temperature

When determining whether or not the device satisfies the maximum power dissipation requirement, it is important to not only consider quiescent power dissipation, but also dynamic power dissipation. Often times, this is difficult to quantify because the signal pattern is inconsistent, but an estimate of the RMS power dissipation can provide visibility into a possible problem.

DESIGN TOOLS

Evaluation Fixtures, Spice Models, and Application Support

Texas Instruments is committed to providing its customers with the highest quality of applications support. To support this goal an evaluation board has been developed for the THS3110 and THS3111 operational amplifiers. The board is easy to use, allowing for straightforward evaluation of the device. The evaluation board can be ordered through the Texas Instruments web site, www.ti.com, or through your local Texas Instruments sales representative.

Copyright © 2003–2009, Texas Instruments Incorporated

Computer simulation of circuit performance using SPICE is often useful when analyzing the performance of analog circuits and systems. This is particularly true for video and RF-amplifier circuits where parasitic capacitance and inductance can have a major effect on circuit performance. A SPICE model for the THS3111 is available through the Texas Instruments web site (www.ti.com). The product information center (PIC) is also available for design assistance and detailed product information. These models do a good job of predicting small-signal ac and transient performance under a wide variety of operating conditions. They are not intended to model the distortion characteristics of the amplifier, nor do they attempt to distinguish between the package types in their small-signal ac performance. Detailed information about what is and is not modeled is contained in the model file itself.

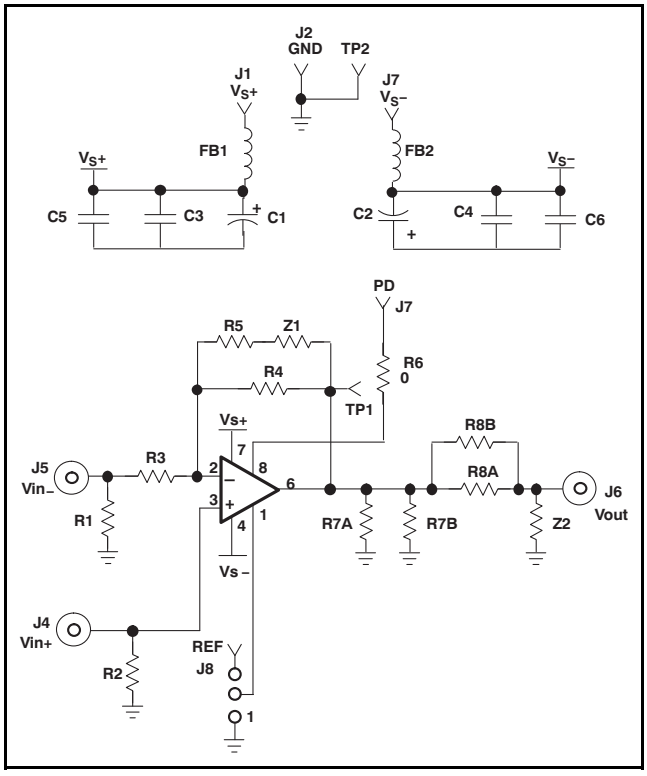


Figure 66. THS3110 EVM Circuit Configuration

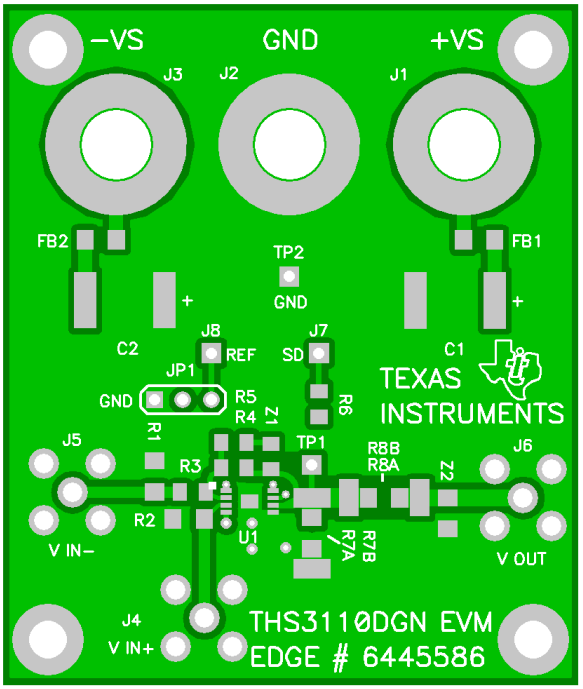


Figure 67. THS3110 EVM Board Layout (Top Layer)

NOTE: The Edge number for the THS3111 is 6445587.

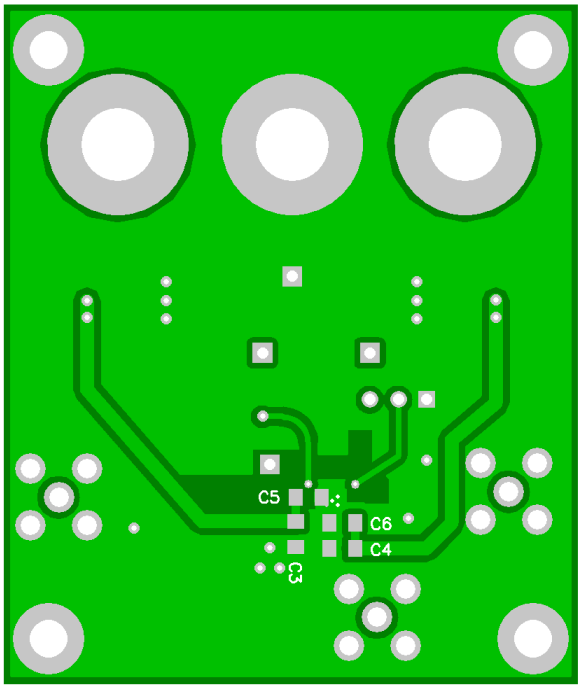


Figure 68. THS3110 EVM Board Layout (Bottom Layer)

Copyright © 2003–2009, Texas Instruments Incorporated

Table 2. Bill of Materials

THS3110DGN and THS3111DGN EVM					
ITEM	**DESCRIPTION**	**SMD SIZE**	**REFERENCE DESIGNATOR**	**PCB QTY**	**MANUFACTURER'S PART NUMBER (1)**
1	Bead, ferrite, 3 A, 80 Ω	1206	FB1, FB2	2	(Steward) HI1206N800R-00
2	Capacitor 6.8 µF, tantalum, 35 V, 10%	D	C1, C2	2	(AVX) TAJD685K035R
3	Open	0805	R5, Z1	2	
4	Capacitor 0.1 µF, ceramic, X7R, 50 V	0805	C3, C4	2	(AVX) 08055C104KAT2A
5	Capacitor 100 pF, ceramic, NPO, 100 V	0805	C5, C6	2	(AVX) 08051A101JAT2A
6	Resistor, 0 Ω, 1/8 W, 1%	0805	R6(2)	1	(Phycomp) 9C08052A0R00JLHFT
7	Resistor, 750 Ω, 1/8 W, 1%	0805	R3, R4	2	(Phycomp) 9C08052A7500FKHFT
8	Open	1206	R7A, Z2	2	
9	Resistor, 49.9 Ω, 1/4 W, 1%	1206	R2, R8A	2	(Phycomp) 9C12063A49R9FKRFT
10	Resistor, 53.6 Ω, 1/4 W, 1%	1206	R1	1	(Phycomp) 9C12063A53R6FKRFT
11	Open	2512	R7B, R8B	2	
12	Header, 0.1" (2,54 mm) CTRS, 0.025" (6,35 mm) SQ pins	3 Pos.	JP1(2)	1	(Sullins) PZC36SAAN
13	Shunts		JP1(2)	1	(Sullins) SSC02SYAN
14	Jack, banana receptance, 0.25" (6,35 mm) dia. hole		J1, J2, J3	3	(SPC) 813
15	Test point, red		J7(2), J8(2), TP1	3	(Keystone) 5000
16	Test point, black		TP2	1	(Keystone) 5001
17	Connector, SMA PCB jack		J4, J5, J6	3	(Amphenol) 901-144-8RFX
18	Standoff, 4-40 hex, 0.625" (15,875 mm) length			4	(Keystone) 1808
19	Screw, Phillips, 4-40, 0.250" (6,35 mm)			4	SHR-0440-016-SN
20	IC, THS3110		U1	1	(TI) THS3110DGN
21	Board, printed-circuit (THS3110)			1	(TI) EDGE # 6445586
22	IC, THS3111		U1	1	(TI) THS3111DGN
23	Board, printed-circuit (THS3111)			1	(TI) EDGE # 6445587

(1) Manufacturer part numbers are used for test purposes only.
(2) Applies to the THS3110DGN EVM only.

ADDITIONAL REFERENCE MATERIAL

- PowerPAD Made Easy, application brief (SLMA004)
- PowerPAD Thermally-Enhanced Package, technical brief (SLMA002)
- Voltage Feedback vs Current Feedback Amplifiers, (SLVA051)
- Current Feedback Analysis and Compensation (SLOA021)
- Current Feedback Amplifiers: Review, Stability, and Application (SBOA081)
- Effect of Parasitic Capacitance in Op Amp Circuits (SLOA013)
- Expanding the Usability of Current-Feedback Amplifiers, by Randy Stephens, 3Q 2003 Analog Applications Journal www.ti.com/sc/analogapps).

Copyright © 2003–2009, Texas Instruments Incorporated

REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision D (May 2008) to Revision E **Page**

- Changed Power-Down Characteristics, *Power-down quiescent current* test conditions of V_S = ±15 V Electrical Characteristics 5
- Changed Power-Down Characteristics, *PD pin bias current* parameter of V_S = ±15 V Electrical Characteristics 5
- Changed Power-Down Characteristics, *Power-down quiescent current* test conditions of V_S = ±5 V Electrical Characteristics 7
- Changed Power-Down Characteristics, *PD pin bias current* parameter of V_S = ±5 V Electrical Characteristics 7
- Added caption title to Figure 56 18
- Added caption title to Figure 57 18
- Added caption title to Figure 58 18
- Added caption title to Figure 59 19
- Added caption title to Figure 60 19
- Changed the first sentence of the second paragraph of *Saving Power with Power-Down Functionality* section 19

Changes from Revision C (February, 2007) to Revision D **Page**

- Changed V_S = ±15 V *Transimpedance* specifications from 1.5 MΩ (typ) to 1 MΩ (typ); 1 MΩ (at +25°C) to 0.75 MΩ; 0.7 MΩ (over temperature) to 0.5 MΩ 4
- Changed V_S = ±15 V *Input offset voltage* specifications from 1.5 mV (typ) to 3 mV (typ); 6 mV (at +25°C) to 10 mV; 8 mV (over temperature) to 12 mV 4
- Changed V_S = ±15 V *+PSRR* specifications from 83 dB to 75 dB (typ); from 75 dB to 65 dB (at +25°C); from 70 dB (over temperature) to 60 dB 5
- Changed V_S = ±15 V *–PSRR* specifications from 78 dB to 69 dB (typ); from 70 dB to 60 dB (at +25°C); from 66 dB (over temperature) to 55 dB 5
- Changed V_S = ±5 V *Transimpedance* specifications from 1.6 MΩ (typ) to 1 MΩ (typ); 1 MΩ (at +25°C) to 0.75 MΩ; 0.7 MΩ (over temperature) to 0.5 MΩ 6
- Changed V_S = ±5 V *Input offset voltage* specifications from 3 mV (typ) to 6 mV (typ); 6 mV (at +25°C) to 10 mV; 8 mV (over temperature) to 12 mV 6
- Changed V_S = ±5 V *+PSRR* specifications from 80 dB to 71 dB (typ); from 72 dB to 62 dB (at +25°C); from 67 dB (over temperature) to 57 dB 7
- Changed V_S = ±5 V *–PSRR* specifications from 75 dB to 66 dB (typ); from 67 dB to 57 dB (at +25°C); from 62 dB (over temperature) to 52 dB 7
- Corrected Typical Characteristic figure numbering errors from previous version 9
- Updated ±15 V *Transimpedance vs Frequency* characteristic graph 11

Copyright © 2003–2009, Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
THS3110ID	ACTIVE	SOIC	D	8	75	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	3110I	Samples
THS3110IDGN	ACTIVE	MSOP-PowerPAD	DGN	8	80	Green (RoHS & no Sb/Br)	CU NIPDAU | CU NIPDAUAG	Level-1-260C-UNLIM	-40 to 85	BIR	Samples
THS3110IDGNR	ACTIVE	MSOP-PowerPAD	DGN	8	2500	Green (RoHS & no Sb/Br)	CU NIPDAU | CU NIPDAUAG	Level-1-260C-UNLIM	-40 to 85	BIR	Samples
THS3110IDR	ACTIVE	SOIC	D	8	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	3110I	Samples
THS3110IDRG4	ACTIVE	SOIC	D	8	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	3110I	Samples
THS3111CD	ACTIVE	SOIC	D	8	75	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	3111C	Samples
THS3111CDG4	ACTIVE	SOIC	D	8	75	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	3111C	Samples
THS3111ID	ACTIVE	SOIC	D	8	75	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	3111I	Samples
THS3111IDG4	ACTIVE	SOIC	D	8	75	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	3111I	Samples
THS3111IDGN	ACTIVE	MSOP-PowerPAD	DGN	8	80	Green (RoHS & no Sb/Br)	CU NIPDAU | CU NIPDAUAG	Level-1-260C-UNLIM	-40 to 85	BIS	Samples
THS3111IDGNR	ACTIVE	MSOP-PowerPAD	DGN	8	2500	Green (RoHS & no Sb/Br)	CU NIPDAU | CU NIPDAUAG	Level-1-260C-UNLIM	-40 to 85	BIS	Samples
THS3111IDR	ACTIVE	SOIC	D	8	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	3111I	Samples

(1) The marketing status values are defined as follows:
ACTIVE: Product device recommended for new designs.
LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.
NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.
PREVIEW: Device has been announced but is not in production. Samples may or may not be available.
OBSOLETE: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".
RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.


(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

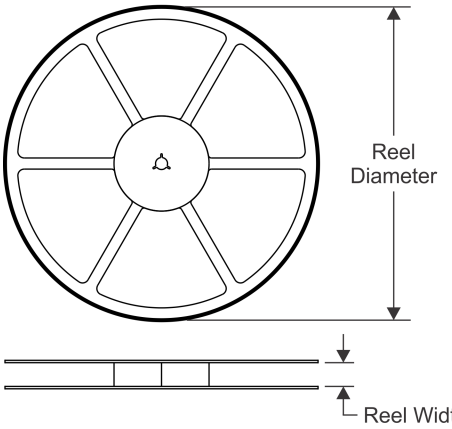


TAPE DIMENSIONS

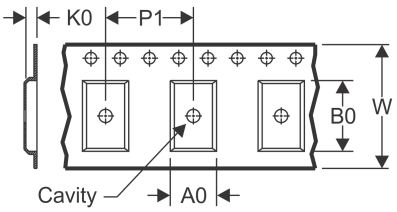

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

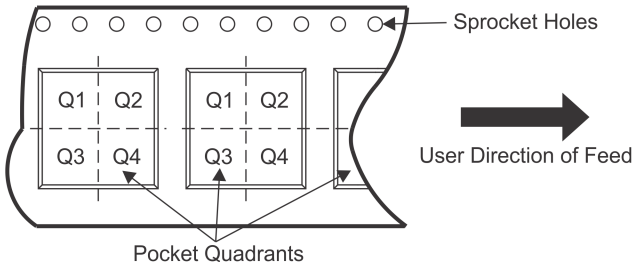

*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
THS3110IDGNR	MSOP-Power PAD	DGN	8	2500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
THS3110IDR	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
THS3111IDGNR	MSOP-Power PAD	DGN	8	2500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
THS3111IDR	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1

TAPE AND REEL BOX DIMENSIONS

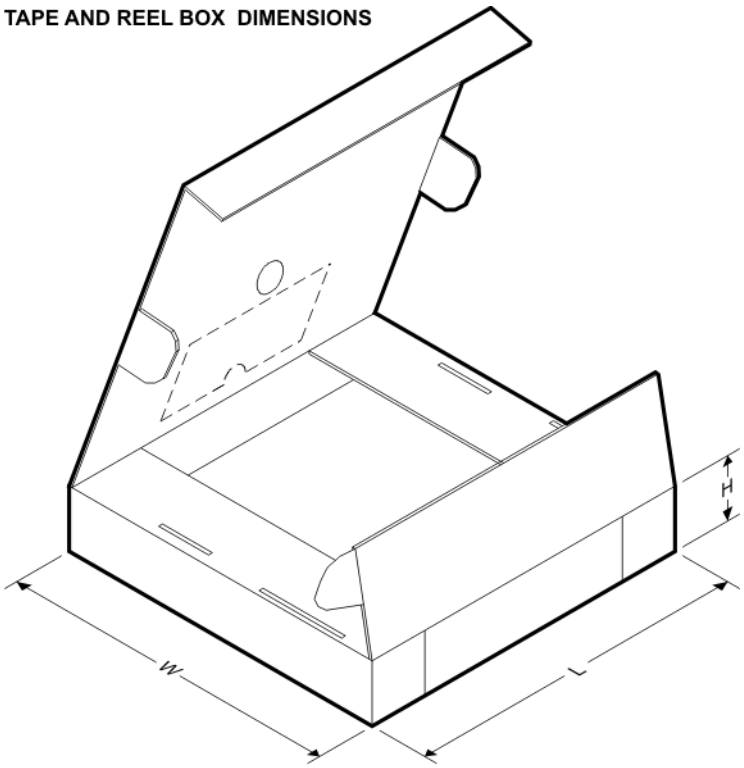

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
THS3110IDGNR	MSOP-PowerPAD	DGN	8	2500	364.0	364.0	27.0
THS3110IDR	SOIC	D	8	2500	350.0	350.0	43.0
THS3111IDGNR	MSOP-PowerPAD	DGN	8	2500	364.0	364.0	27.0
THS3111IDR	SOIC	D	8	2500	350.0	350.0	43.0




PACKAGE OUTLINE

D0008A


SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

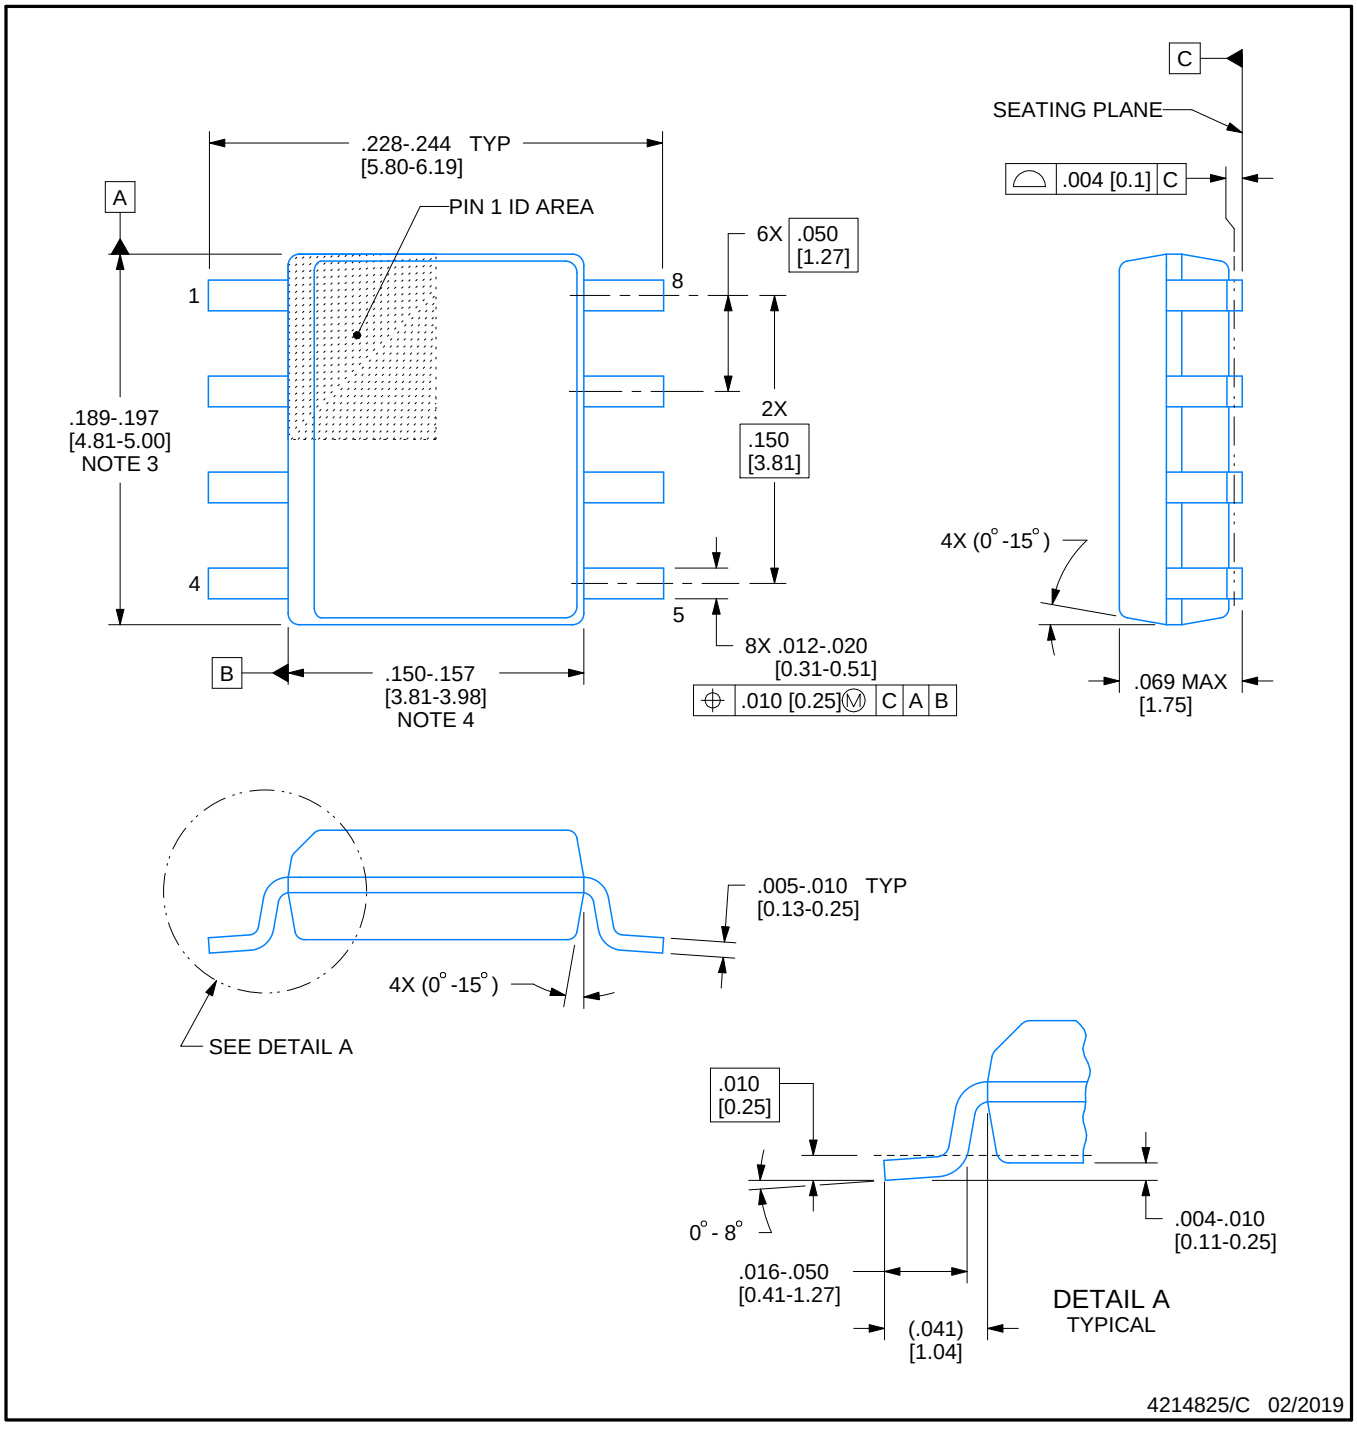


NOTES:

1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.

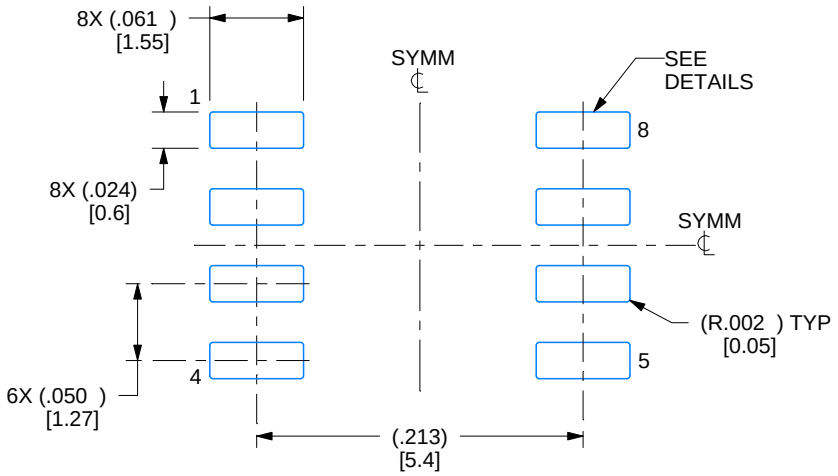

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:8X

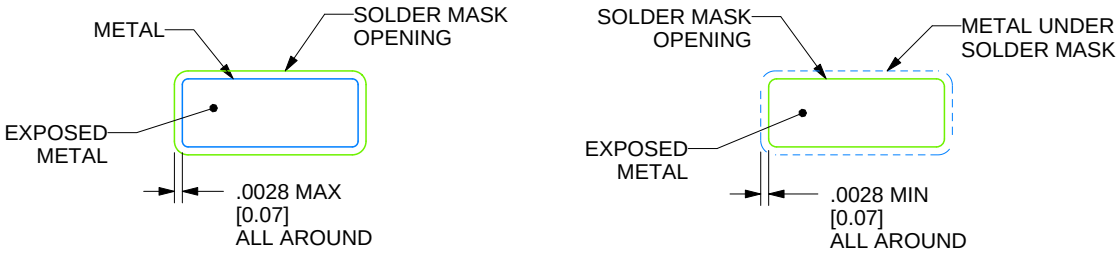

SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

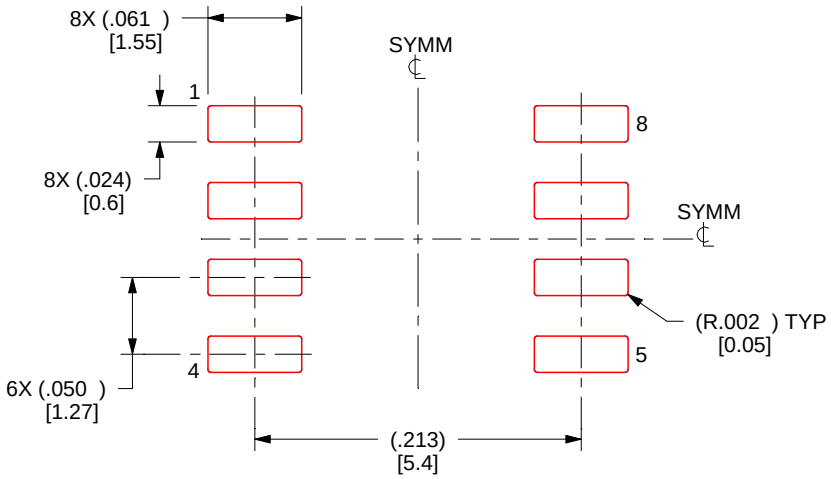


SOLDER PASTE EXAMPLE
BASED ON .005 INCH [0.125 MM] THICK STENCIL
SCALE:8X

4214825/C 02/2019

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

DGN (S–PDSO–G8) PowerPAD™ PLASTIC SMALL OUTLINE

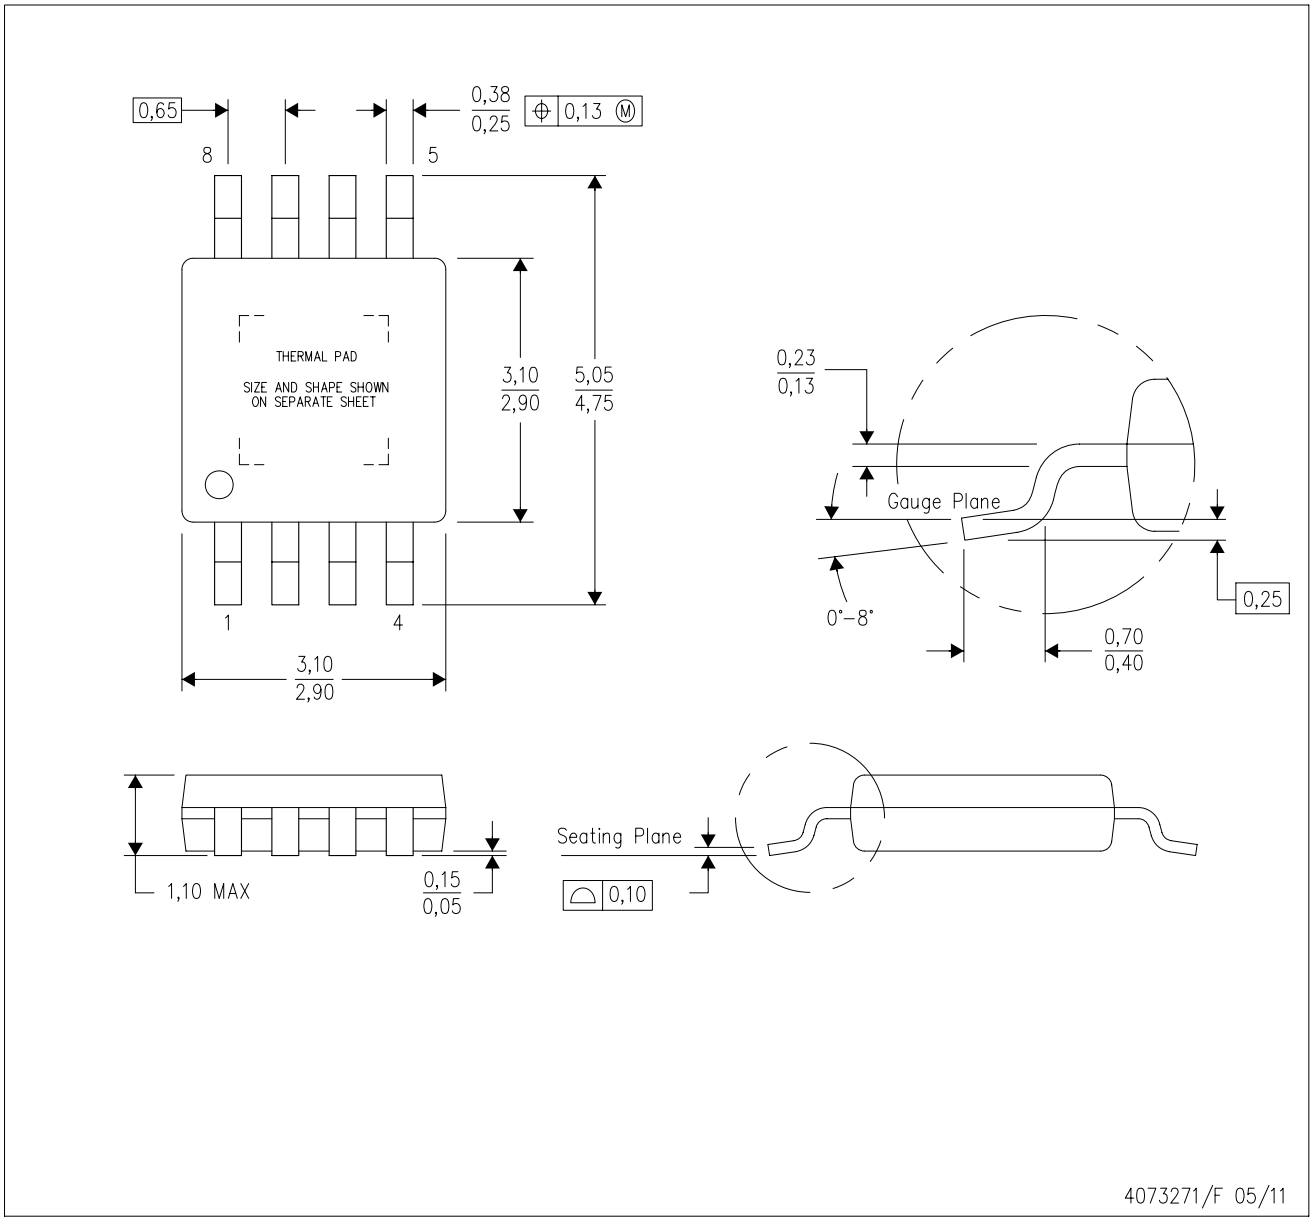

NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Body dimensions do not include mold flash or protrusion.
D. This package is designed to be soldered to a thermal pad on the board. Refer to Technical Brief, PowerPad Thermally Enhanced Package, Texas Instruments Literature No. SLMA002 for information regarding recommended board layout. This document is available at www.ti.com <http://www.ti.com>.
E. See the additional figure in the Product Data Sheet for details regarding the exposed thermal pad features and dimensions.
F. Falls within JEDEC MO–187 variation AA–T

PowerPAD is a trademark of Texas Instruments.


DGN (S–PDSO–G8) PowerPAD™ PLASTIC SMALL OUTLINE

THERMAL INFORMATION

This PowerPAD™ package incorporates an exposed thermal pad that is designed to be attached to a printed circuit board (PCB). The thermal pad must be soldered directly to the PCB. After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For additional information on the PowerPAD package and how to take advantage of its heat dissipating abilities, refer to Technical Brief, PowerPAD Thermally Enhanced Package, Texas Instruments Literature No. SLMA002 and Application Brief, PowerPAD Made Easy, Texas Instruments Literature No. SLMA004. Both documents are available at www.ti.com.

The exposed thermal pad dimensions for this package are shown in the following illustration.

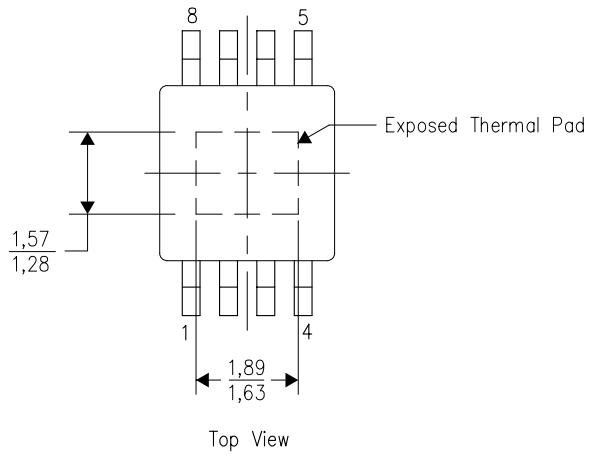

Top View


Exposed Thermal Pad Dimensions

4206323–2/I 12/11

NOTE: All linear dimensions are in millimeters

PowerPAD is a trademark of Texas Instruments

DGN (R–PDSO–G8) PowerPAD™ PLASTIC SMALL OUTLINE

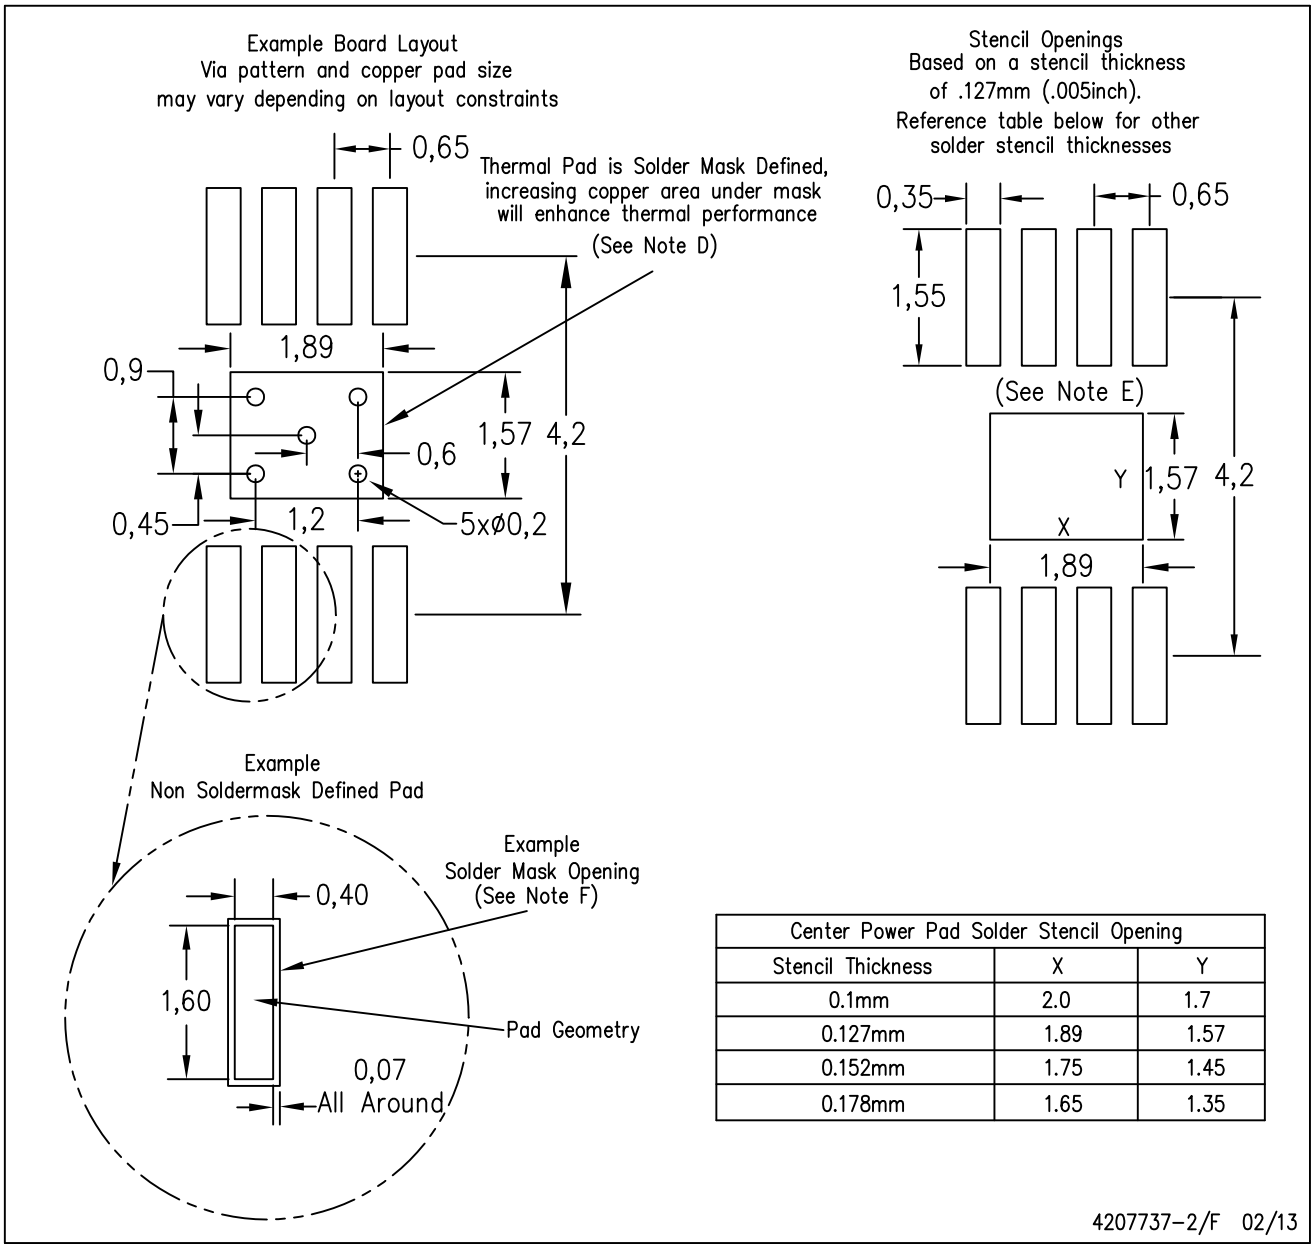

Center Power Pad Solder Stencil Opening		
Stencil Thickness	X	Y
0.1mm	2.0	1.7
0.127mm	1.89	1.57
0.152mm	1.75	1.45
0.178mm	1.65	1.35

4207737–2/F 02/13

NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Customers should place a note on the circuit board fabrication drawing not to alter the center solder mask defined pad.
D. This package is designed to be soldered to a thermal pad on the board. Refer to Technical Brief, PowerPad Thermally Enhanced Package, Texas Instruments Literature No. SLMA002, SLMA004, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at www.ti.com <http://www.ti.com>.
E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Example stencil design based on a 50% volumetric metal load solder paste. Refer to IPC–7525 for other stencil recommendations.
F. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

PowerPAD is a trademark of Texas Instruments

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI’s products are provided subject to TI’s Terms of Sale (www.ti.com/legal/termsofsale.html) or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI’s provision of these resources does not expand or otherwise alter TI’s applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2019, Texas Instruments Incorporated