

Broadband Amplifier, 0.1 to 26.5 GHz, 38 dB Gain, 12 dBm P_{1dB} , 5 dB NF

Description:

Model SBB-0122733808-KFKF-E3 is a broadband amplifier with a typical small signal gain of 38 dB, a nominal P_{1dB} of +12 dBm, and a typical noise figure of 5 dB across the frequency range of 0.1 to 26.5 GHz. The DC power requirement for the amplifier is +8 V_{DC}/500 mA. RF connectors are female K connectors. The heatsink is recommended for better heat management. Other port configurations are available under different model numbers.



Features:

- High Output Power
- Good Gain Flatness

Applications:

- Radar Systems
- Communication Systems
- Test Equipment



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	0.1 GHz		26.5 GHz
Gain		38 dB	
P_{1dB}		+12 dBm	
P_{sat}		+14 dBm	
Noise Figure (3 - 26.5 GHz)		5 dB	
P_{in}			-20 dBm
Input Return Loss		8 dB	
Output Return Loss		8 dB	
DC Voltage	+6 V _{DC}	+8 V _{DC}	+15 V _{DC}
DC Supply Current		500 mA	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

Mechanical Specifications:

Item	Specification
Input Port	K (F)
Output Port	K (F)
Bias	Solder Pin
Case Material	Brass
Finish	Gold Plated
Weight	3.2 Oz
Size	1.38" (L) x 1.58" (W) x 0.47" (H)
Outline	BG-ZC-1

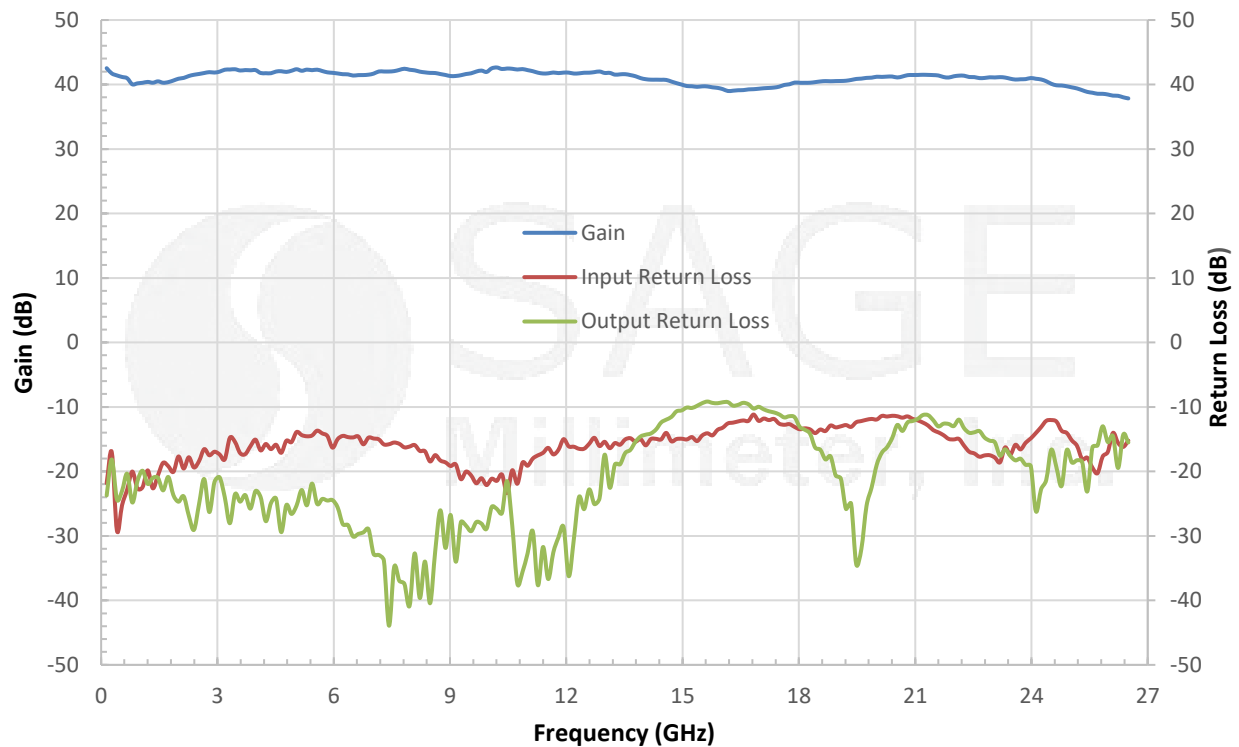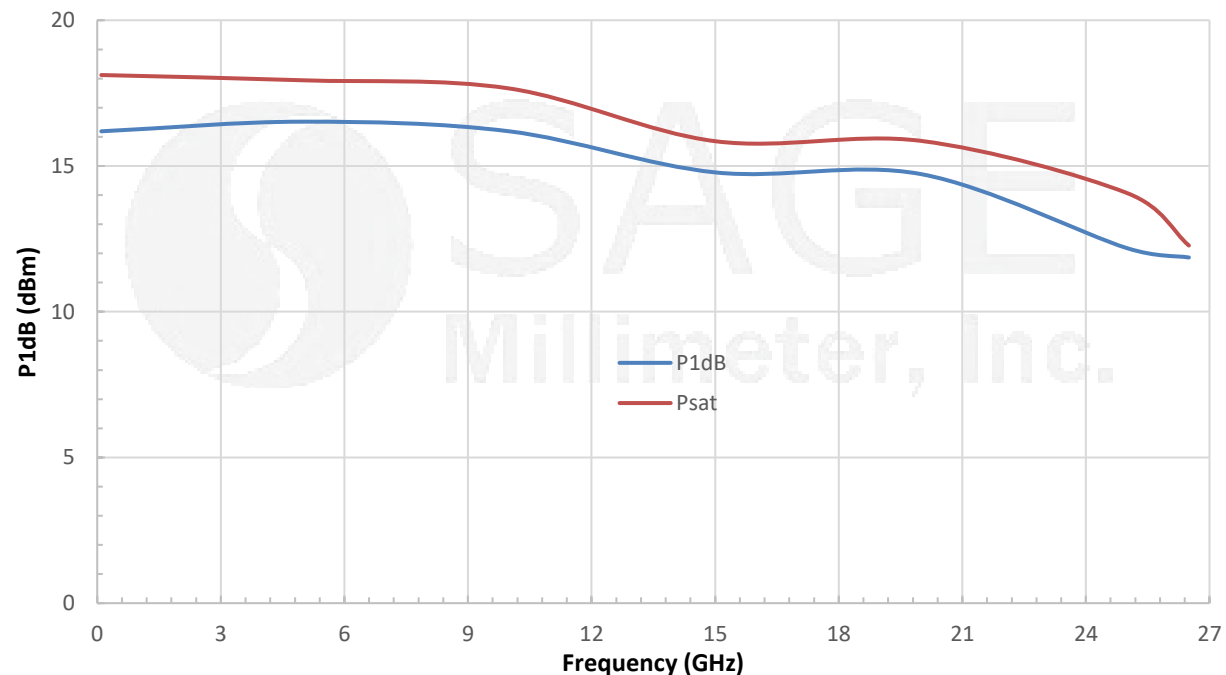


**Broadband Amplifier, 0.1 to 26.5 GHz, 38 dB Gain, 12 dBm P_{1dB}, 5 dB NF****Typical Gain and Return Loss vs. Frequency**Bias: +8 V_{DC}/648 mA**Typical P_{1dB} vs. Frequency**Bias: +8 V_{DC}/648 mA


Broadband Amplifier, 0.1 to 26.5 GHz, 38 dB Gain, 12 dBm P_{1dB}, 5 dB NF

Typical Noise Figure vs. Frequency

Bias: +8 V_{DC}/648 mA

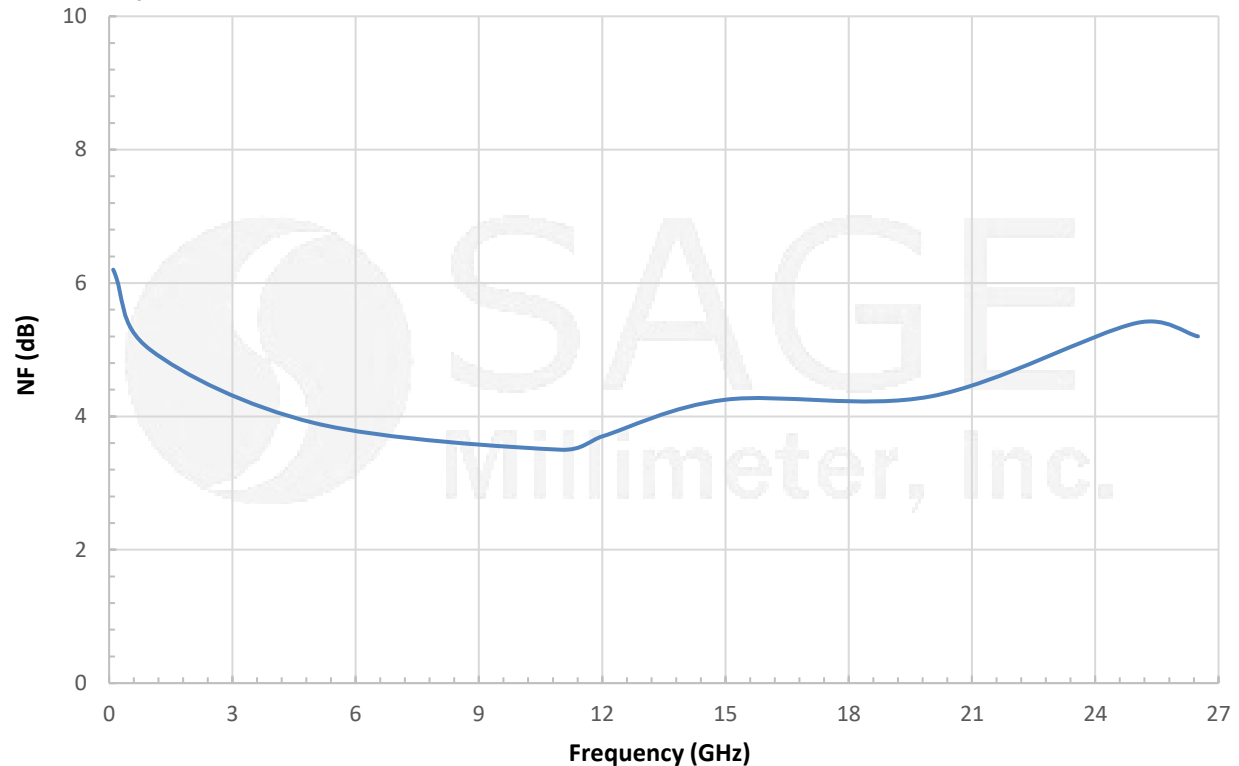

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

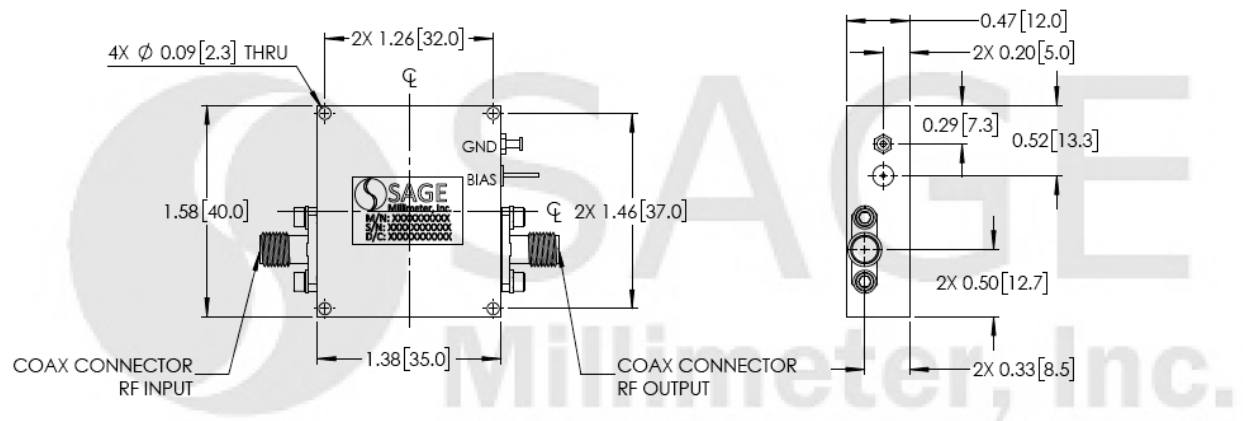

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com



Broadband Amplifier, 0.1 to 26.5 GHz, 38 dB Gain, 12 dBm P_{1dB} , 5 dB NF

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

