

Ka-Band Harmonic Mixer, Keysight Spectrum Analyzer

Description:

Model SFH-KFSFSF-A3-R is a Ka-Band balanced harmonic mixer that is specially designed for use with Keysight's spectrum analyzer series. The mixer employs high performance, GaAs Schottky flip chip diodes and a balanced configuration to produce a superior RF performance. With an IF range of DC to 1.3 GHz, the harmonic mixer uses the harmonic number 8 of a 3.0 to 6.1 GHz LO at +16 dBm to translate 26.5 to 40 GHz. The harmonic mixer has a typical conversion loss of 30 dB.



Features:

- Full Waveguide Band Operation
- No External Bias Required
- Even Harmonic Detection
- Calibrated for 8th Harmonic

Applications:

- Keysight Spectrum Analyzers
- Frequency Meters
- Phase Locked Loops

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
RF Frequency	26.5 GHz		40 GHz
LO Frequency	3.0 GHz		6.1 GHz
IF Frequency	DC		1.3 GHz
Required LO Pumping Power		+16 dBm	+19 dBm
Conversion Loss		30 dB	
Combined Damage RF and LO Power			+20 dBm
Number of Harmonics*		8	
Specification Temperature		+25 °C	
Operation Temperature	-40 °C		+85 °C

*Note: Other even harmonics can be used.

Mechanical Specifications:


Item	Specification
RF Port	K(F)
LO Port	SMA (F)
IF Port	SMA (F)
Case Material	Brass
Finish	Gold Plated
Weight	5.6 Oz
Outline	FH-A2-R




Ka-Band Harmonic Mixer, Keysight Spectrum Analyzer

Typical Conversion Loss vs Frequency

Input Power: +17 dBm

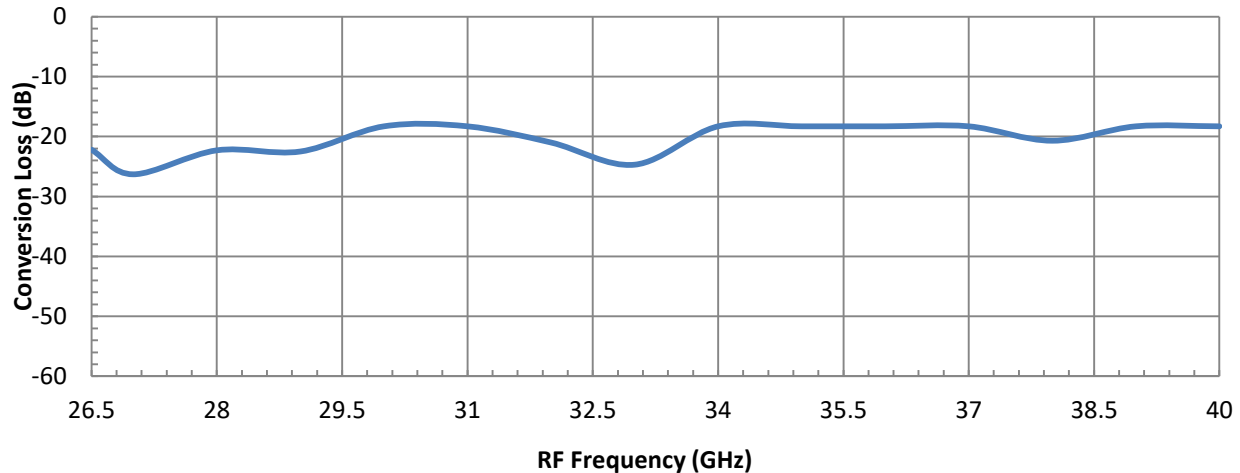

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

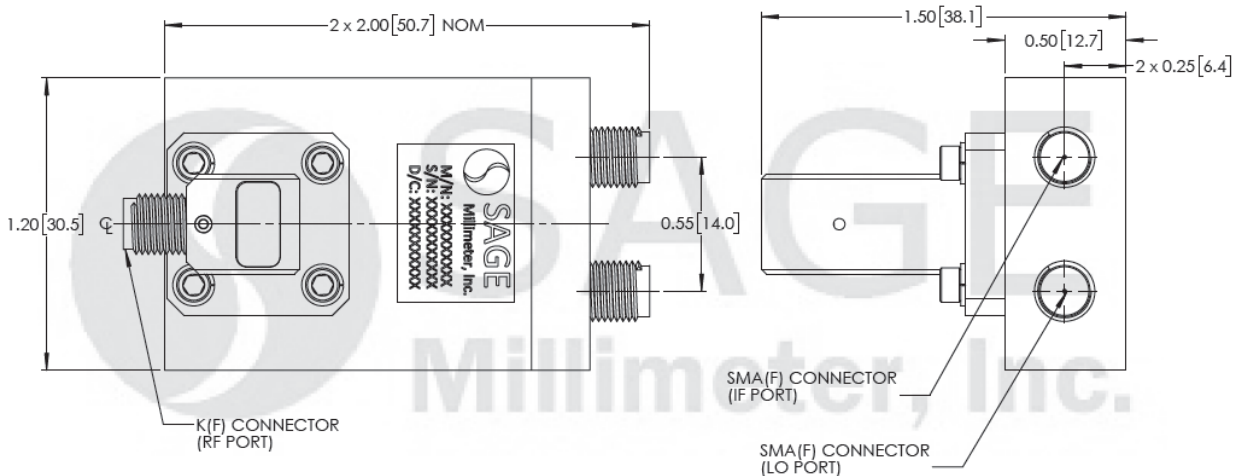

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings of the mixer will damage the device.
- Any foreign objects in the waveguide will cause performance degradation and possible device damage.
- The mixer is a static sensitive device. Always follow ESD rules when working with the mixer.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.92 ± 0.05 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

