


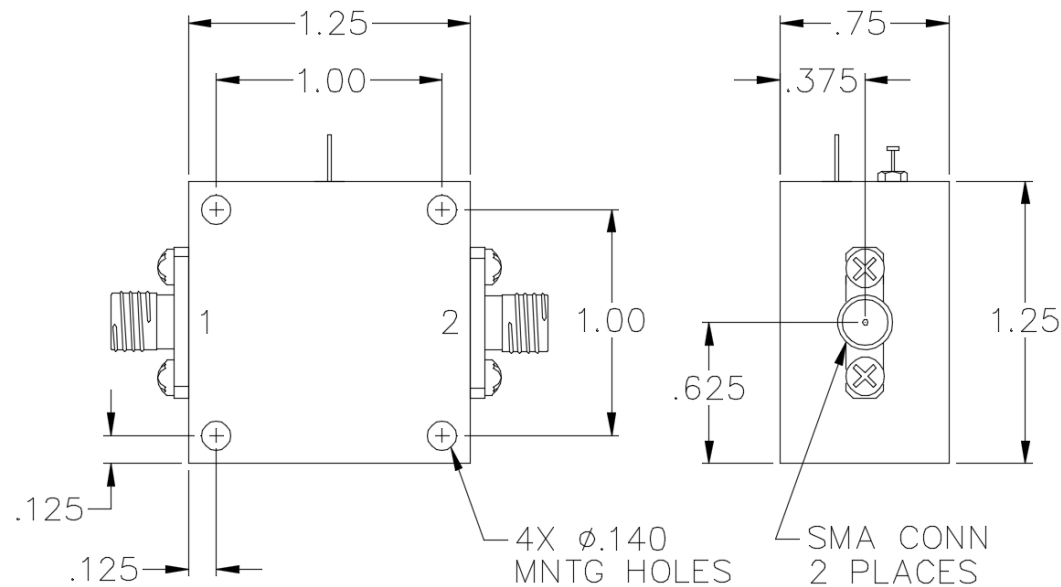

## SPECIFICATIONS

|                        |               |
|------------------------|---------------|
| Frequency Range:       | 10 - 1000 MHz |
| Isolation:             | 25 dB Min     |
| Insertion Loss:        | 1.0 dB Max    |
| Current <sup>1</sup> : | 200 mA Max    |
| Power:                 | 1 Watt Max    |
| Voltage:               | 50 Vdc Max    |
| VSWR:                  | 1.20:1 Max    |

### Notes:

- Higher current and isolation requirements available.

## PIN-OUT TABLE

|                     |                |
|---------------------|----------------|
| RF In (DC Blocked): | 1              |
| RF/DC Output:       | 2              |
| DC In (Bias):       | Feed Thru Pins |
| Ground:             | Housing        |

**PULSAR** MICROWAVE CORPORATION

PULSAR MICROWAVE CORPORATION  
48 INDUSTRIAL WEST, CLIFTON NJ 07012  
TEL: 973-779-6262 FAX: 973-779-2727  
WWW.PULSARMICROWAVE.COM

DESCRIPTION :

**Bias Tee**

MODEL NO. :

**BT-01-410F**

DIMENSIONS ARE IN INCHES  
DECIMAL TOLERANCE:  
2 PLACE ± .02  
3 PLACE ± .010

SIZE  
**A**

CAGE CODE :  
**0HR85**

REV CODE :  
**160108**

SCALE : N / A

ALL SPECIFICATIONS ARE SUBJECT TO  
CHANGE WITHOUT NOTICE AT ANY TIME

SHEET 1 OF 1