


W-Band Mechanically Tuned Gunn Oscillator, ± 1 GHz Tuning Bandwidth

Description:

Model SOM-94302315-10-M1 is a W-Band, mechanically tuned Gunn oscillator that utilizes a high performance GaAs Gunn diode and proprietary cavity design to deliver +15 dBm typical power. The oscillator features a frequency tuning range of 93 to 95 GHz and delivers low AM/FM noise and harmonic emissions. Compared to its counterparts, such as multiplier based sources, the Gunn oscillator is a lower cost and cleaner source. The Gunn oscillator's frequency can also be tuned by varying the bias voltage, which is useful for phase-locking and electrical-tuning applications. The Gunn oscillator is equipped with a micrometer for quick frequency tuning and test bench applications. Models with a self-locking set screw for system integration are available under a different model number. The performance of the oscillator can be further enhanced by adding an optional isolator, Gunn oscillator modulator/regulator and temperature heater.

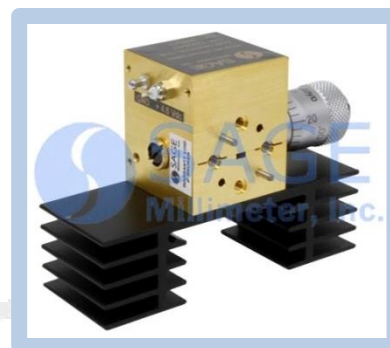

Features:

- Low AM/FM Noise and Harmonics
- Bias Tunable

Applications:

- Test Sources
- Signal Generation
- Lab Test Setups

Electrical Specifications:

| Parameter | Minimum | Typical | Maximum |
|---|---------|----------------------|----------------------|
| Center Frequency | | 94 GHz | |
| Power Output | +13 dBm | +15 dBm | |
| Mechanical Tuning Range* | | ± 1 GHz | |
| Bias Tuning Range (+4.0 to +5.0 V _{DC}) | | ± 100 MHz | |
| Bias Voltage | | +4.5 V _{DC} | +5.5 V _{DC} |
| Bias Current | | 750 mA | |
| Specification Temperature | | +25°C | |
| Operating Temperature | 0°C | | +50°C |

*The mechanical tuning range may be wider.

Mechanical Specifications:


| Item | Specification |
|-------------------|---|
| RF Port | WR-10 Waveguide with UG-387/U-M Anti-Cocking Flange |
| DC Bias | SMA(F) |
| Mechanical Tuning | Micrometer |
| Body Material | Aluminum |
| Finish | Gold Plated |
| Weight | 3.6 Oz |
| Outline | OM-MW-A |




W-Band Mechanically Tuned Gunn Oscillator, ± 1 GHz Tuning Bandwidth

Typical Frequency and Power Output vs. Micrometer Reading

Bias: +4.5 V_{DC}/750 mA

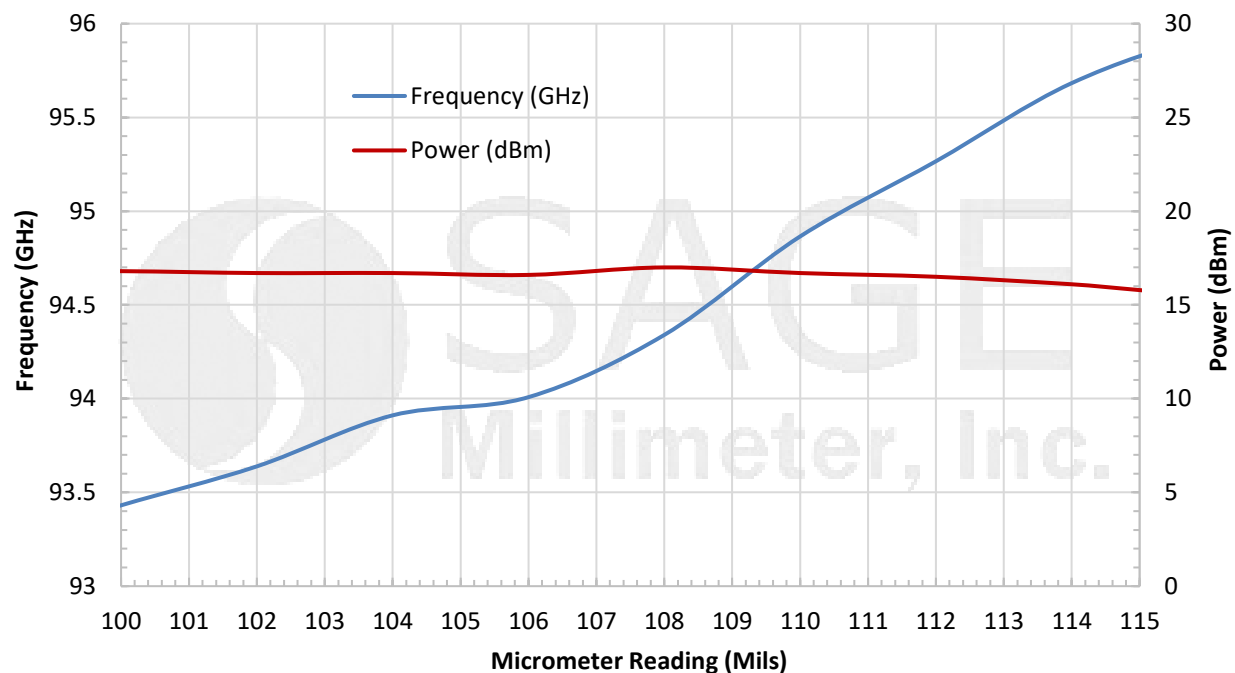

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

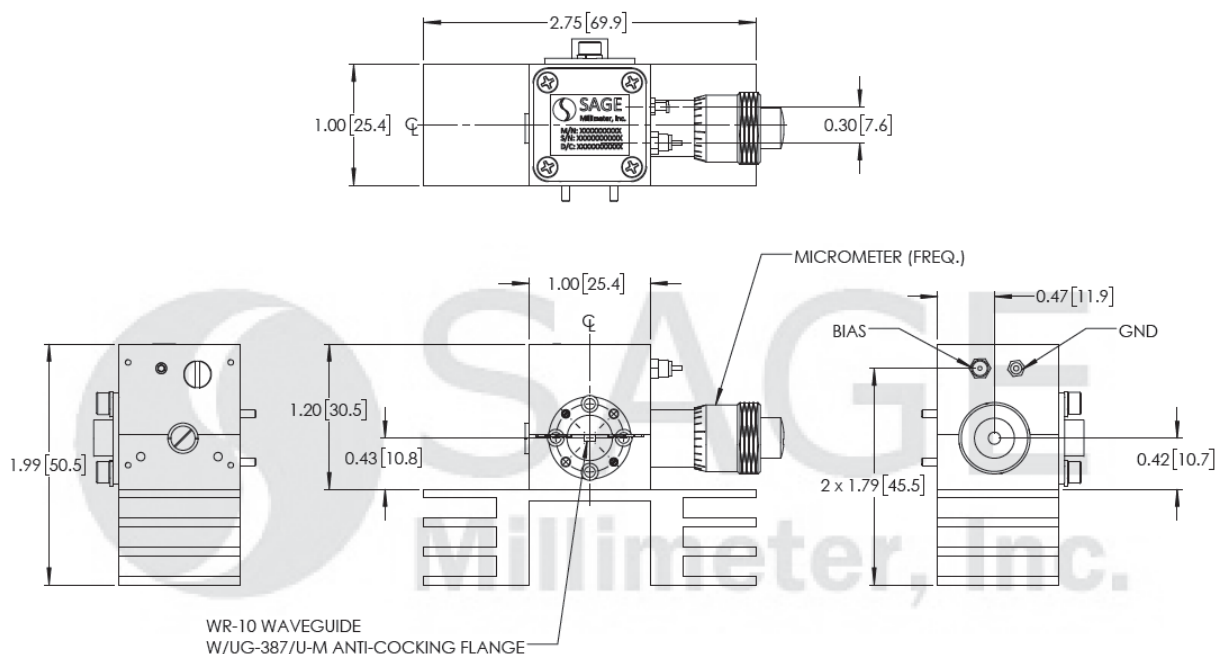

www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com



W-Band Mechanically Tuned Gunn Oscillator, ± 1 GHz Tuning Bandwidth

Note:

- All data is presented using a limited sample lot, actual data may vary unit to unit.
- The data given above was tested under case temperature **35°C**.
- Always set micrometer reading to approximately **94.0 GHz** when turning on the oscillator to avoid wrong mode operation.
- The SAGE Millimeter Gunn oscillator regulator **SOR-R3** is highly recommended for over voltage and reverse bias protection. The outline of the model SOR-R3 is shown in below.
- The bias tuning feature can be used for electrical tuning and phase lock loop applications.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Reversing polarity will destroy the device.
- Bias voltage should never exceed **+5.5 Volts**.
- The case temperature of the device should never exceed **+50°C**. Use an additional heatsink or fan if necessary.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.92 ± 0.05 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**
- Any foreign objects in the waveguide will destroy the device.

Appendix: The Outline of the Gunn Oscillator Regulator Model SOR-R3

