



## 2.92 mm (M) to 2.92 mm (M) Coaxial Cable, Flexible, 60", Phase Matched

### Description:

**Model SCW-KMKM060-F1-PM** is a 60" long, flexible, phase matched coaxial cable with 2.92 (K) mm male connectors that cover the frequency range of DC to 40 GHz. The coaxial cable utilizes high performance material and a precision manufacturing process to guarantee superior microwave performance and mechanical durability. The impedance of the cable is 50 ohms. Other lengths are offered under different models.



### Features:

- High Return Loss
- Low Insertion Loss
- Flexible and Durable

### Applications:

- Test Lab
- Sub-assemblies

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	DC		40 GHz
Insertion Loss @ 18 GHz		< 2.7 dB	
Insertion Loss @ 26.5 GHz		< 3.3 dB	
Insertion Loss @ 32 GHz		< 3.8 dB	
Insertion Loss @ 40 GHz		< 4.2 dB	
Return Loss @ 40 GHz		18 dB	
Impedance		50 Ω	
Phase Match (Unit to Unit)		±10 °	
Breakdown Voltage			1000 Volts
Radiation Shielding		90 dB	
Power Handling @ 40 GHz			20 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C


### Mechanical Specifications:

Item	Specification
Connectors	2.92 mm Male
Connector Contact Material/Plating	Beryllium Copper (BeCu)/Gold Plating Per MIL-G-45204
Connector / Cable Insulation Layer Material	Passivated Stainless Steel / PEEK/PEI
Cable Jacket Material	PFA
Cable Outer Diameter	0.142"
Length	60"
Minimum Bending Radius	0.7"
Repeated Bending Radius	1.418"
Weight	1.1 Oz
Outline	CW-KK-F8




## 2.92 mm (M) to 2.92 mm (M) Coaxial Cable, Flexible, 60", Phase Matched

### Typical Performance vs. Frequency

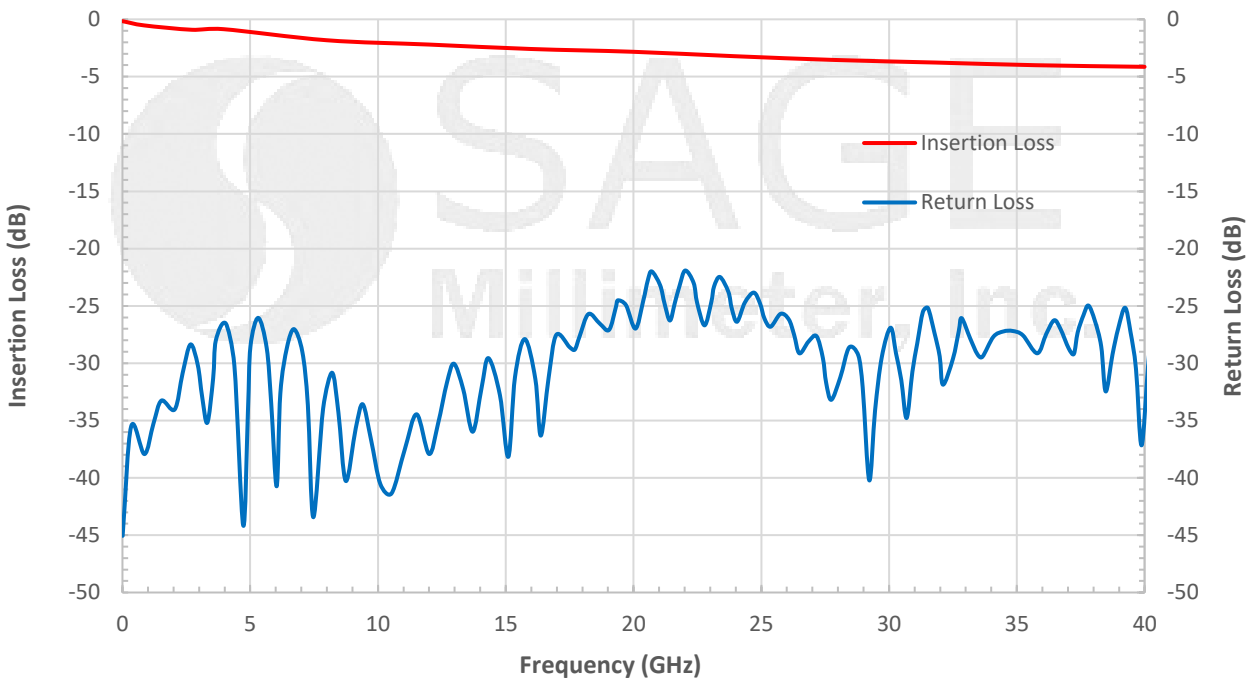

### Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

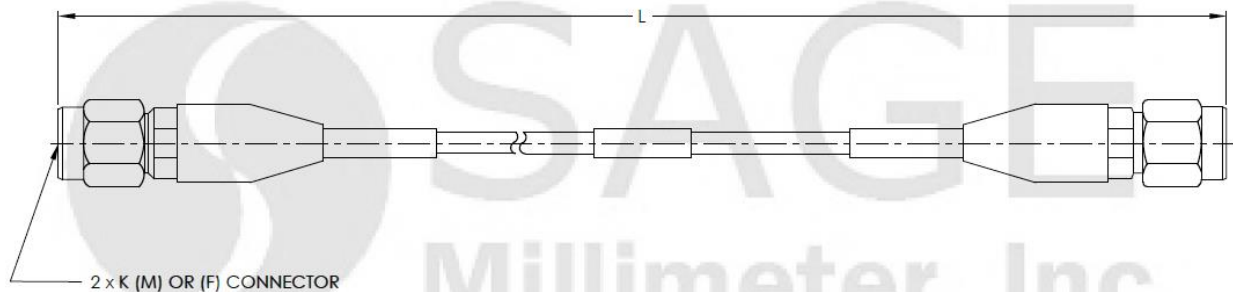

#### Note:

- Length "L" can be customizable.
- All data presented is collected from a sample lot. Actual data may vary unit to unit slightly.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

#### Caution:

- Bending the cable sharply will either cause damage or degrade the performance of the cable.
- Proper torque,  $8.0 \pm 0.15$  inch-pounds ( $0.90 \pm 0.02$  Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-U3, is highly recommended.**

