

## 1.35 mm (M) to 1 mm (M) Coaxial Adapter

### Description:

**Model SCT-EM1M-UB** is a 1.35 mm male to 1 mm male coaxial adapter that covers the frequency range of DC to 90 GHz. This coaxial adapter offers efficient transitioning between the coaxial connectors with a high return loss and typical insertion loss of 0.65 dB. The impedance of the adapter is 50 Ohms. Other configurations are available under different model numbers.



### Features:

- Instrumentation Grade
- High Return Loss
- Low Insertion Loss

### Applications:

- Test Lab
- Sub-assemblies

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	DC		90 GHz
Insertion Loss		0.65 dB	
Return Loss		14 dB	
Impedance		50 Ω	
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

### Mechanical Specifications:


Item	Specification
Connector 1 Type	1.35 mm Male
Connector 2 Type	1 mm Male
Body Material	Stainless Steel
Body Finish	Passivated
Contact Material	Beryllium Copper
Insulator Material	PEI
Weight	0.09 Oz (2.5 Grams)
Length	0.72"
Outline	CT-EM1M-LN1

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505  
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com

## 1.35 mm (M) to 1 mm (M) Coaxial Adapter

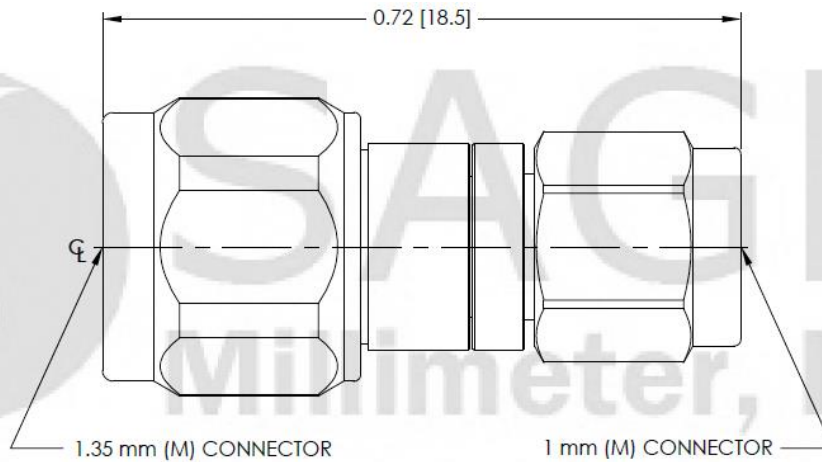

**Note:**

- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

**Caution:**

- Proper torque,  $4.0 \pm 0.15$  inch-pounds ( $0.45 \pm 0.02$  Nm), should be used. **SAGE Millimeter torque wrench, model SCH-06004-S1, is highly recommended.**

