


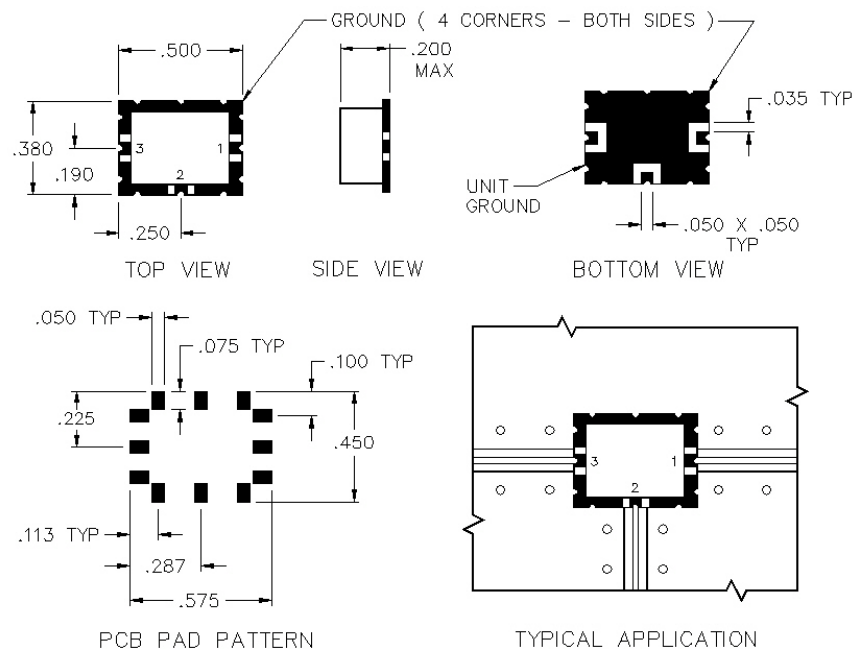

ALL NON-USED PORTS AND UNIT GROUND
SHALL BE GROUND TO THE MAIN BOARD

SPECIFICATIONS

Frequency Range:	800 - 1000 MHz
Isolation:	25 dB Min
Insertion Loss:	0.5 dB Max
Current ¹ :	1000 mA Max
Power:	5 Watts Max
Voltage:	50 Vdc Max
VSWR:	1.20:1 Max

Notes:

- Higher current and isolation requirements available.

PIN-OUT TABLE

RF In (DC Blocked):	1
RF/DC Output:	3
DC In (Bias):	2

PULSAR MICROWAVE CORPORATION

PULSAR MICROWAVE CORPORATION
48 INDUSTRIAL WEST, CLIFTON NJ 07012
TEL: 973-779-6262 FAX: 973-779-2727
WWW.PULSARMICROWAVE.COM

DESCRIPTION :

Bias Tee

MODEL NO. :

BT-08-A

DIMENSIONS ARE IN INCHES
DECIMAL TOLERANCE:
2 PLACE $\pm .02$
3 PLACE $\pm .010$

SIZE
A

CAGE CODE :
0HR85

REV CODE :

SCALE : N / A

ALL SPECIFICATIONS ARE SUBJECT TO
CHANGE WITHOUT NOTICE AT ANY TIME

SHEET 1 OF 1