

Ka-Band Waveguide to Coax Panel Mount Adapter, End Launch

Description:

Models SWC-28KF-E1-WR and SWC-28KM-E1-WR are end launch (180°) Ka-Band waveguide to coax panel mount adapters that cover the frequency range of 26.5 to 40 GHz. They are designed and manufactured for panel mount instrumentation applications and allow for an efficient transition between the rectangular waveguide and 2.92 mm (K) coax connector. These adapters are also specially designed to be weather resistant.



Features:

- Full Waveguide Band Coverage
- Lower Insertion Loss and VSWR
- Instrumentation Grade
- DC Short Circuit
- Weather Resistant

Applications:

- Test Labs
- Instrumentations
- Communication Systems

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	26.5 GHz		40 GHz
Insertion Loss		0.25 dB	
Return Loss		20 dB	
Power Handling			50 W (CW)
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C


Mechanical Specifications:

Item	Specification
Waveguide	WR-28 with UG-599/U Flange with O-Ring
Coaxial	2.92 mm (K) Female for Model Number: SWC-28KF-E1-WR
Coaxial	2.92 mm (K) Male for Model Number: SWC-28KM-E1-WR
Size	1.36" (L) x 1.33" (Ø) for Model Number: SWC-28KF-E1-WR
Size	1.49" (L) x 1.33" (Ø) for Model Number: SWC-28KM-E1-WR
Housing Material	Aluminum
Flange Material	Brass
Finish	Gold Plated
Weight	2.2 Oz
Outline	WC-AE-WR




Ka-Band Waveguide to Coax Panel Mount Adapter, End Launch

Typical Insertion Loss and Return Loss vs. Frequency

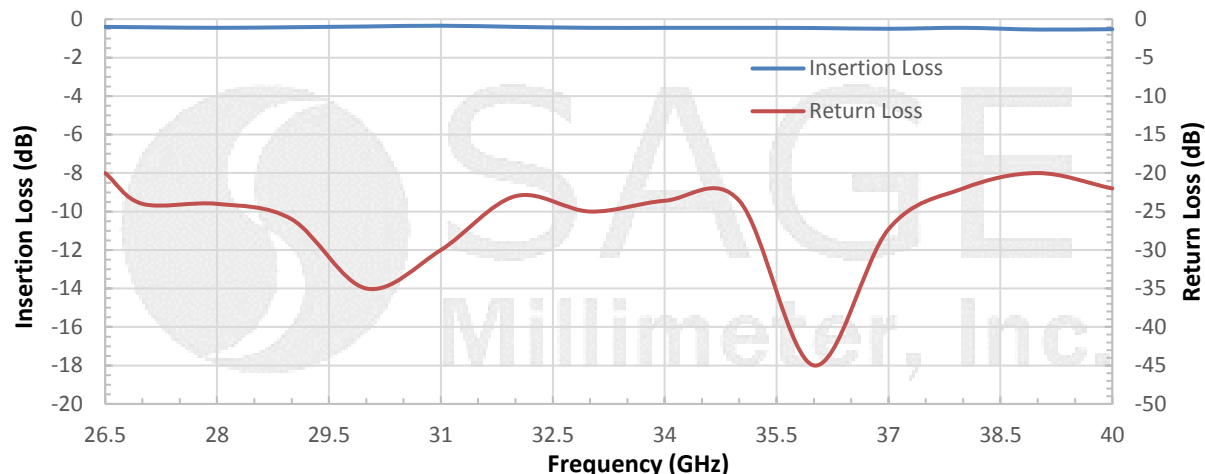

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

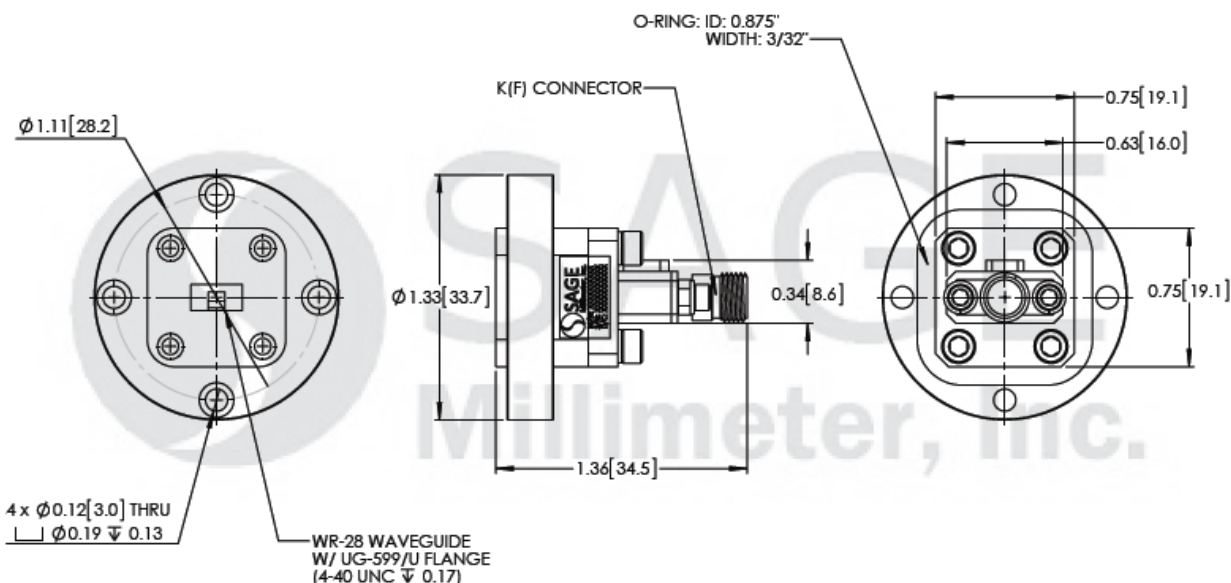

Note:

- All data are presented using a limited sample lot, actual data may vary unit to unit.
- All testing was performed under 25°C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the waveguide will cause performance degradation and may damage the adapter.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.92 ± 0.05 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com