

E-Band Waveguide Directional Coupler, 10 dB

Description:

Model SWD-1030H-12-SW is an E band, three-port waveguide directional coupler that delivers a 10 dB nominal coupling level and 30 dB typical directivity across the full waveguide band from 60 to 90 GHz. The three-port coupler uses H-plane coupling and features a traditional multi-hole and waveguide design to achieve a flat coupling level, high directivity, and low insertion loss. The interfaces of the coupler are WR-12 waveguides with UG-387/U flanges. Custom coupling levels are available under different model numbers.



Features:

- Full Band Operation
- Low Insertion Loss
- Light Weight



Applications:

- Test Labs
- Instrumentations
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	60 GHz		90 GHz
Insertion Loss*		1.0 dB	
Coupling*		10 dB	
Directivity*		30 dB	
VSWR		1.08 : 1	1.1 : 1
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

* The definition of the insertion loss, coupling and directivity is show as following.

<p>Insertion Loss = $-10 \log_{10} [(P2+P3)/P1]$</p> <p>Coupling Value = $-10 \log_{10} [P3/P1]$</p>	
<p>Directivity = $-10 \log_{10} [P3/P1]$</p>	






E-Band Waveguide Directional Coupler, 10 dB

Mechanical Specifications:


Item	Specification
Through Ports	WR-12 Waveguide with UG-387/U Flange
Coupled Port	WR-12 Waveguide with UG-387/U Flange
Coupling Plane	H-Plane
Size	4.72" (L) x 0.75" (W) x 1.36" (H)
Waveguide Material	Copper
Flange Material	Brass
Finish	Black Painted Body; Gold Plated Waveguide Faces
Weight	1.6 Oz
Outline	WD-SWH-E-BX1

Typical Insertion Loss and Coupling vs. Frequency

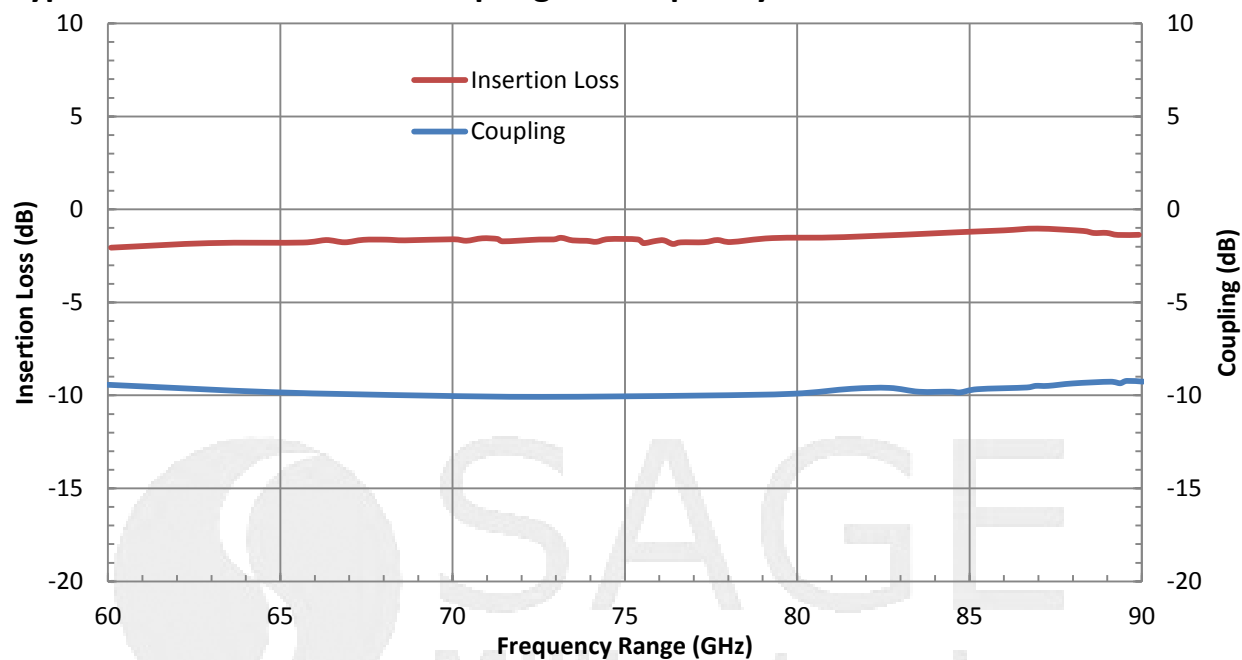

E-Band Waveguide Directional Coupler, 10 dB

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

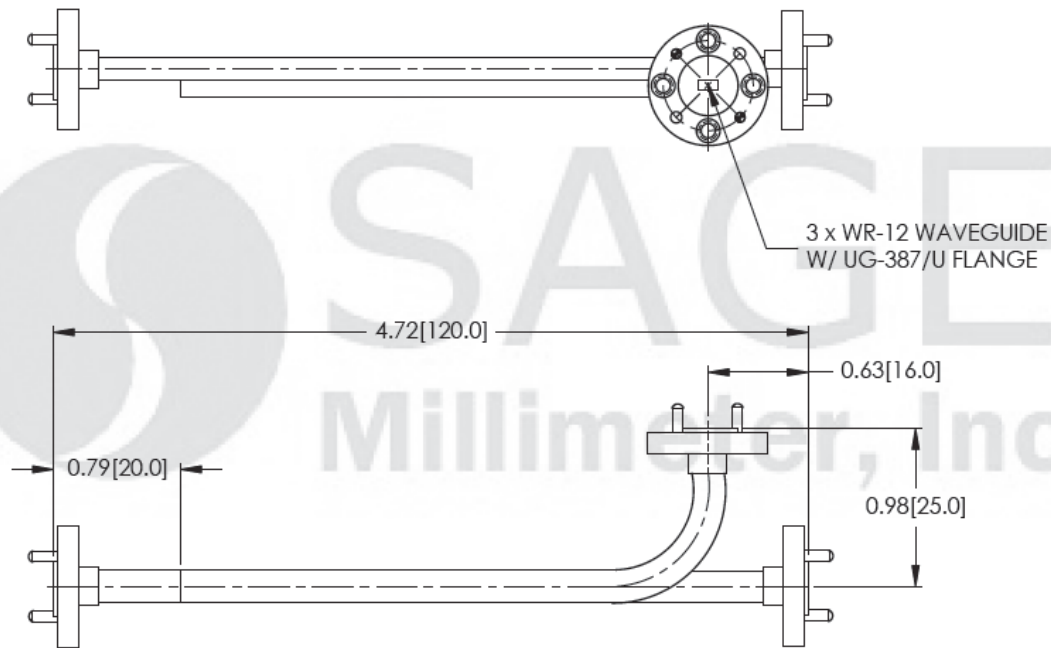

Note:

- All data was presented using a limited sample lot. Actual data may vary unit to unit.
- The insertion loss shown includes the loss due to coupling.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the waveguide will degrade performance and/or damage the device.

