STR-353-28-L1

Rev. 1.0

Radar Target Simulator, Level Setting, 35 GHz

Description:



Model STR-353-28-L1 is a radar doppler simulator that operates at 35 GHz with a bandwidth of ±150 MHz and a WR-28 waveguide input/output. The simulator utilizes a single-sideband-modulator to modulate the incoming signal transmitted by the radar under test and sends back either a higher or lower band signal through a diplexer. The frequency-shifted signal is transmitted back to the radar under test as a Doppler signal. Target characteristics can be adjusted by changing the I and Q channel frequency and phase. The routing attenuation is adjusted by the level setting attenuator which can be calibrated to simulate the radar cross section (RCS).

Features:

- Single Sideband Output
- Simulated Target Speed and Size Adjustable
- Simulated Target Moving Direction Switchable
- Instrumentation Grade

Applications:

- Doppler Target Simulations
- Radar Systems

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Center Frequency		35 GHz	
RF Bandwidth		±150 MHz	
Carrier Rejection		25 dB	
Image Rejection		20 dB	
Routing Loss Range		14 to 70 dB	
I/Q Frequency Range	DC		150 MHz
I/Q Voltage			±10 V_{p-p}
I/Q Current			10 mA
I/Q Phase Error		±5°	
Specification Temperature		+25 ˚C	
Operating Temperature	+0 ˚C		+50 ˚C

Mechanical Specifications:

Item	Specification
RF Port	WR-28 Waveguide with UG-599/U Flange
I/Q Ports	SMA(F)
Size	6.15” (W) x 10.70” (L) x 4.33” (H)
Finish	Black Anodized
Outline	TR-AL


www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com

Copyright © 2017 by SAGE Millimeter, Inc.

SAGE Millimeter, Inc.

Radar Target Simulator, Level Setting, 35 GHz

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

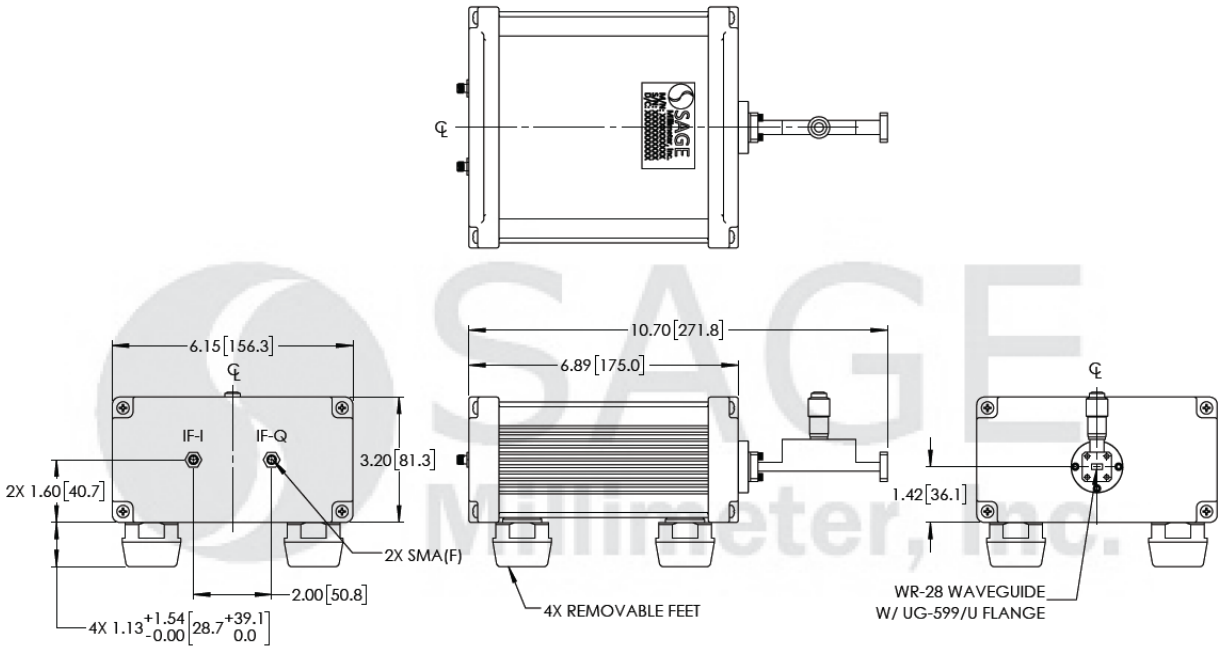

Note:

- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- Models with different operation frequencies are available under a different model numbers.
- A 35 GHz Radar Target Simulator with a **direct reading attenuator**, instead of a level setting attenuator, is available as model **STR-353-42-D1**.

Caution:

- Exceeding absolute maximum ratings of the device will damage the device.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.92 ± 0.05 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.

www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com

Copyright © 2017 by SAGE Millimeter, Inc.

SAGE Millimeter, Inc.