DRV2510-Q1 适用于螺线管和音圈且集成诊断功能的 3A 汽车类触觉驱动器评

1 特性

- 宽工作电压范围 (5V - 18V)
- 集成负载突降保护 (40V)
- 大电流驱动（峰值电流达 3A）
- 低 $R_{DS(on)}$，完整 H 桥输出
- 集成诊断
- 集成故障保护
  - 40V 负载突降保护，符合 ISO-7637-2 标准
  - 短路保护
  - 过热保护
  - 过压和欠压保护
  - 故障报告
- 模拟输入
- I^2C 通信
- 专用中断引脚
- 符合汽车级 (Q100) 标准
- 环境温度范围：–40ºC 至 125ºC

2 应用

- 电磁致动器驱动器
  - 音圈
  - 螺线管
- 机械按钮替代产品
- 汽车类触觉 应用
  - 信息娱乐
  - 中央控制台
  - 方向盘
  - 车门板
  - 座椅

3 说明

DRV2510-Q1 器件是一款专为感性负载（例如，螺线管和音圈）而设计的大电流触觉驱动器。

输出级含一个完整 H 桥，能够提供 3A 峰值电流。

DRV2510-Q1 器件提供欠压闭锁、过流保护和过热保护等多种保护功能。


DRV2510-Q1 器件符合汽车类产品标准。集成的突降保护可降低外部电压钳位组件的成本和尺寸，板载负载诊断会通过数字接口报告致动器状态。

器件信息(1)

器件型号	封装	封装尺寸（标称值）
DRV2510-Q1	HTSSOP (16)	5.00 mm x 4.40 mm

(1) 要了解所有可用封装，请见数据表末尾的可订购产品附录。

简化电路原理图

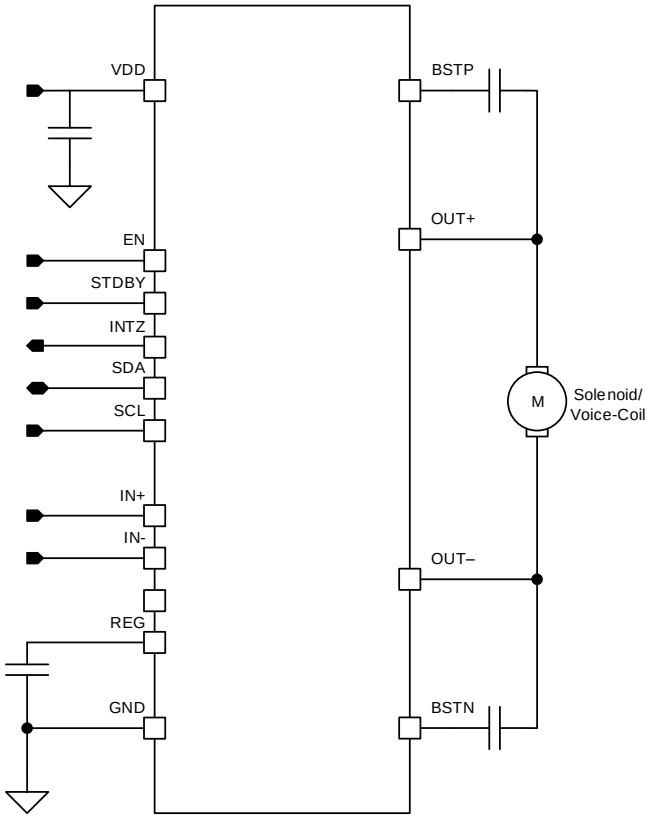

An IMPORTANT NOTICE at the end of this data sheet addresses availability, warranty, changes, use in safety-critical applications, intellectual property matters and other important disclaimers. PRODUCTION DATA.

目录

1 特性 1
2 应用 1
3 说明 1
4 修订历史记录 2
5 Pin Configuration and Functions 3
6 Specifications 4
6.1 Absolute Maximum Ratings 4
6.2 ESD Ratings 4
6.3 Recommended Operating Conditions 4
6.4 Thermal Information 4
6.5 Electrical Characteristics 5
6.6 Timing Requirements 5
6.7 Switching Characteristics 6
6.8 Typical Characteristics 6
7 Detailed Description 7
7.1 Overview 7
7.2 Functional Block Diagram 7
7.3 Feature Description 8
7.4 Device Functional Modes 11
7.5 Programming 11
7.6 Register Map 15
8 Application and Implementation 18
8.1 Application Information 18
8.2 Typical Applications 18
9 Power Supply Recommendations 22
10 Layout 22
10.1 Layout Guidelines 22
10.2 Layout Example 22
11 器件和文档支持 23
11.1 器件支持 23
11.2 商标 23
11.3 静电放电警告 23
11.4 Glossary 23
12 机械、封装和可订购信息 24

4 修订历史记录


注：之前版本的页码可能与当前版本有所不同。

Changes from Original (June 2016) to Revision A	Page
• 发布为量产数据。	1

Copyright © 2016, Texas Instruments Incorporated

5 Pin Configuration and Functions

TWP
HTSSOP 16-Pin With Thermal Pad
Top View

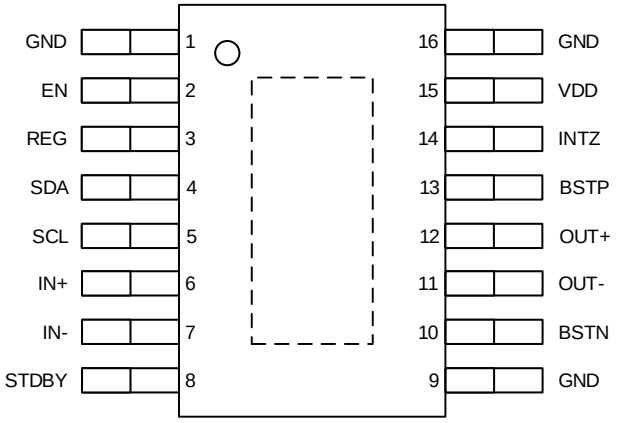

Pin Functions

PIN		TYPE	DESCRIPTION
NAME	NO.		
GND	1, 9, 16	P	Ground.
EN	2	I	Device enable pin.
REG	3	P	Internally generated gate voltage supply. Not to be used as a supply or connected to any component other than a 1 µF X7R ceramic decoupling capacitor and the MODE resistor divider.
SDA	4	I	I^2C data.
SCL	5	I	I^2C clock.
IN+	6	I	Positive differential input.
IN-	7	I	Negative differential input.
STDBY	8	I	Standby pin.
BSTN	10	P	Boot strap for negative output, connect to 220 nF X5R, or better ceramic cap to OUT-.
OUT-	11	O	Negative output.
OUT+	12	O	Positive output.
BSTP	13	P	Boot strap for positive output, connect to 220 nF X5R, or better ceramic cap to OUT+.
INTZ	14	O	General fault reporting. Open drain. INTZ = High, normal operation INTZ = Low, fault condition
VDD	15	P	Power supply.
Thermal Pad		G	Connect to GND for best system performance. If not connected to GND, leave floating.

Copyright © 2016, Texas Instruments Incorporated

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1)

		MIN	MAX	UNIT
Supply voltage	VDD DC supply voltage range	–0.3	30	V
	VDD pulsed supply voltage range. t < 400 ms exposure	–1	40	
	VDD supply voltage ramp rate		15	V/ms
Input voltage, V_I	SCL, SDA, EN	–0.3	5	V
	IN+, IN-, STDBY	–0.3	6.5	
Current	DC current on VDD, GND, OUT+, OUT-	–4	4	A
	Maximum current in all input pins	–1	1	mA
	Maximum sink current for open-drain pins		7	
Operating free-air temperature, T_A		–40	125	°C
Storage temperature range, T_{stg}		–55	150	

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

6.2 ESD Ratings

		VALUE	UNIT
$V_{(ESD)}$ Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins(1)	±3500	V
	Charged device model (CDM), per JEDEC specification JESD22-C101, all pins(2)	±1000	

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
VDD	Supply voltage. VDD.	5		18	V
V_{IH}	High-level input voltage. SDA, SCL, STDBY, EN.	2.1			V
V_{IL}	Low-level input voltage. SDA, SCL, STDBY, EN			0.7	V
V_{OL}	Low-level output voltage			0.4	V
V_{OH}	High-level output voltage	2.4			V
I_{IH}	High-level input current. SDA, SCL, STDBY, EN			50	µA
R_L	Minimum load Impedance		1.5		Ω
C_B	Load capacitance for each bus line (SDA/SCL)			400	pF

6.4 Thermal Information

THERMAL METRIC(1)		DRV2510-Q1 PWP (HTSSOP) {16} PINS	UNIT
$R_{\theta JA}$	Junction-to-ambient thermal resistance	39.4	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	24.9	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	20	°C/W
ψ_{JT}	Junction-to-top characterization parameter	0.6	°C/W
ψ_{JB}	Junction-to-board characterization parameter	19.8	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	2	°C/W

(1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report, SPRA953.

Copyright © 2016, Texas Instruments Incorporated

6.5 Electrical Characteristics

T_A = 25°C, AVCC = VDD = 12 V, R_L = 5 Ω (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
$\lvert V_{OS} \rvert$	Output offset voltage (measured differentially)	V_I = 0 V, Gain = 20 dB	–25		25	mV
I_{VDD}	Quiescent supply current	No load or filter		16		mA
$I_{VDD(SD)}$	Quiescent supply current in shutdown mode	No load or filter		5	20	µA
$I_{VDD(STDBY)}$	Quiescent supply current in standby mode	No load or filter		7		mA
$r_{DS(on)}$	Drain-source on-state resistance, measured pin to pin	T_J = 25°C		180		mΩ
G	Gain	$P_{(o)}$ = 1 W	19	20	21	dB
			25	26	27	
			31	32	33	dB
			35	36	37	
V_{REG}	Regulator voltage		6.4	6.9	7.4	V
V_O	Output voltage (measured differentially)			20		V
PSRR	Power supply ripple rejection	VDD = 12 V + 1 Vrms at 1 kHz		75		dB
V_{ICMIN}	Input common-mode min			0.3		V
V_{ICMAX}	Input common-mode max			4.4		
CMRR	Common-mode rejection ratio	f = 1 kHz, 100 mVrms referenced to GND. Gain = 20 dB		63		dB
f_{OSC}	Oscillator frequency (with PWM duty cycle < 96%)			400		kHz
				500		
	Output resistance in shutdown			10		MΩ
	Resistance to detect a short from OUT pin(s) to VDD or GND				200	Ω
	Open-circuit detection threshold		75	95	120	Ω
	Short-circuit detection threshold		0.9	1.2	1.5	Ω
	Power-on threshold			4.1		V
	Thermal trip point			150		°C
	Thermal hysteresis			15		°C
	Over-current trip point			3.5		A
	Over-voltage trip point			21		V
	Over-voltage hysteresis			0.6		V
	Under-voltage trip point			4		V
	Under-voltage hysteresis			0.25		V

6.6 Timing Requirements

T_A = 25 °C, V_{DD} = 3.6 V (unless otherwise noted)

		MIN	NOM	MAX	UNIT
$f_{(SCL)}$	Frequency at the SCL pin with no wait states			400	kHz
$t_{w(H)}$	Pulse duration, SCL high	0.6			µs
$t_{w(L)}$	Pulse duration, SCL low	1.3			µs
$t_{su(1)}$	Setup time, SDA to SCL	100			ns
$t_{h(1)}$	Hold time, SCL to SDA	300			ns
$t_{(BUF)}$	Bus free time between stop and start condition	1.3			µs
$t_{su(2)}$	Setup time, SCL to start condition	0.6			µs
$t_{h(2)}$	Hold time, start condition to SCL	0.6			µs
$t_{su(3)}$	Setup time, SCL to stop condition	0.6			µs

Copyright © 2016, Texas Instruments Incorporated

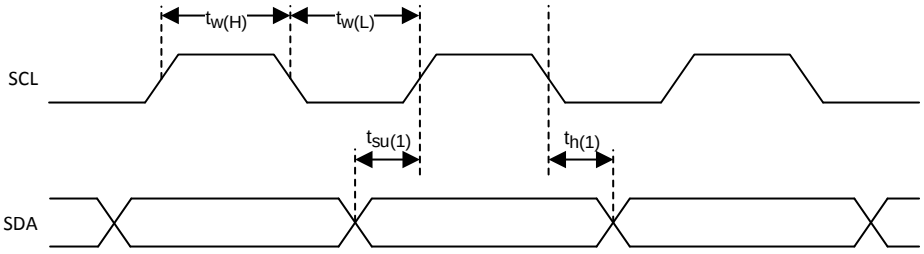


Figure 1. SCL and SDA Timing

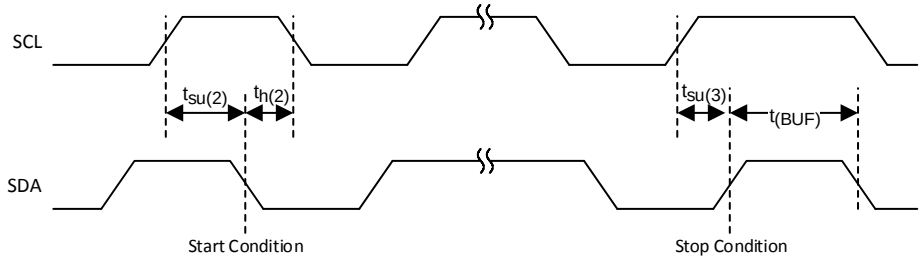


Figure 2. Timing for Start and Stop Conditions

6.7 Switching Characteristics

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{on-sd}	Turn-on time from shutdown to waveform	EN = Low to High, STBY = Low		229		ms
t_{OFF-sd}	Turn-off time	EN = High to Low		47		µs
$t_{on-stdby}$	Turn-on time from standby to waveform	EN = High, STBY = High to Low		32		µs

6.8 Typical Characteristics

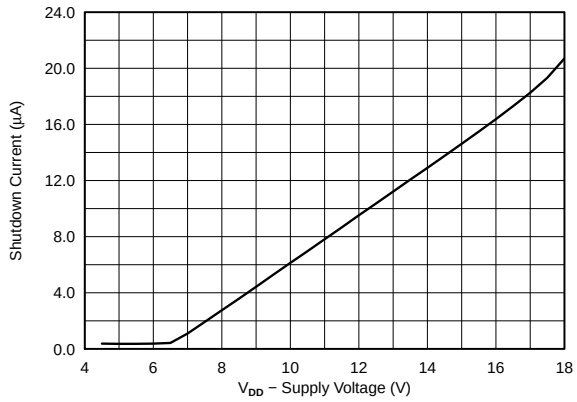


图 3. Shutdown Current vs VDD Voltage

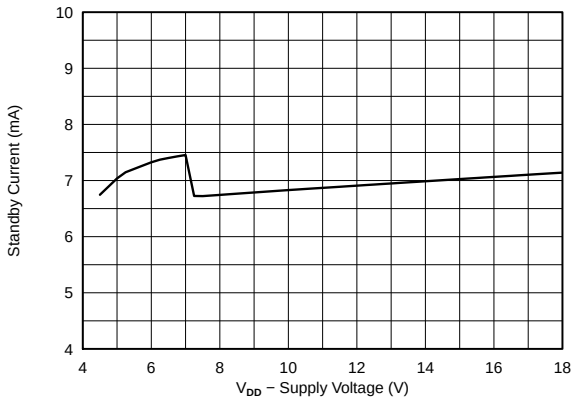


图 4. Standby Current vs VDD Voltage

版权 © 2016, Texas Instruments Incorporated

7 Detailed Description

7.1 Overview


The DRV2510-Q1 device is a high current haptic driver specifically designed for inductive loads, such as solenoids and voice coils.

The output stage consists of a full H-bridge capable of delivering 3 A of peak current.

The design uses an ultra-efficient switching output technology developed by Texas Instruments, but with features added for the automotive industry. The DRV2510-Q1 device provides protection functions such as undervoltage lockout, over-current protection and over-temperature protection. This technology allows for reduced power consumption, reduced heat, and reduced peak currents in the electrical system.

The DRV2510-Q1 device is automotive qualified. The integrated load-dump protection reduces external voltage clamp cost and size, and the onboard load diagnostics report the status of the actuator through the digital interface.

7.2 Functional Block Diagram

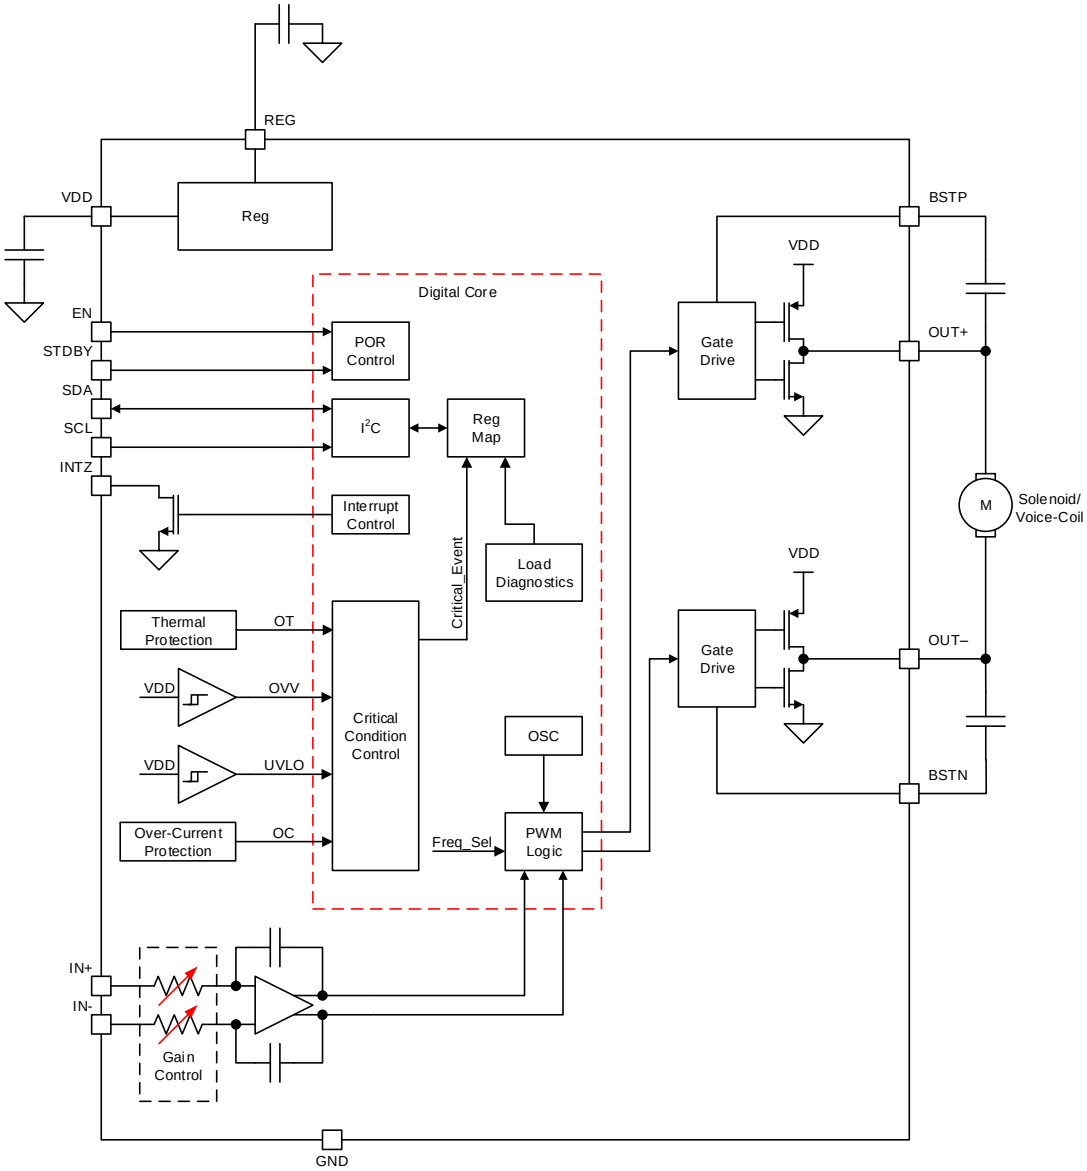

7.3 Feature Description

7.3.1 Analog Input and Configurable Pre-amplifier

The DRV2510-Q1 device features a differential input stage that cancels common-mode noise that appears on the inputs. The DRV2510-Q1 device also features four gain settings that are configurable via I^2C. Please see the Programming Sections for register locations.

表 1. Gain Configuration Table

GAIN	INPUT IMPEDANCE
20 dB	60 kΩ
26 dB	30 kΩ
32 dB	15 kΩ
36 dB	9 kΩ

7.3.2 Pulse-Width Modulator (PWM)

The DRV2510-Q1 device features BD modulation scheme with high bandwidth, low noise, low distortion, and excellent stability.

The BD modulation scheme allows for smaller ripple currents through the load. Each output switches from 0 V to the supply voltage. With no input, the OUT+ and OUT- pins are in phase with each other so that there is little or no current in the load. For positive differential inputs, the duty cycle of OUT+ is greater than 50% and the duty cycle of OUT- is lower than 50% for a positive differential output voltage. The opposite is true for negative differential inputs. The voltage accross the load sits at 0 V throughout most of the switching period, reducing the switching current, which reduces the I^2R losses in the load.

版权 © 2016, Texas Instruments Incorporated

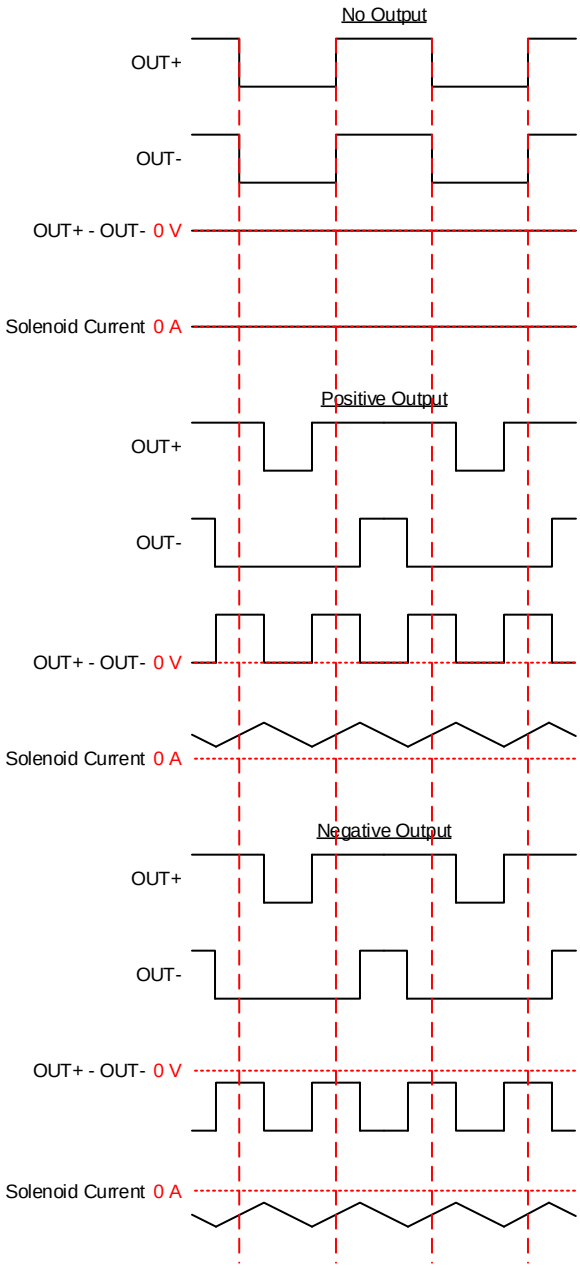


图 5. BD Mode Modulation

7.3.3 Designed for low EMI

The DRV2510-Q1 device design has minimal parasitic inductances due to the short leads on the package. This dramatically reduces EMI that results from current passing from the die to the system PCB. The design incorporates circuitry that optimizes output transitions that causes EMI. Follow the recommended design requirements in the *Design Requirements* section.

7.3.4 Device Protection Systems

The DRV2510-Q1 device features a complete set of protection circuits carefully designed to protect the device against permanent failures due to shorts, over-temperature, over-voltage, and under-voltage scenarios. The INTZ pin signals if an error is detected.

Additionally, the DRV2510-Q1 device is not damaged by adjacent pin to pin shorts.

版权 © 2016, Texas Instruments Incorporated

表 2. Fault Reporting Table

FAULT	TRIGGERING CONDITION	INTZ	ACTION
Over-current	Output short or short to VDD or GND	pulled low	output in high impedance. I^2 updated.
Over-temperature	T_j > 150 ºC	pulled low	output in high impedance. Recovery is automatic once the temperature returns to a safe level.
Under-voltage	VDD < 4 V	pulled low	output in high impedance. I^2 reset.
Over-voltage	VDD > 21 V	pulled low	output in high impedance. I^2 updated.

7.3.4.1 Diagnostics

The device incorporates load diagnostic circuitry designed for detecting and determining the status of output connections. The device supports the following diagnostics:

- Short to GND
- Short to VDD
- Short across load
- Open load

The device reports the presence of any of the short or open conditions to the system via I^2C register read.

1. **Load Diagnostics**—The load diagnostic function runs on de-assertion of EN or when the device is in a fault state (dc detect, overcurrent, overvoltage, undervoltage, and overtemperature). During this test, the outputs are in a Hi-Z state. The device determines whether the output is a short to GND, short to VDD, open load, or shorted load. The load diagnostic biases the output, which therefore requires limiting the capacitance value for proper functioning. The load diagnostic test takes approximately 229 ms to run. Note that the *check* phase repeats up to five times if a fault is present or a large capacitor to GND is present on the output. On detection of an open load, the output still operates. On detection of any other fault condition, the output goes into a Hi-Z state, and the device checks the load continuously until removal of the fault condition. After detection of a normal output condition, the output starts. The load diagnostics run after every other overvoltage (OV) event. The load diagnostic for open load only has I^2C reporting. All other faults have I^2C and INTZ pin assertion.

   The device performs load diagnostic tests as shown in 图 6.
   图 7 illustrates how the diagnostics determine the load based on output conditions.

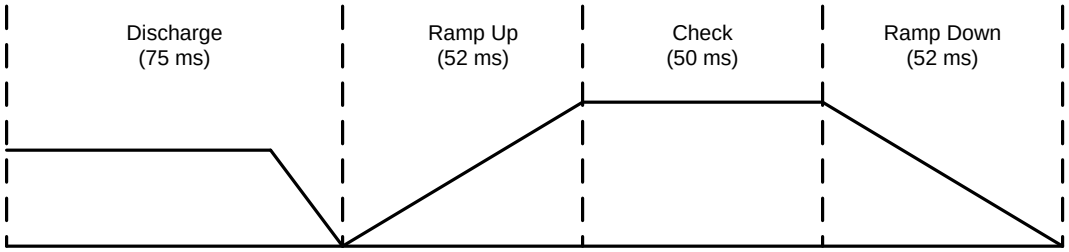


图 6. Load Diagnostics Sequence of Events

版权 © 2016, Texas Instruments Incorporated

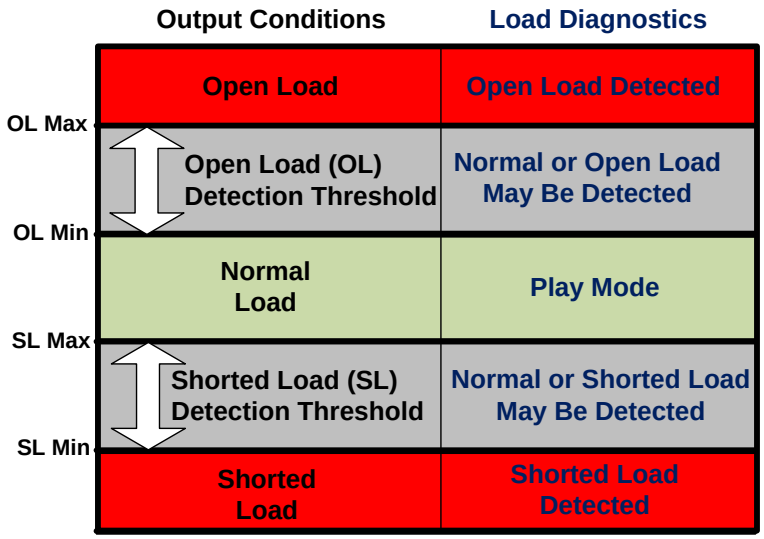


图 7. Load Diagnostic Reporting Thresholds

2. **Faults During Load Diagnostics**—If the device detects a fault (overtemperature, overvoltage, undervoltage) during the load diagnostics test, the device exits the load diagnostics, which may result in a small transient on the output.

7.4 Device Functional Modes

The DRV2510-Q1 device has multiple power states to optimize power consumption.

7.4.1 Operation in Shutdown Mode

The NRST pin of the DRV2510-Q1 device puts the device in a shutdown mode. When NRST is asserted (logic low), all internal blocks of the device are off to achieve ultra low power. I^2C is not operational in this mode and the output is in Hi-Z state.

7.4.2 Operation in Standby Mode

The STDBY pin of the DRV2510-Q1 device puts the device in a standby mode. When STDBY is asserted (logic high), some internal blocks of the device are off to achieve low power while preserving the ability to wake up quickly to achieve low latency waveform playback.

7.4.3 Operation in Active Mode

The DRV2510-Q1 device is in active mode when it has a valid supply, and it is not in either shutdown or standby modes. In this mode the DRV2510-Q1 device is fully on and reproducing at the output the input times the gain.

7.5 Programming

7.5.1 General I^2C Operation

The I^2C bus employs two signals, SDA (data) and SCL (clock), to communicate between integrated circuits in a system. The bus transfers data serially, one bit at a time. The 8-bit address and data bytes are transferred with the most-significant bit (MSB) first. In addition, each byte transferred on the bus is acknowledged by the receiving device with an acknowledge bit. Each transfer operation begins with the master device driving a start condition on the bus and ends with the master device driving a stop condition on the bus. The bus uses transitions on the data pin (SDA) while the clock is at logic high to indicate start and stop conditions. A high-to-low transition on the SDA signal indicates a start, and a low-to-high transition indicates a stop. Normal data-bit transitions must occur within the low time of the clock period. 图 8 shows a typical sequence. The master device generates the 7-bit

Programming (接下页)

slave address and the read-write (R/W) bit to start communication with a slave device. The master device then waits for an acknowledge condition. The slave device holds the SDA signal low during the acknowledge clock period to indicate acknowledgment. When the acknowledgment occurs, the master transmits the next byte of the sequence. Each device is addressed by a unique 7-bit slave address plus a R/W bit (1 byte). All compatible devices share the same signals through a bidirectional bus using a wired-AND connection.

The number of bytes that can be transmitted between start and stop conditions is not limited. When the last word transfers, the master generates a stop condition to release the bus. 图 8 shows a generic data-transfer sequence.

Use external pull-up resistors for the SDA and SCL signals to set the logic-high level for the bus. Pull-up resistors between 660 Ω and 4.7 kΩ are recommended. Do not allow the SDA and SCL voltages to exceed the DRV2510-Q1 supply voltage, V_{DD}.

注

The DRV2510-Q1 slave address is 0x6C (7-bit), or 1101100 in binary.

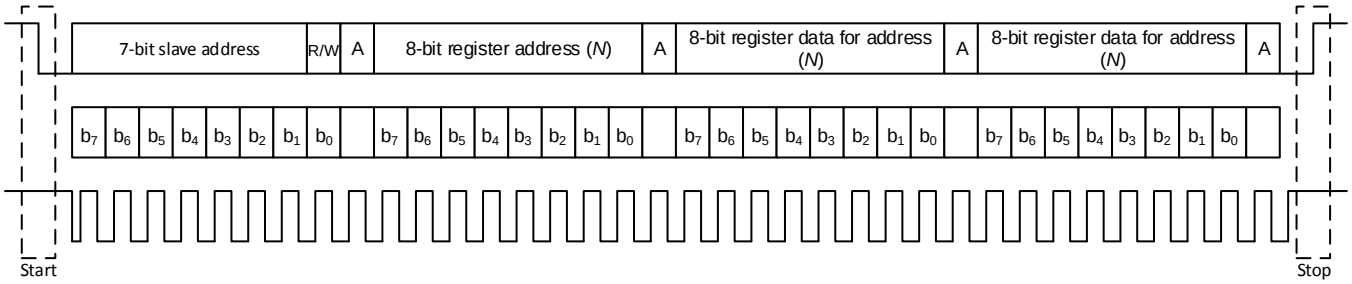


图 8. Typical I^2C Sequence

The DRV2510-Q1 device operates as an I^2C-slave 1.8-V logic thresholds, but can operate up to the V_{DD} voltage. The device address is 0x5A (7-bit), or 1011010 in binary which is equivalent to 0xB4 (8-bit) for writing and 0xB5 (8-bit) for reading.

7.5.2 Single-Byte and Multiple-Byte Transfers

The serial control interface supports both single-byte and multiple-byte R/W operations for all registers.

During multiple-byte read operations, the DRV2510-Q1 device responds with data one byte at a time and begins at the signed register. The device responds as long as the master device continues to respond with acknowledges.

The DRV2510-Q1 supports sequential I^2C addressing. For write transactions, a sequential I^2C write transaction has taken place if a register is issued followed by data for that register as well as the remaining registers that follow. For I^2C sequential-write transactions, the register issued then serves as the starting point and the amount of data transmitted subsequently before a stop or start is transmitted determines how many registers are written.

7.5.3 Single-Byte Write

As shown in 图 9, a single-byte data-write transfer begins with the master device transmitting a start condition followed by the I^2C device address and the read-write bit. The read-write bit determines the direction of the data transfer. For a write-data transfer, the read-write bit must be set to 0. After receiving the correct I^2C device address and the read-write bit, the DRV2510-Q1 responds with an acknowledge bit. Next, the master transmits the register byte corresponding to the DRV2510-Q1 internal-memory address that is accessed. After receiving the register byte, the device responds again with an acknowledge bit. Finally, the master device transmits a stop condition to complete the single-byte data-write transfer.

版权 © 2016, Texas Instruments Incorporated

Programming (接下页)

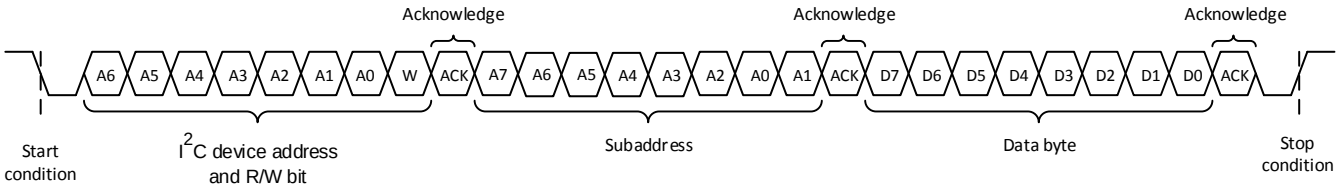


图 9. Single-Byte Write Transfer

7.5.4 Multiple-Byte Write and Incremental Multiple-Byte Write

A multiple-byte data write transfer is identical to a single-byte data write transfer except that multiple data bytes are transmitted by the master device to the DRV2510-Q1 device as shown in 图 10. After receiving each data byte, the DRV2510-Q1 device responds with an acknowledge bit.

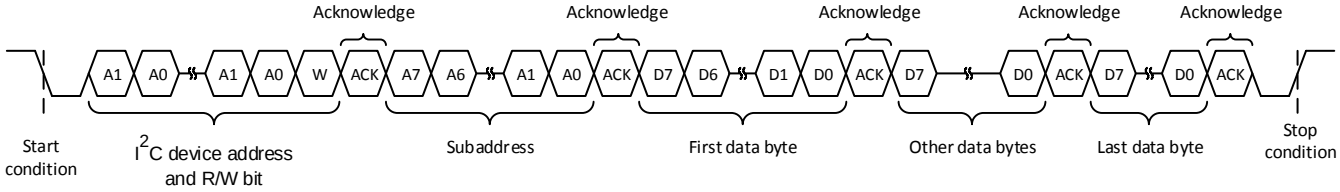


图 10. Multiple-Byte Write Transfer

7.5.5 Single-Byte Read

图 11 shows that a single-byte data-read transfer begins with the master device transmitting a start condition followed by the I^2C device address and the read-write bit. For the data-read transfer, both a write followed by a read actually occur. Initially, a write occurs to transfer the address byte of the internal memory address to be read. As a result, the read-write bit is set to 0.

After receiving the DRV2510-Q1 address and the read-write bit, the DRV2510-Q1 device responds with an acknowledge bit. The master then sends the internal memory address byte, after which the device issues an acknowledge bit. The master device transmits another start condition followed by the DRV2510-Q1 address and the read-write bit again. On this occasion, the read-write bit is set to 1, indicating a read transfer. Next, the DRV2510-Q1 device transmits the data byte from the memory address that is read. After receiving the data byte, the master device transmits a not-acknowledge followed by a stop condition to complete the single-byte data read transfer. See the note in the *General I^2C Operation* section.

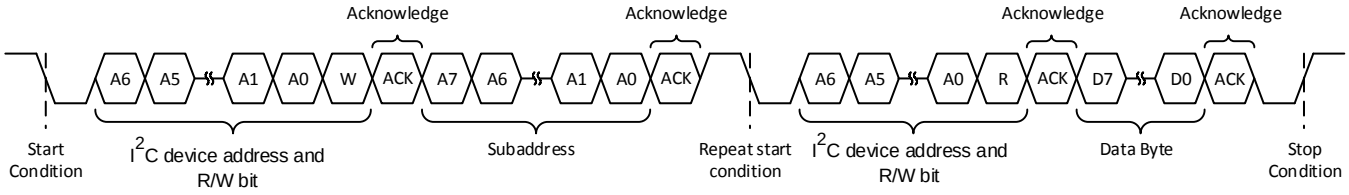


图 11. Single-Byte Read Transfer

7.5.6 Multiple-Byte Read

A multiple-byte data-read transfer is identical to a single-byte data-read transfer except that multiple data bytes are transmitted by the DRV2510-Q1 device to the master device as shown in 图 12. With the exception of the last data byte, the master device responds with an acknowledge bit after receiving each data byte.

Programming (接下页)

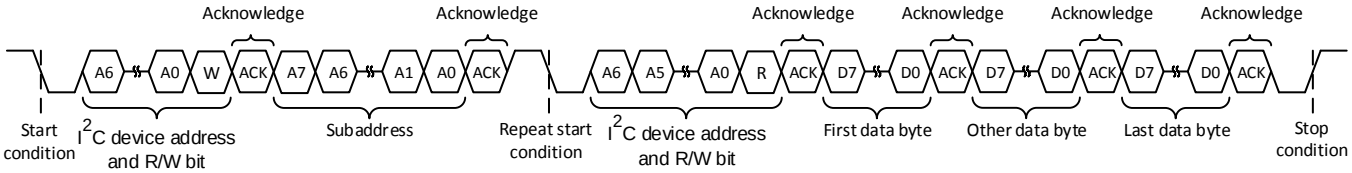


图 12. Multiple-Byte Read Transfer

Copyright © 2016, Texas Instruments Incorporated

7.6 Register Map

Table 3. Register Map Overview

REG NO.	DEFAULT	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
0x00	0x00	Reserved					LOAD_DIAG	Reserved	
0x01	0x00	OVER_TEMP	Reserved	OVER_VOLT	UNDER_VOLT	OVER_CURR	Reserved		
0x02	0x00	DEV_ACTIVE	STDBY	DIAG_ACTIVE	FAULT	LOAD_SHORT	LOAD_OPEN	LOAD_SHORT_GND	LOAD_SHORT_VDD
0x03	0x00	GAIN[1:0]		Reserved					FREQ_SEL

7.6.1 Address: 0x00

Figure 13. 0x00

7	6	5	4	3	2	1	0
Reserved					LOAD_DIAG[0]	Reserved	
RO-0							

Table 4. Address: 0x00

BIT	FIELD	TYPE	DEFAULT	DESCRIPTION
7-3	Reserved			
2	LOAD_DIAG	RO	0	Shows the status of the load diagnostics.
				0 An open or short has not been detected.
				1 An open or short was detected.
1-0	Reserved			

7.6.2 Address: 0x01

Figure 14. 0x01

7	6	5	4	3	2	1	0
OVER_TEMP[0]	Reserved	OVER_VOLT[0]	UNDER_VOLT[0]	OVER_CURR[0]	Reserved		
RO-0		RO-0	RO-0	RO-0			

Table 5. Address: 0x01

BIT	FIELD	TYPE	DEFAULT	DESCRIPTION
7	OVER_TEMP	RO	0	Shows the current statuts of the thermal protection
				0 Temperature is below the over-temperature threshold.
				1 Temperature is above the over-temperature threshold.
6	Reserved			
5	OVER_VOLT	RO	0	Shows the status of the over-voltage protection.
				0 VDD voltage is below the over-voltage threshold.
				1 VDD voltage is above the over-voltage threshold.
4	UNDER_VOLT	RO	0	Shows the status of the under-voltage protection.
				0 VDD voltage is above the under-voltage threshold.
				1 VDD voltage is below the under-voltage threshold.
3	OVER_CURR	RO	0	Shows the status of the over-current protection.
				0 An over-current event has not occured.
				1 Device shutdown due to over-current.
2-0	Reserved			

Copyright © 2016, Texas Instruments Incorporated

7.6.3 Address: 0x02

Figure 15. 0x02

7	6	5	4	3	2	1	0
DEV_ACTIVE[0]	STDBY[0]	DIAG_ACTIVE[0]	FAULT[0]	LOAD_SHORT[0]	LOAD_OPEN[0]	LOAD_SHORT_GND[0]	LOAD_SHORT_VDD[0]
RO-0	RO-0	RO-0	RO-0	RO-0	RO-0	RO-0	RO-0

Table 6. Address: 0x02

BIT	FIELD	TYPE	DEFAULT	DESCRIPTION
7	DEV_ACTIVE	RO	0	Shows the device status (active or shutdown).
				0 Device is shutdown.
				1 Device is active.
6	STDBY	RO	0	Shows the device standby status.
				0 Device is not on standby.
				1 Device is on standby.
5	DIAG_ACTIVE	RO	0	Shows the status of the diagnositcs engine.
				0 Not performing load diagnostics.
				1 Performing load diagnostics.
4	FAULT	RO	0	Shows if a fault has occured on the system. Either over-voltage, under-voltage, over-current, over-temperature.
				0 No fault has occured.
				1 A fault has occured.
3	LOAD_SHORT	RO	0	Shows whether the output is shorted.
				0 OUT+ is not shorted to OUT-.
				1 OUT+ is shorted to OUT-.
2	LOAD_OPEN	RO	0	Shows whether the output has a proper load connected.
				0 A proper load is connected between OUT+ and OUT-.
				1 There is an open connection between OUT+ and OUT-.
1	LOAD_SHORT_GND	RO	0	Shows whether the output is shorted to GND.
				0 Output is not shorted to GND.
				1 Either OUT+ or OUT- is shorted to GND.
0	LOAD_SHORT_VDD	RO	0	Shows whether the output is shorted to VDD.
				0 Output is not shorted to VDD.
				1 Either OUT+ or OUT- is shorted to VDD.

Copyright © 2016, Texas Instruments Incorporated

7.6.4 Address: 0x03

Figure 16. 0x03

7	6	5	4	3	2	1	0
GAIN[1:0]		Reserved					FREQ_SEL[0]
R/W-0	R/W-0						R/W-0

Table 7. Address: 0x03

BIT	FIELD	TYPE	DEFAULT	DESCRIPTION
7-6	GAIN[1:0]	R/W	0	Sets the gain of the driver.
				0 20 dB.
				1 26 dB.
				2 32 dB.
				3 36 dB.
5-1	Reserved			
0	FREQ_SEL	R/W	0	Sets the output frequency.
				0 400 kHz.
				1 500 kHz.

版权 © 2016, Texas Instruments Incorporated

8 Application and Implementation

注

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

8.1 Application Information

The DRV2510-Q1 device is a high-efficiency driver for inductive loads, such as solenoids and voice-coils. The typical use of the device is on haptic applications where short, strong waveforms are desired to create a haptic event that will be coming from the application processor.

8.2 Typical Applications

8.2.1 Single-Ended Source

To use the DRV2510-Q1 with a single-ended source, apply either a voltage divider to bias INB to 3 V, tie to GND or use a 0.1-μF cap from INB to GND to have the device self bias. Apply the single-ended signal to the INA pin.

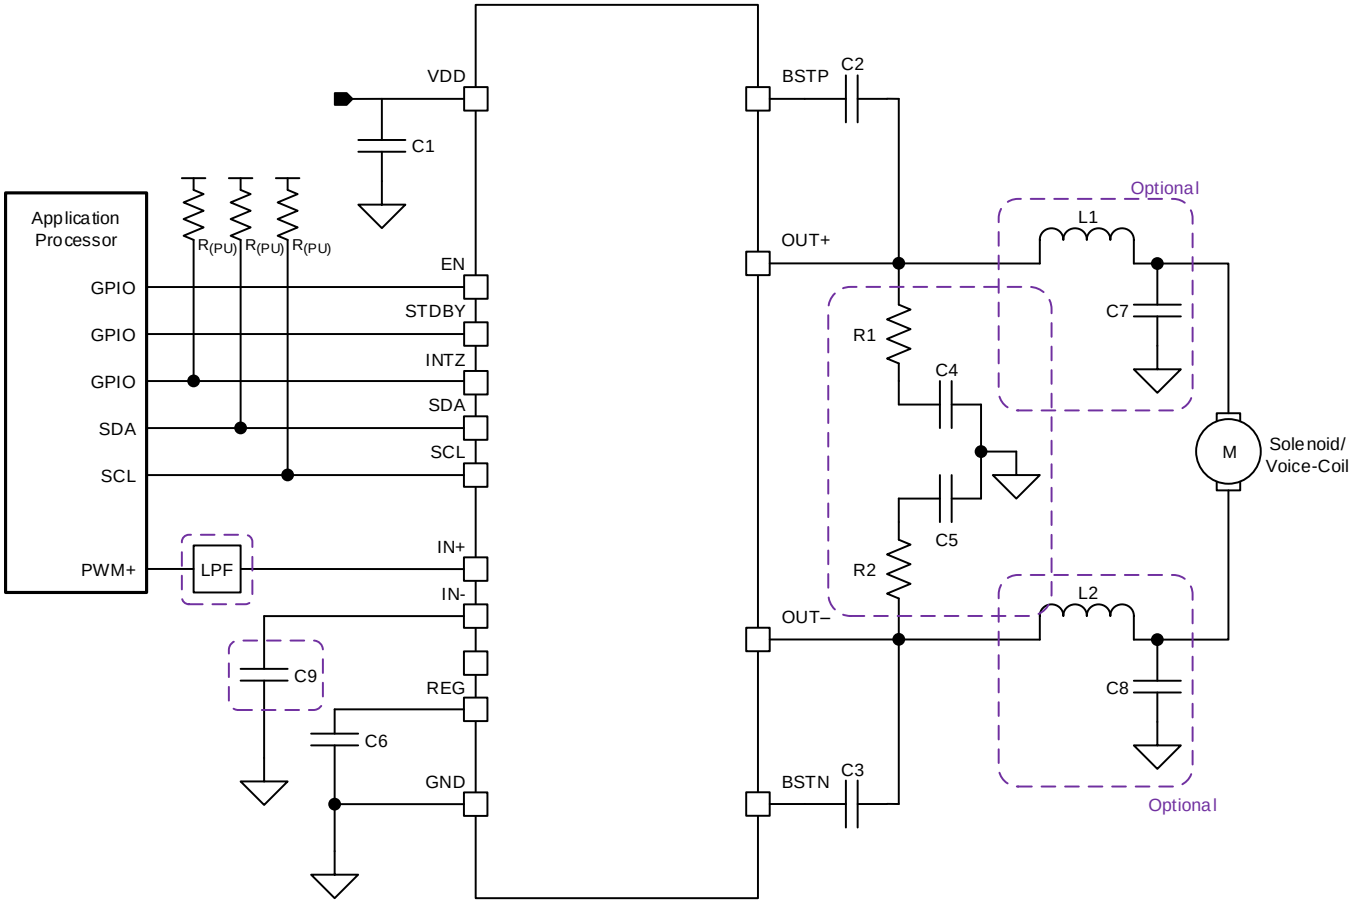


图 17. Typical Application Schematic

8.2.1.1 Design Requirements

For most applications the following component values found in 表 8 below can be used.

版权 © 2016, Texas Instruments Incorporated

Typical Applications (接下页)

表 8. Component Requirements Table

COMPONENT	DESCRIPTION	SPECIFICATION	TYPICAL VALUE
C1	Supply capacitor	Capacitance	22 µF, 10 µF, and 0.1 µF
C2/C3	Boost capacitor	Capacitance	0.22 µF
C4/C5	Output snubber capacitor	Capacitance	470 pF
C6	Regulator capacitor	Capacitance	1 µF
C9	Input decoupling capacitor	Capacitance	0.1 µF
R1/R2	Output snubber resistor	Resistance	3.3 Ω
$R_{(PU)}$	Pull-up resistor	Resistance	100 kΩ

8.2.1.2 Detailed Design Procedure

8.2.1.2.1 Optional Components

Note that in the diagrams, there are a few optional external components. These optional external components may be needed in the application to meet EMI/EMC standards and specifications by filters necessary frequency spectrums.

8.2.1.2.2 Capacitor Selection

A bulk bypass capacitor should be mounted between VBAT and GND. The capacitance needs to be >22 uF with a X5R or better rating on the power pins to GND. Also include two ceramic capacitors in the ranges of 220 pF to 1 uF and 100 nF to 1 uF. The bootstrap capacitors, BSTA and BSTB, should be 220-nF ceramic capacitors of quality X5R or better rated for at least the maximum rating of the pin.

8.2.1.2.3 Solenoid Selection

The DRV2510-Q1 solenoid driver can accommodate a variety of solenoids. Solenoids should have an equivalent resistance of 1.6 Ω or greater. Solenoids with lower resistances are prone to driving high currents. A maximum peak current of 3-A should not be exceeded.

8.2.1.2.4 Output Filter Considerations

The output filter is optional and is mainly for limiting peak currents. A second-order Butterworth low-pass filter with the cut-off frequency set to a few kilohertz should be sufficient. See 公式 2, 公式 3, and 公式 4 for example filter design.

$$H(s) = \frac{1}{s^2 + \sqrt{2}s + 1} \tag{1}$$

$$L_x = \frac{\sqrt{2} \times R_L}{2\omega_o} \tag{2}$$

$$2 \times C_F = \frac{\sqrt{2}}{2 \times \frac{R_L}{2} \times \omega_0} \tag{3}$$

$$\omega_0 = 2\pi \times f \tag{4}$$

8.2.1.3 Application Curves

These application curves were taken using an HA200 solenoid with a 100-g mass, and the acceleration was measured using the DRV-AAC16-EVM accelerometer. The following scales apply to the graphs:

- Output Differential Voltage scale is shown on the plots at 5-V/div
- Acceleration scale is 5.85-G/div
- Current scale is 2-A/div

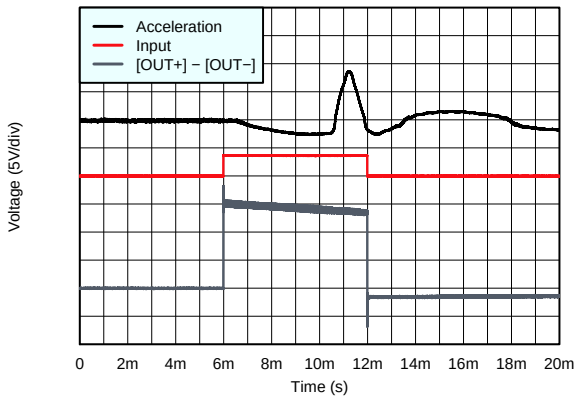


图 18. Voltage and Acceleration vs Time (Input Square Wave)

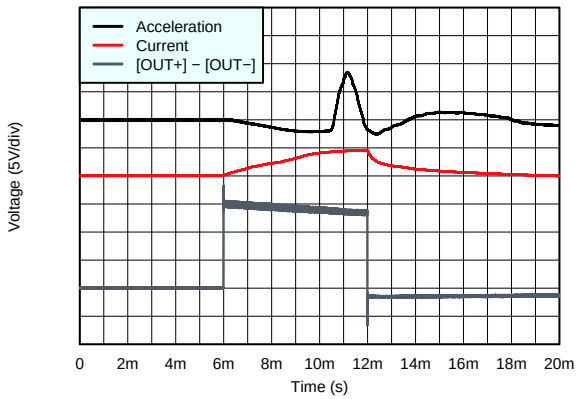


图 19. Voltage and Acceleration vs Time (Square Wave)

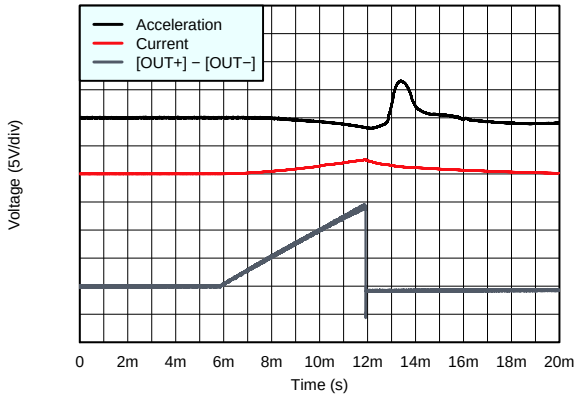


图 20. Voltage and Acceleration vs Time (Ramp Wave)

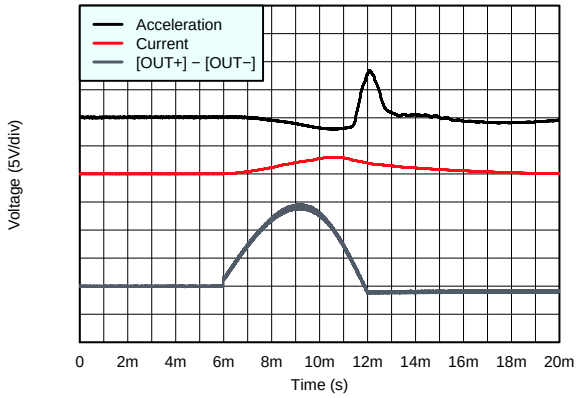


图 21. Voltage and Acceleration vs Time (1/2 Sine Wave)

8.2.1.4 Differential Input Diagram

To use the DRV2510-Q1 with a differential input source, apply both inputs differentially from a control source (GPIO, DAC, etc...).

版权 © 2016, Texas Instruments Incorporated

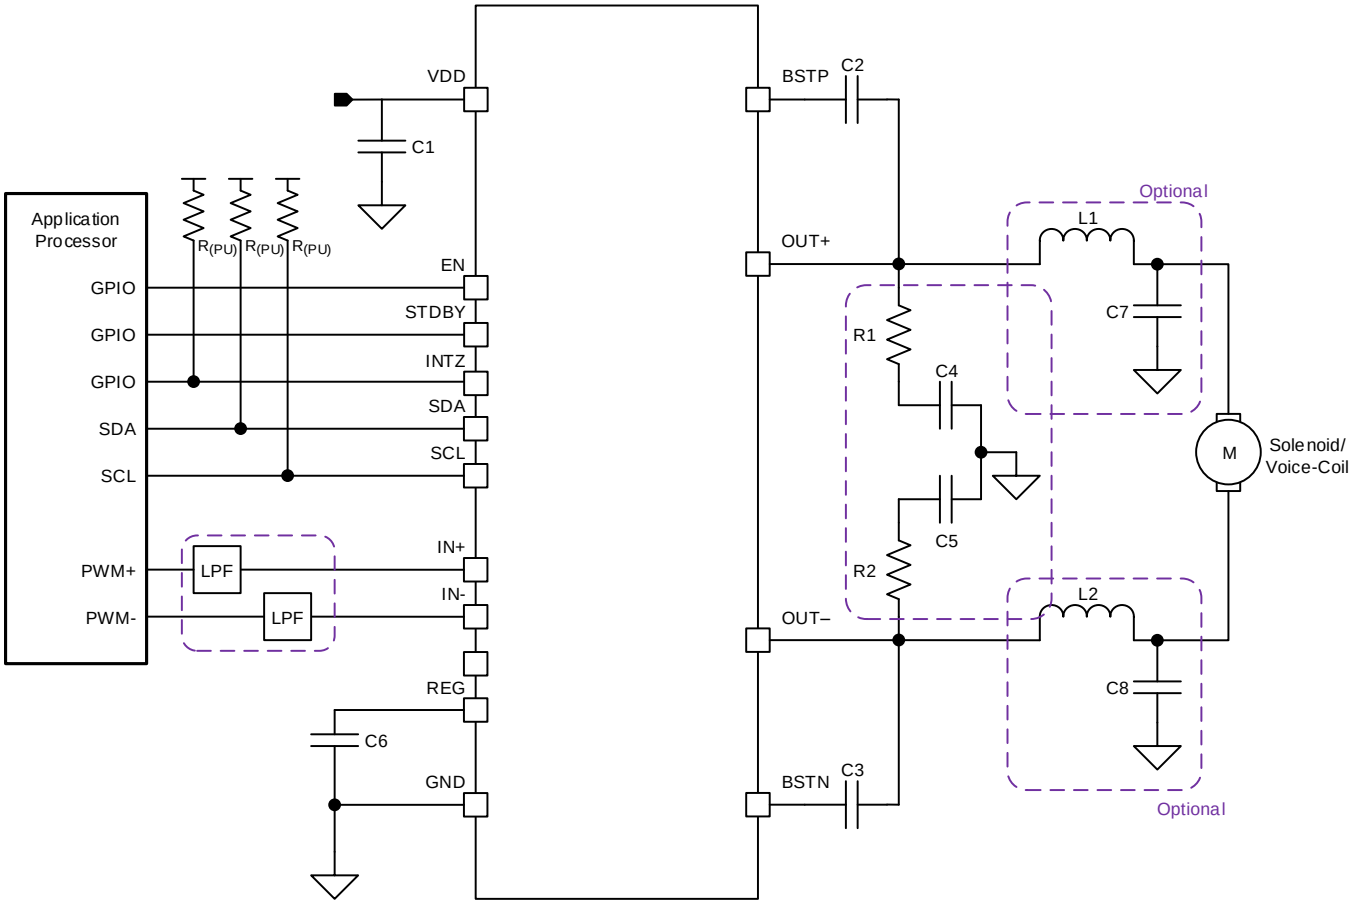


图 22. Typical Application Schematic

9 Power Supply Recommendations

The DRV2510-Q1 device operates from 5 V - 18 V and this supply should be able to handle high surge currents in order to meet the high currrent draws for haptics effects. Additionally the DRV2510-Q1 should have 22-µF, 10-µF and 0.1-µF ceramic capacitors near the VDD pin for additional decoupling from trace routing.

10 Layout

10.1 Layout Guidelines

The EVM layout optimizes for thermal dissipation and EMC performance. The DRV2510-Q1 device has a thermal pad down, and good thermal conduction and dissipation require adequate copper area. Layout also affects EMC performance. It is best practice to use the same/similiar layout as shown below in the DRV2510Q1EVM.

10.2 Layout Example

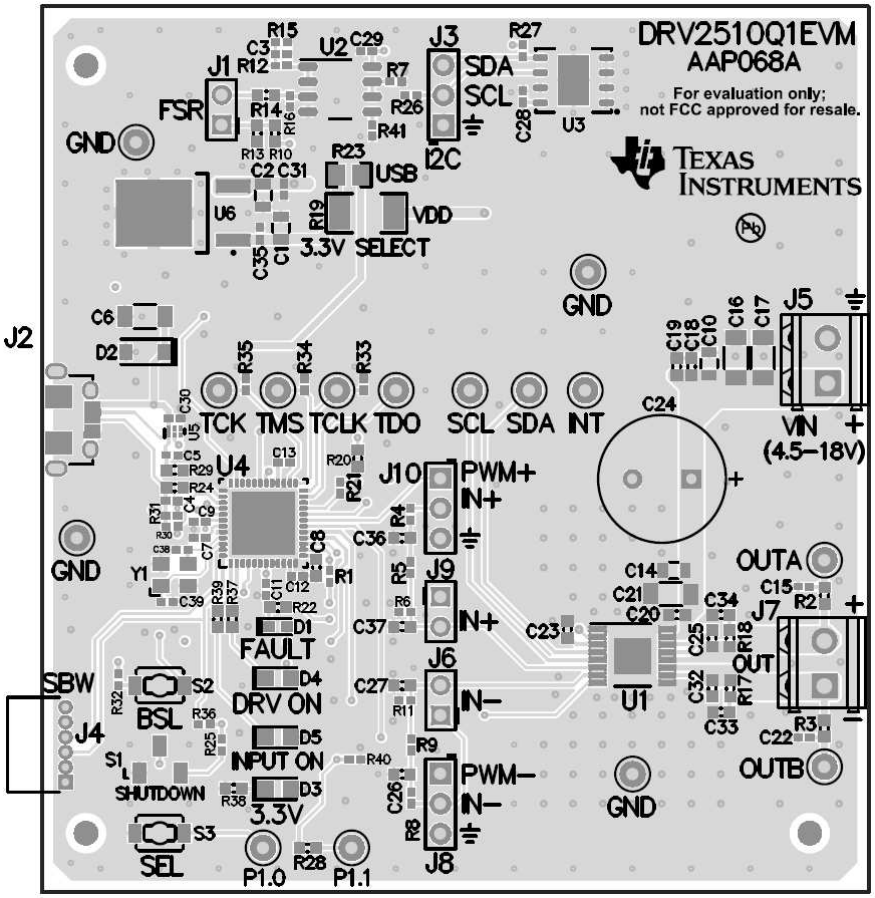


图 23. DRV2510-Q1 EVM

版权 © 2016, Texas Instruments Incorporated

11 器件和文档支持

11.1 器件支持

11.1.1 Third-Party Products Disclaimer

TI'S PUBLICATION OF INFORMATION REGARDING THIRD-PARTY PRODUCTS OR SERVICES DOES NOT CONSTITUTE AN ENDORSEMENT REGARDING THE SUITABILITY OF SUCH PRODUCTS OR SERVICES OR A WARRANTY, REPRESENTATION OR ENDORSEMENT OF SUCH PRODUCTS OR SERVICES, EITHER ALONE OR IN COMBINATION WITH ANY TI PRODUCT OR SERVICE.

11.2 商标

11.3 静电放电警告

这些装置包含有限的内置 ESD 保护。 存储或装卸时，应将导线一起截短或将装置放置于导电泡棉中，以防止 MOS 门极遭受静电损伤。

11.4 Glossary

SLYZ022 — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

版权 © 2016, Texas Instruments Incorporated

12 机械、封装和可订购信息

以下页中包括机械、封装和可订购信息。这些信息是针对指定器件可提供的最新数据。这些数据会在无通知且不对本文档进行修订的情况下发生改变。欲获得该数据表的浏览器版本，请查阅左侧的导航栏。

版权 © 2016, Texas Instruments Incorporated

重要声明

德州仪器(TI) 及其下属子公司有权根据 JESD46 最新标准, 对所提供的产品和服务进行更正、修改、增强、改进或其它更改， 并有权根据 JESD48 最新标准中止提供任何产品和服务。客户在下订单前应获取最新的相关信息, 并验证这些信息是否完整且是最新的。所有产品的销售都遵循在订单确认时所提供的TI 销售条款与条件。

TI 保证其所销售的组件的性能符合产品销售时 TI 半导体产品销售条件与条款的适用规范。仅在 TI 保证的范围内，且 TI 认为 有必要时才会使用测试或其它质量控制技术。除非适用法律做出了硬性规定，否则没有必要对每种组件的所有参数进行测试。

TI 对应用帮助或客户产品设计不承担任何义务。客户应对其使用 TI 组件的产品和应用自行负责。为尽量减小与客户产品和应 用相关的风险，客户应提供充分的设计与操作安全措施。

TI 不对任何 TI 专利权、版权、屏蔽作品权或其它与使用了 TI 组件或服务的组合设备、机器或流程相关的 TI 知识产权中授予 的直接或隐含权限作出任何保证或解释。TI 所发布的与第三方产品或服务有关的信息，不能构成从 TI 获得使用这些产品或服 务的许可、授权、或认可。使用此类信息可能需要获得第三方的专利权或其它知识产权方面的许可，或是 TI 的专利权或其它 知识产权方面的许可。

对于 TI 的产品手册或数据表中 TI 信息的重要部分，仅在没有对内容进行任何篡改且带有相关授权、条件、限制和声明的情况 下才允许进行复制。TI 对此类篡改过的文件不承担任何责任或义务。复制第三方的信息可能需要服从额外的限制条件。

在转售 TI 组件或服务时，如果对该组件或服务参数的陈述与 TI 标明的参数相比存在差异或虚假成分，则会失去相关 TI 组件 或服务的所有明示或暗示授权，且这是不正当的、欺诈性商业行为。TI 对任何此类虚假陈述均不承担任何责任或义务。

客户认可并同意，尽管任何应用相关信息或支持仍可能由 TI 提供，但他们将独力负责满足与其产品及在其应用中使用 TI 产品 相关的所有法律、法规和安全相关要求。客户声明并同意，他们具备制定与实施安全措施所需的全部专业技术和知识，可预见 故障的危险后果、监测故障及其后果、降低有可能造成人身伤害的故障的发生机率并采取适当的补救措施。客户将全额赔偿因 在此类安全关键应用中使用任何 TI 组件而对 TI 及其代理造成的任何损失。

在某些场合中，为了推进安全相关应用有可能对 TI 组件进行特别的促销。TI 的目标是利用此类组件帮助客户设计和创立其特 有的可满足适用的功能安全性标准和要求的终端产品解决方案。尽管如此，此类组件仍然服从这些条款。

TI 组件未获得用于 FDA Class III（或类似的生命攸关医疗设备）的授权许可，除非各方授权官员已经达成了专门管控此类使 用的特别协议。

只有那些 TI 特别注明属于军用等级或"增强型塑料"的 TI 组件才是设计或专门用于军事/航空应用或环境的。购买者认可并同 意，对并非指定面向军事或航空航天用途的 TI 组件进行军事或航空航天方面的应用，其风险由客户单独承担，并且由客户独 力负责满足与此类使用相关的所有法律和法规要求。

TI 已明确指定符合 ISO/TS16949 要求的产品，这些产品主要用于汽车。在任何情况下，因使用非指定产品而无法达到 ISO/TS16949 要求，TI不承担任何责任。

	产品		应用
数字音频	www.ti.com.cn/audio	通信与电信	www.ti.com.cn/telecom
放大器和线性器件	www.ti.com.cn/amplifiers	计算机及周边	www.ti.com.cn/computer
数据转换器	www.ti.com.cn/dataconverters	消费电子	www.ti.com/consumer-apps
DLP® 产品	www.dlp.com	能源	www.ti.com/energy
DSP - 数字信号处理器	www.ti.com.cn/dsp	工业应用	www.ti.com.cn/industrial
时钟和计时器	www.ti.com.cn/clockandtimers	医疗电子	www.ti.com.cn/medical
接口	www.ti.com.cn/interface	安防应用	www.ti.com.cn/security
逻辑	www.ti.com.cn/logic	汽车电子	www.ti.com.cn/automotive
电源管理	www.ti.com.cn/power	视频和影像	www.ti.com.cn/video
微控制器 (MCU)	www.ti.com.cn/microcontrollers		
RFID 系统	www.ti.com.cn/rfidsys		
OMAP应用处理器	www.ti.com/omap		
无线连通性	www.ti.com.cn/wirelessconnectivity	德州仪器在线技术支持社区	www.deyisupport.com

邮寄地址： 上海市浦东新区世纪大道1568 号，中建大厦32 楼邮政编码： 200122
Copyright © 2016, 德州仪器半导体技术（上海）有限公司

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
DRV2510QPWPRQ1	ACTIVE	HTSSOP	PWP	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-3-260C-168 HR	-40 to 125	DRV2510	Samples

(1) The marketing status values are defined as follows:
ACTIVE: Product device recommended for new designs.
LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.
NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.
PREVIEW: Device has been announced but is not in production. Samples may or may not be available.
OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.
TBD: The Pb-Free/Green conversion plan has not been defined.
Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.
Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.
Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.


(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

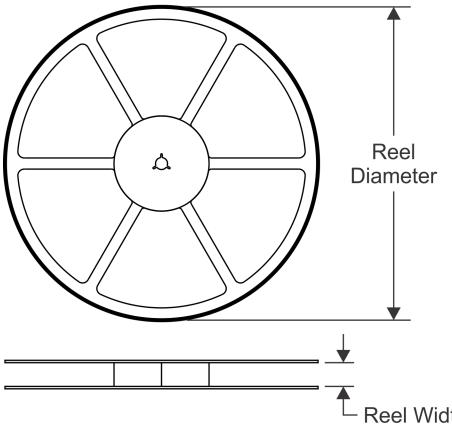


TAPE DIMENSIONS

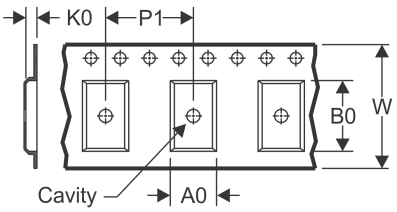

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

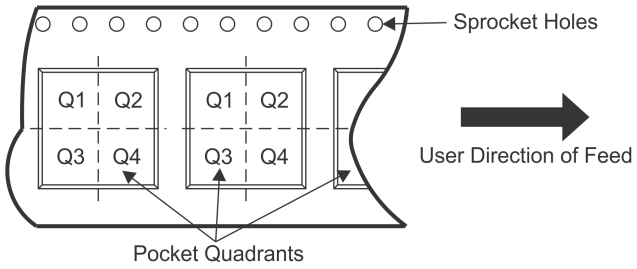

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
DRV2510QPWPRQ1	HTSSOP	PWP	16	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1

TAPE AND REEL BOX DIMENSIONS

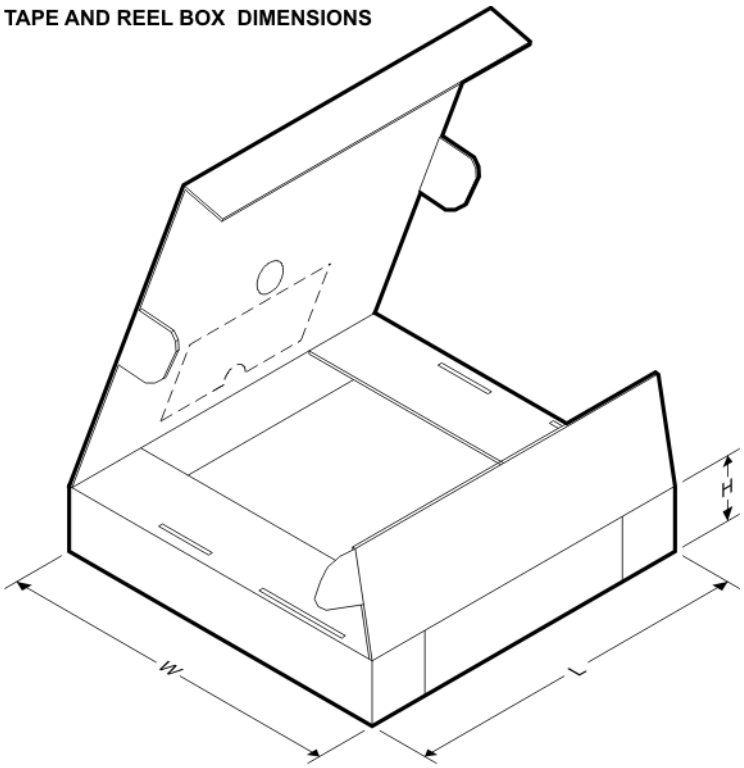


*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
DRV2510QPWPRQ1	HTSSOP	PWP	16	2000	350.0	350.0	43.0

PWP 16 PowerPAD™ TSSOP - 1.2 mm max height

PLASTIC SMALL OUTLINE

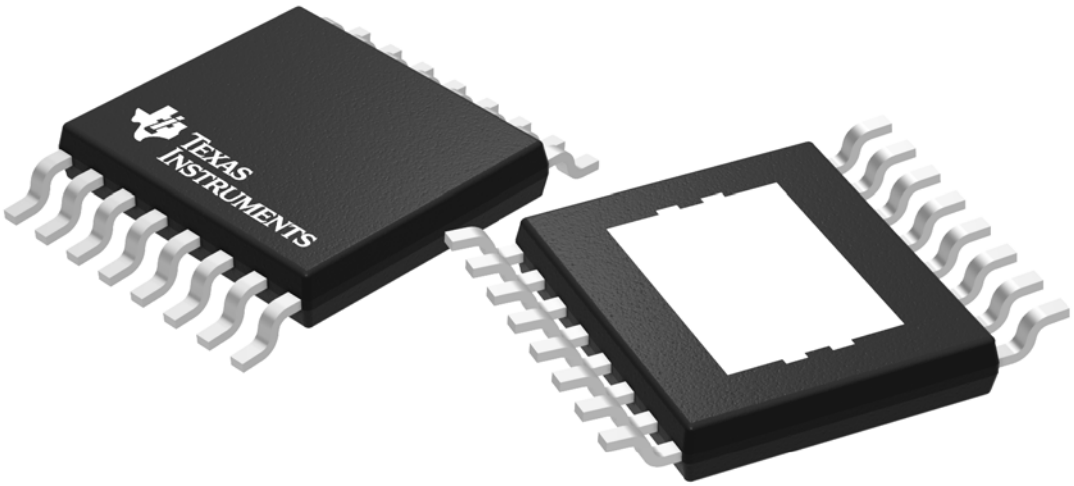

Images above are just a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.




PACKAGE OUTLINE

PWP0016B

PowerPAD™ TSSOP - 1.2 mm max height


PLASTIC SMALL OUTLINE

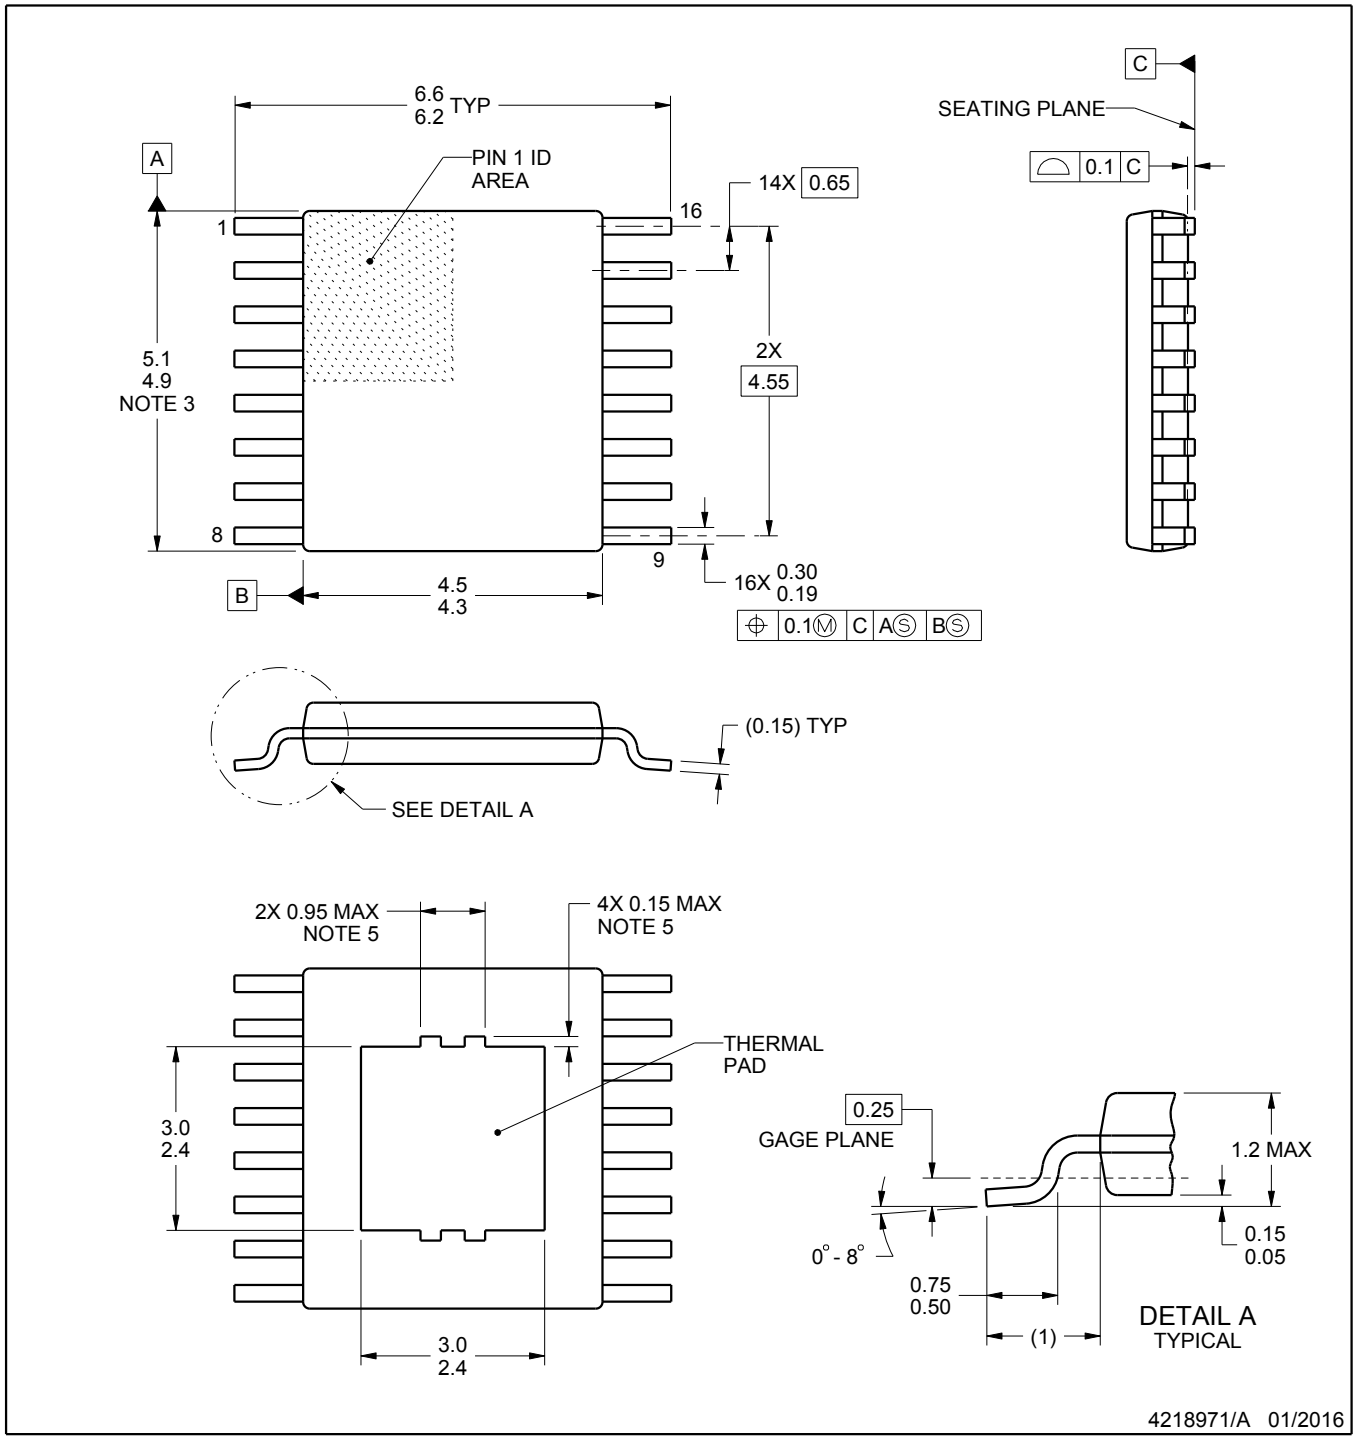


PowerPAD is a trademark of Texas Instruments.

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. Reference JEDEC registration MO-153.
5. Features may not be present.

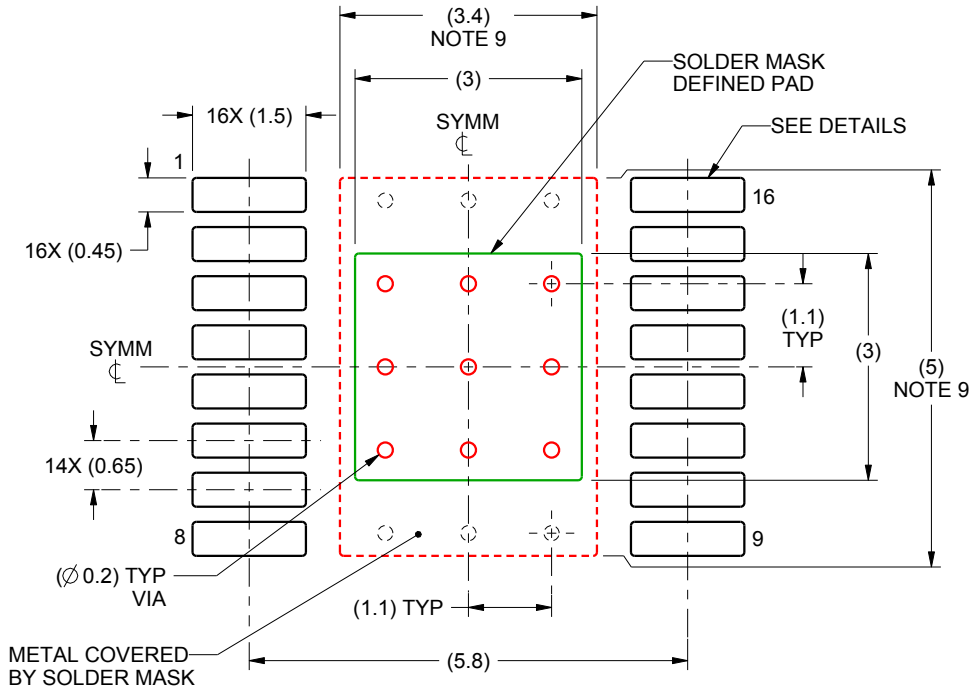

LAND PATTERN EXAMPLE
SCALE:10X

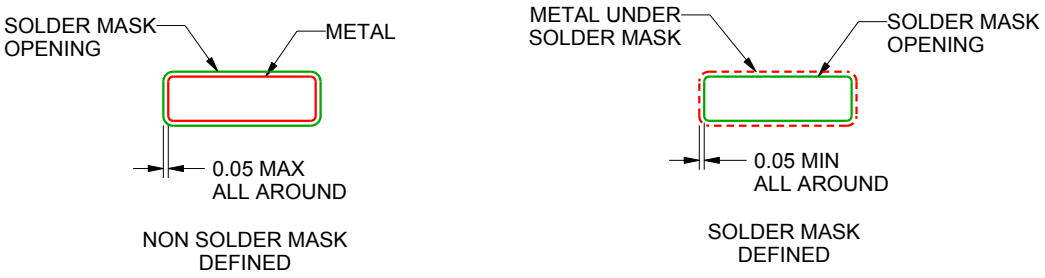


SOLDER MASK DETAILS
PADS 1-16

4218971/A 01/2016

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature numbers SLMA002 (www.ti.com/lit/slma002) and SLMA004 (www.ti.com/lit/slma004).
9. Size of metal pad may vary due to creepage requirement.

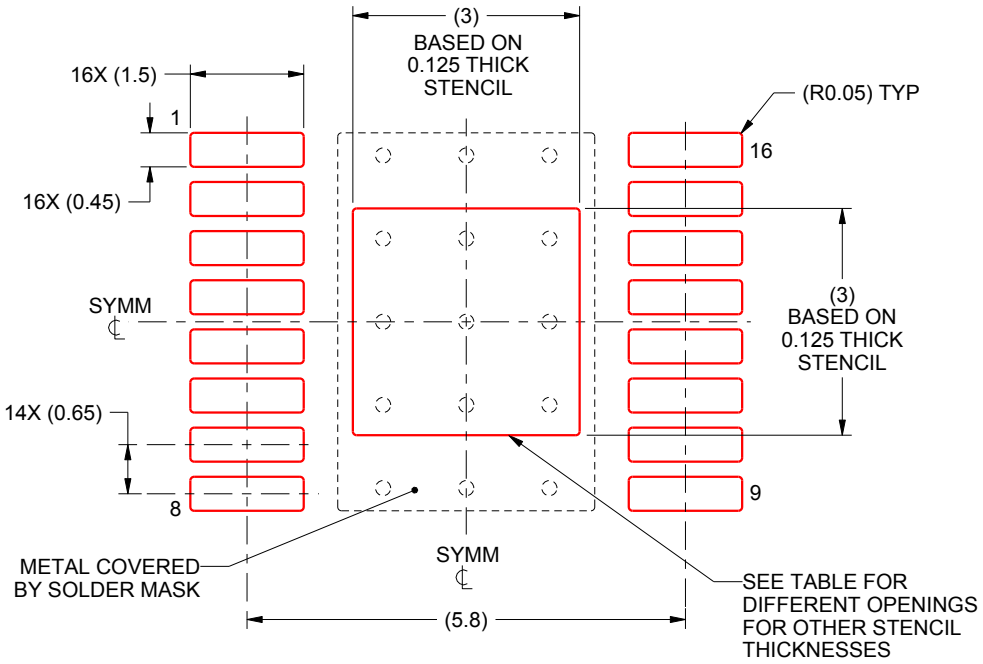

SOLDER PASTE EXAMPLE
EXPOSED PAD
100% PRINTED SOLDER COVERAGE BY AREA
SCALE:10X

STENCIL THICKNESS	SOLDER STENCIL OPENING
0.1	3.35 X 3.35
0.125	3 X 3 (SHOWN)
0.15	2.74 X 2.74
0.175	2.54 X 2.54

4218971/A 01/2016

NOTES: (continued)

10. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
11. Board assembly site may have different recommendations for stencil design.

重要声明和免责声明

TI 均以“原样”提供技术性及可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证其中不含任何瑕疵，且不做任何明示或暗示的担保，包括但不限于对适销性、适合某特定用途或不侵犯任何第三方知识产权的暗示担保。

所述资源可供专业开发人员应用TI 产品进行设计使用。您将对以下行为独自承担全部责任：(1) 针对您的应用选择合适的TI 产品；(2) 设计、验证并测试您的应用；(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。所述资源如有变更，恕不另行通知。TI 对您使用所述资源的授权仅限于开发资源所涉及TI 产品的相关应用。除此之外不得复制或展示所述资源，也不提供其它TI或任何第三方的知识产权授权许可。如因使用所述资源而产生任何索赔、赔偿、成本、损失及债务等，TI对此概不负责，并且您须赔偿由此对TI 及其代表造成的损害。

TI 所提供产品均受TI 的销售条款 (http://www.ti.com.cn/zh-cn/legal/termsofsale.html) 以及ti.com.cn上或随附TI产品提供的其他可适用条款的约束。TI提供所述资源并不扩展或以其他方式更改TI 针对TI 产品所发布的可适用的担保范围或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122
Copyright © 2019 德州仪器半导体技术（上海）有限公司