

TPS56637 4.5V 至 28V 输入、6A 同步降压转换器


1 特性

- 4.5V 至 28V 的宽输入电压范围
- 0.6V 至 16V 的宽输出电压范围
- 6A 最大连续输出电流
- 500kHz 开关频率
- 集成 26mΩ 和 12mΩ MOSFET
- 支持 POSCAP 和所有 MLCC 输出电容器
- D-CAP3™ 针对快速瞬态响应的控制模式
- 可选强制持续导通模式 (FCCM) (用以实现窄输出纹波) 或自动跳跃 Eco-mode™ (用以实现轻负载效率)
- 0.6V ±1% 基准电压
- 内部 2ms 软启动
- 内置输出放电功能
- 电源正常指示器可监控输出电压
- 非锁存输出 OV、UV、OT 保护可提供故障保护
- -40°C 至 +150°C 的运行结温范围
- 小型 10 引脚 3.0mm × 3.0mm HotRod™ 四方扁平无引线 (QFN) 封装

2 应用

- 个人打印机、多功能打印机
- 数字电视
- 监控器
- 工业计算机

简化原理图

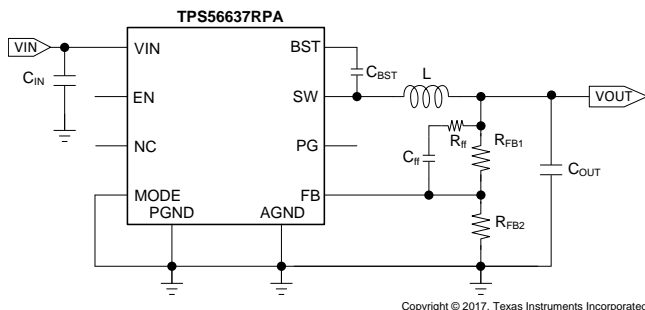

3 说明

TPS56637 是一款自适应接通时间 D-CAP3™ 控制模式同步降压直流/直流转换器，能够提供 6A 的连续输出电流。该 Eco-mode™ 控制方案（脉冲跳跃）优化了该开关模式电源 (SMPS) 器件，使其适用于需要非常低的功耗的应用，例如打印机、数字电视和监控器。

TPS56637 具有支持 30V 电压的 MOSFET，因此可用于由 24V 总线电源线供电的应用。该 D-CAP3™ 控制模式只需很少的外部组件即可轻松实现稳定的稳压设计。它支持具有成本效益的陶瓷电容器。

TPS56637 兼具可供用户在轻负载条件下进行选择的 FCCM 和 Eco-mode™ 控制方案，因此可用于更广泛的应用。该 D-CAP3™ 控制模式可支持高达 16V 的输出。


TPS56637 具有逐周期电流限制以及非锁存过压、欠压和过热保护。

器件信息(1)

器件型号	封装	封装尺寸 (标称值)
TPS56637	VQFN-HR (10)	3.00mm × 3.00mm

(1) 如需了解所有可用封装，请参阅产品说明书末尾的可订购产品附录。

TPS56637 效率

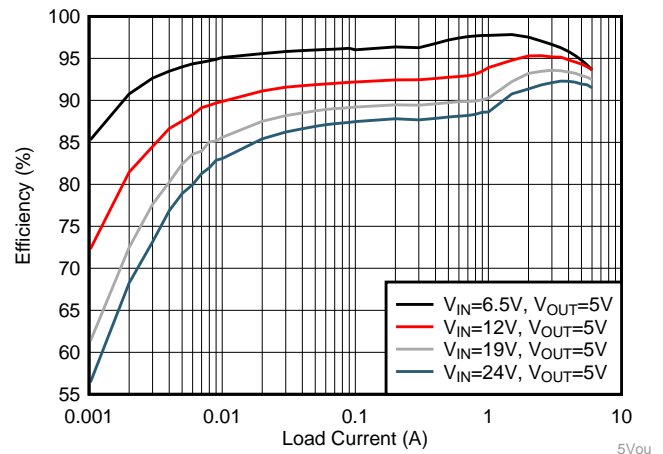


目录

<p>1 特性 1</p> <p>2 应用 1</p> <p>3 说明 1</p> <p>4 修订历史记录 2</p> <p>5 Pin Configuration and Functions 3</p> <p>6 Specifications 4</p> <p> 6.1 Absolute Maximum Ratings 4</p> <p> 6.2 Handling Ratings 4</p> <p> 6.3 Recommended Operating Conditions 4</p> <p> 6.4 Thermal Information 4</p> <p> 6.5 Electrical Characteristics 5</p> <p> 6.6 Timing Requirements 6</p> <p> 6.7 Typical Characteristics 6</p> <p>7 Detailed Description 9</p> <p> 7.1 Overview 9</p> <p> 7.2 Functional Block Diagram 10</p> <p> 7.3 Feature Description 10</p>	<p> 7.4 Device Functional Modes 13</p> <p>8 Application and Implementation 15</p> <p> 8.1 Application Information 15</p> <p> 8.2 Typical Application 15</p> <p>9 Power Supply Recommendations 20</p> <p>10 Layout 20</p> <p> 10.1 Layout Guidelines 20</p> <p> 10.2 Layout Example 21</p> <p>11 器件和文档支持 22</p> <p> 11.1 文档支持 22</p> <p> 11.2 接收文档更新通知 22</p> <p> 11.3 社区资源 22</p> <p> 11.4 商标 22</p> <p> 11.5 静电放电警告 22</p> <p> 11.6 术语表 22</p> <p>12 机械、封装和可订购信息 22</p> <p> 12.1 Package Option Addendum 23</p>
---	---

4 修订历史记录

日期	修订版本	说明
2018 年 7 月	*	预告产品发布。

5 Pin Configuration and Functions

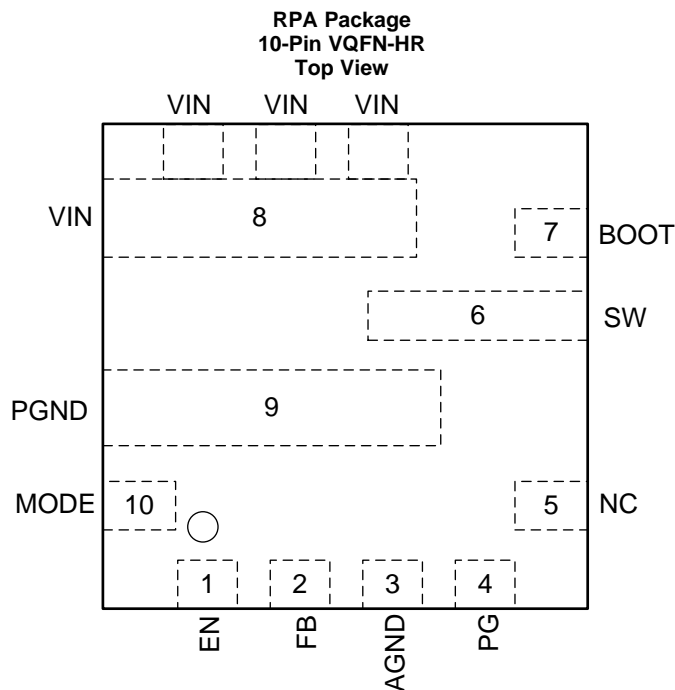

Pin Functions

PIN		TYPE	DESCRIPTION
NO.	NAME		
1	EN	I	Enable input control, leaving this pin floating enables the converter. It also can be used to adjust the input UVLO by connecting to the resistor divider between VIN and EN. When choose resistor divider, need make sure V_{EN} voltage lower than its max recommended operation voltage 5.5V.
2	FB	I	Output feedback. Connect to the resistor divider between output voltage and GND.
3	AGND	G	Ground of internal analog circuitry. Connect AGND to PGND plane at a single point.
4	PG	O	Open Drain Power Good Indicator, it is asserted low if output voltage is out of PG threshold due to overvoltage, dropout, thermal shutdown, EN shutdown or during soft-start.
5	NC	N	Not Connected
6	SW	O	Switching node terminal. Connect the output inductor to this pin with wide and short tracks
7	BOOT	I	Supply input for the gate drive voltage of the high-side MOSFET. Connect a 0.1uF bootstrap capacitor between BOOT and SW.
8	VIN	P	Input voltage supply pin. Drain terminal of high side MOSFET. Connect the input decoupling capacitors between VIN and GND.
9	PGND	G	Power GND terminal. Source terminal of low side MOSFET.
10	MODE	I	Operation mode selection pin. Leaving this pin floating (>350k Ω) forces the TPS56637 into FCCM. Connecting this pin to GND (<50k Ω) forces the TPS56637 into Eco-mode™ under light load.

ADVANCE INFORMATION

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

		MIN	MAX	UNIT
Input voltage	V _{IN}	-0.3	30	V
	BOOT	-0.3	36	V
	BOOT (vs SW)	-0.3	6.0	V
	EN, FB, MODE	-0.3	6.0	V
	PGND, AGND	-0.3	0.3	V
Output voltage	SW	-0.3	30	V
	SW (10 ns transient)	-4	30	V
	PG	-0.3	6	V
Operating junction temperature, T _J		-40	150	°C
Storage temperature, T _{stg}		-65	150	°C

(1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

6.2 Handling Ratings

		VALUE	UNIT
V _{ESD}	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins ⁽¹⁾	±2000
		Charged device model (CDM), per JEDEC specification JESD22-C101, all pins ⁽²⁾	±500
			V

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
Input Voltage	V _{IN}	4.5		28	V
	BOOT	4.5		33.5	V
	BOOT (vs SW)	-0.1		5.5	V
	EN, FB, MODE	-0.1		5.5	V
	PGND, AGND	-0.1		0.1	V
Output Voltage	SW	-0.1		28	V
	PG	-0.1		5.5	V
Operating junction temperature, T _J		-40		150	°C

6.4 Thermal Information

THERMAL METRIC ⁽¹⁾		TPS56637	UNIT
		QFN HOTROD	
		10 PINS	
R _{θJA}	Junction-to-ambient thermal resistance	49.1	°C/W
R _{θJC(top)}	Junction-to-case (top) thermal resistance	28.8	°C/W
R _{θJB}	Junction-to-board thermal resistance	16.1	°C/W
Ψ _{JT}	Junction-to-top characterization parameter	0.8	°C/W
Ψ _{JB}	Junction-to-board characterization parameter	16.2	°C/W

(1) For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report, SPRA953.

6.5 Electrical Characteristics

 $T_J = -40^{\circ}\text{C}$ to 150°C , $V_{IN} = 12\text{ V}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
SUPPLY CURRENT						
I_Q	Operating – non-switching supply current	$T_J=25^{\circ}\text{C}$, $V_{EN}=5\text{ V}$, $V_{FB} = 0.7\text{ V}$		125		μA
I_{OFF}	Shutdown supply current	$T_J=25^{\circ}\text{C}$, $V_{EN}=0\text{ V}$		2		μA
UVLO						
UVLO	V_{IN} Under-Voltage Lockout	Wake up V_{IN} voltage	4.0	4.2	4.4	V
		Shut down V_{IN} voltage	3.4	3.6	3.8	V
		Hysteresis V_{IN} voltage		600		mV
ENABLE(EN PIN)						
I_{EN_INPUT}	Input current	$V_{EN} = 1.1\text{V}$		1		μA
I_{EN_HYS}	Hysteresis current	$V_{EN} = 1.3\text{V}$		4		μA
$V_{EN(ON)}$	Enable threshold	EN rising		1.23	1.29	V
$V_{EN(OFF)}$		EN falling	1.04	1.12		V
FEEDBACK VOLTAGE						
V_{FB}	Feedback voltage	$V_{OUT} = 5\text{V}$, continuous mode operation, $T_J=25^{\circ}\text{C}$	0.594	0.6	0.606	V
		$V_{OUT} = 5\text{V}$, continuous mode operation, $T_J=-40^{\circ}\text{C}$ to 150°C	0.591	0.6	0.609	V
$I_{(VFB)}$	V_{FB} input current	$V_{FB} = 0.7\text{V}$, $T_J = 25^{\circ}\text{C}$	-0.15	0	0.15	μA
MOSFET						
$R_{DS(on)h}$	High side switch resistance	$T_J = 25^{\circ}\text{C}$, $V_{BST} - V_{SW} = 5\text{ V}$		26		$\text{m}\Omega$
$R_{DS(on)l}$	Low side switch resistance	$T_J = 25^{\circ}\text{C}$		12		$\text{m}\Omega$
CURRENT LIMIT						
I_{OCL}	Valley current limit		6.3	7.5	8.6	A
I_{OC_REV}	Reverse current limit for FCCM Mode		2.3	3	3.7	A
POWER GOOD						
V_{PGTH}	PG Threshold	V_{FB} falling (Fault)		85%		
		V_{FB} rising (Good)		90%		
		V_{FB} falling (Good)		110%		
		V_{FB} rising (Fault)		115%		
I_{PGSINK}	PG sink current	$V_{FB} = 0.5\text{V}$, $V_{PG} = 0.5\text{V}$		1.5		mA
I_{PGLK}	PG leakage current	$V_{PG} = 5.5\text{V}$, $V_{OUT} = 5.1\text{V}$	-1		1	μA
FREQUENCY						
F_{SW}	Switching frequency	$V_{IN}=12\text{V}$, $V_{OUT}=3.3\text{V}$		500		kHz
OUTPUT UNDERVOLTAGE AND OVERVOLTAGE PROTECTION						
V_{OVP}	Output OVP threshold	OVP detect(L>H)		125%		
		Hysteresis		5%		
V_{UVP}	Output UVP threshold	Hiccup detect(H>L)		65%		
		Hysteresis		5%		
THERMAL SHUTDOWN						
T_{SDN}	Thermal shutdown threshold	Temperature Rising		165		$^{\circ}\text{C}$
		Hysteresis		30		$^{\circ}\text{C}$
SW DISCHARGE RESISTANCE						
R_{DISCHG}	V_{OUT} discharge resistance	$V_{EN}=0$, $V_{SW}=0.5\text{V}$, $T_J=25^{\circ}\text{C}$		200		Ω

6.6 Timing Requirements

$T_J = -40^{\circ}\text{C}$ to 150°C , $V_{IN} = 12\text{ V}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
ON-TIME TIMER CONTROL						
$t_{ON(MIN)}$	Minimum on time ⁽¹⁾			50		ns
$t_{OFF(MIN)}$	Minimum off time	$V_{FB} = 0.5\text{ V}$, measure SW at 50% V_{IN} , Eco-mode		180	300	ns
SOFT START						
T_{SS}	Soft start time	Internal soft-start time		2		ms
OUTPUT UNDERVOLTAGE AND OVERVOLTAGE PROTECTION						
T_{ON}	UV protection wait Time	UV triggered (V_{FB} lower than 65% V_{FB_nom})		0.25		ms
T_{OFF_OC}	UV protection recover time			25		ms

(1) Not production tested

6.7 Typical Characteristics

$V_{IN} = 12\text{ V}$ (unless otherwise noted)

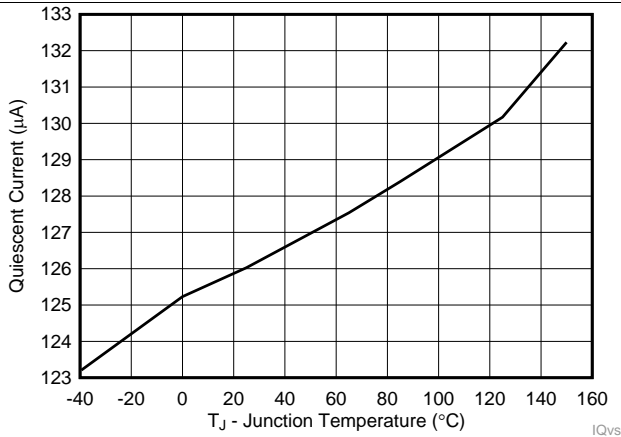


图 1. Quiescent Current vs Temperature

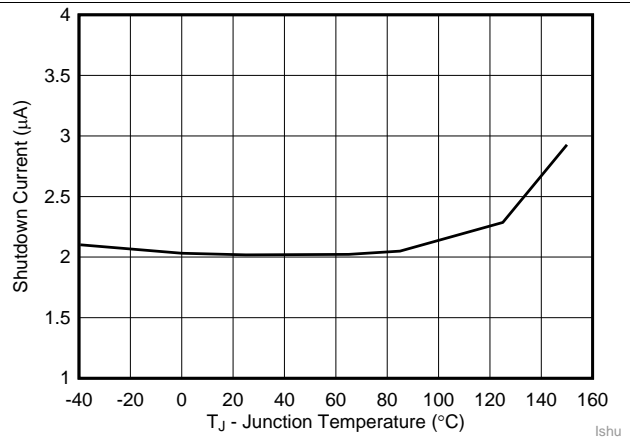


图 2. Shutdown Current vs Temperature

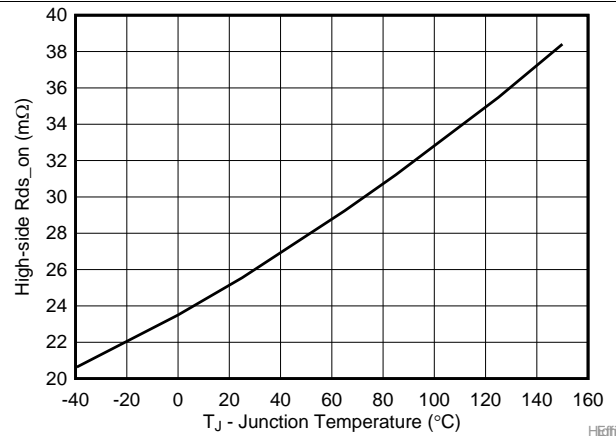


图 3. High-Side $R_{DS(on)}$ vs Temperature







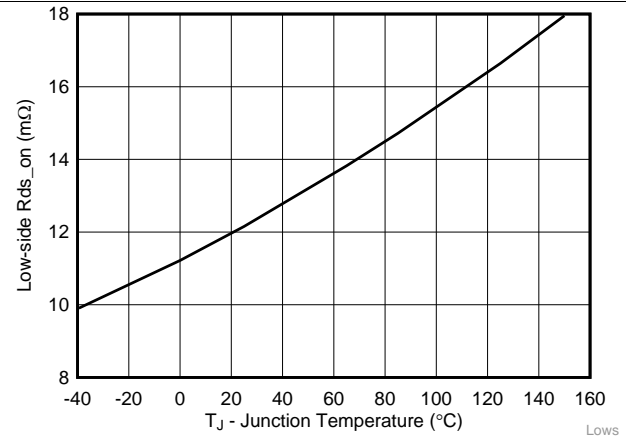


图 4. Low-side $R_{DS(on)}$ vs Temperature

Typical Characteristics (接下页)





$V_{IN} = 12\text{ V}$ (unless otherwise noted)

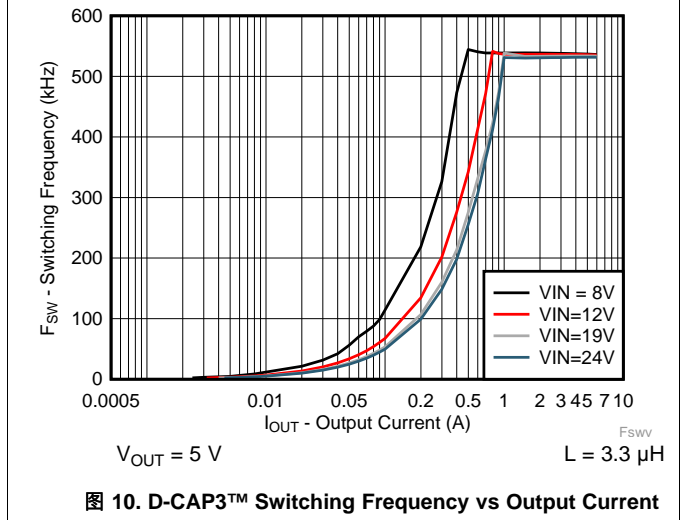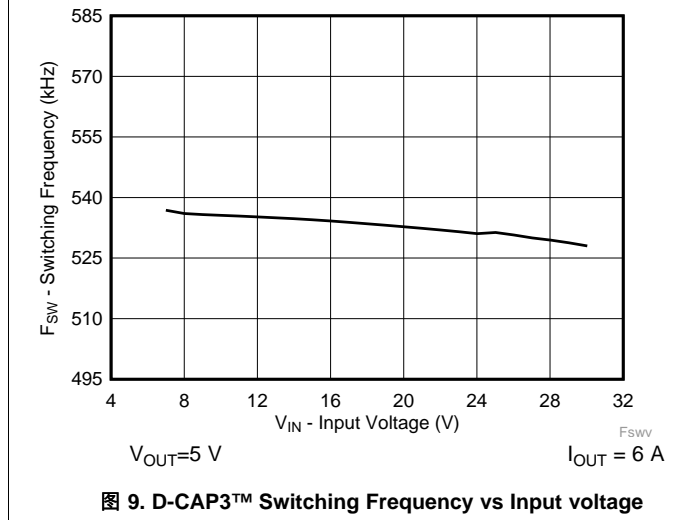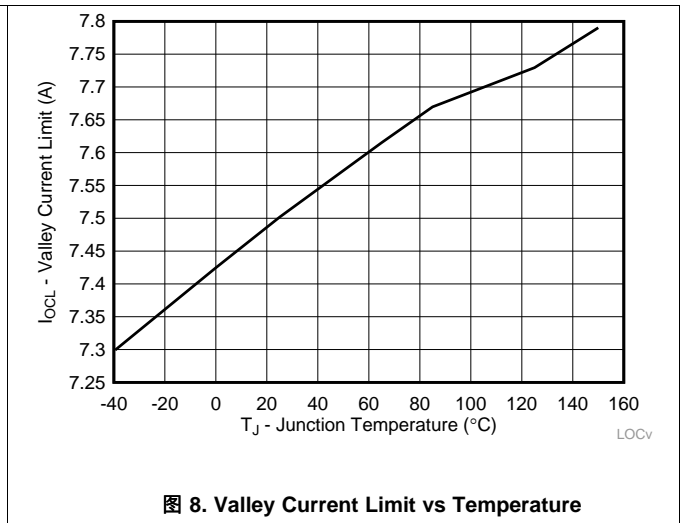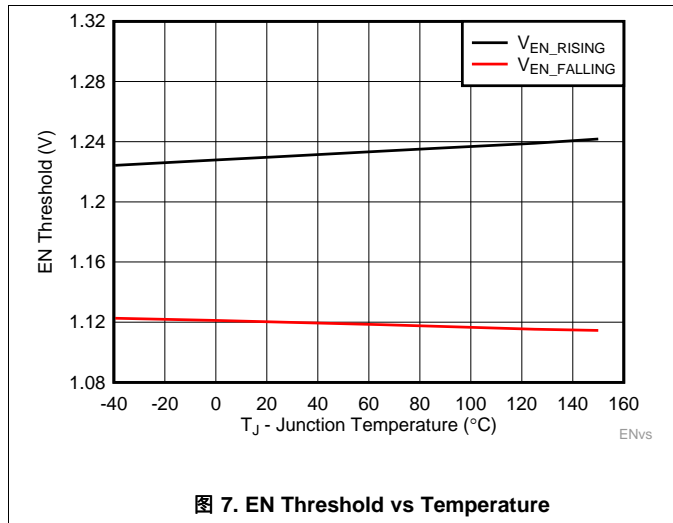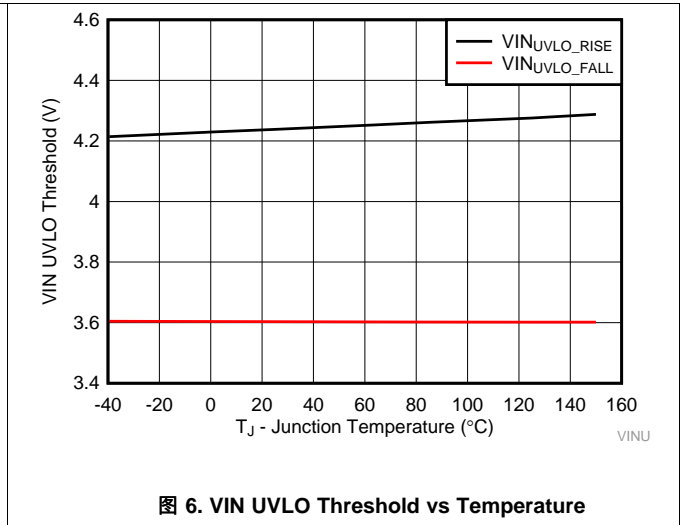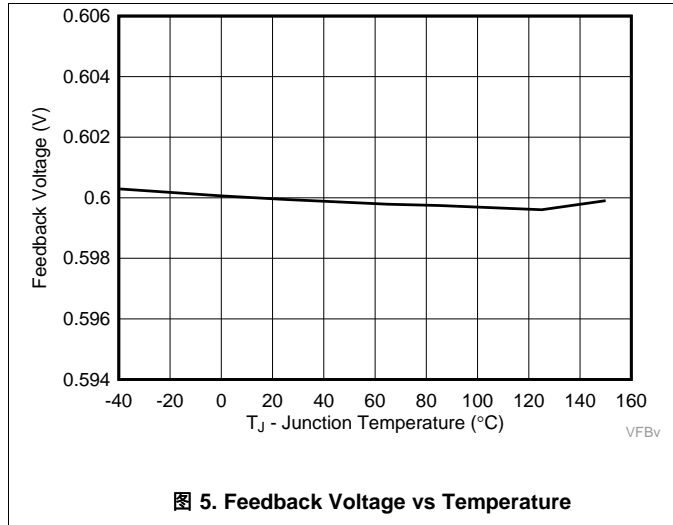

ADVANCE INFORMATION

Typical Characteristics (接下页)

$V_{IN} = 12\text{ V}$ (unless otherwise noted)

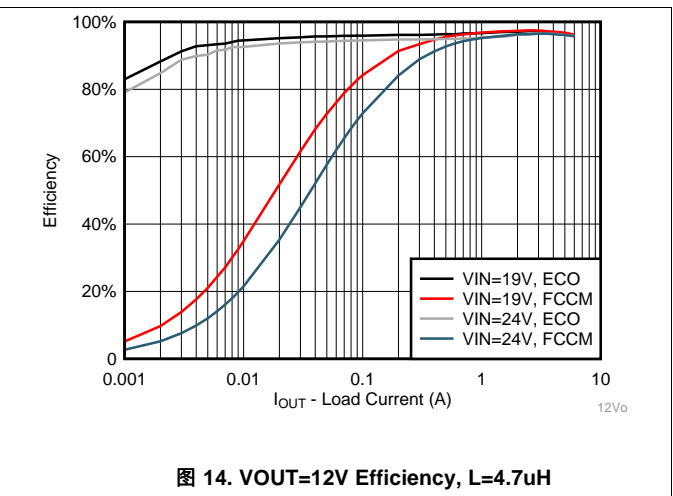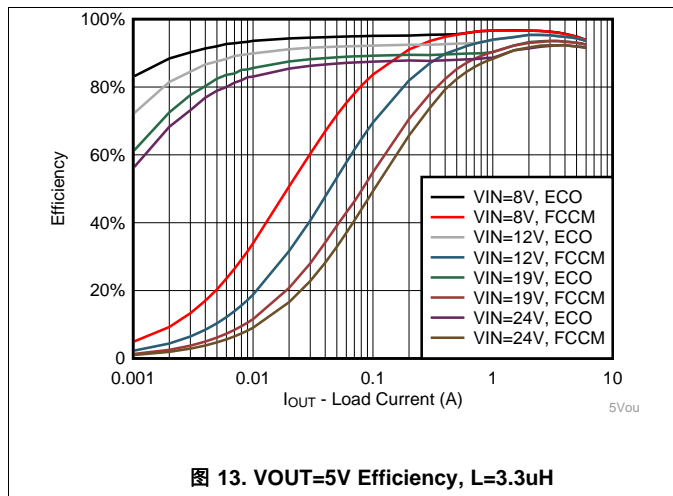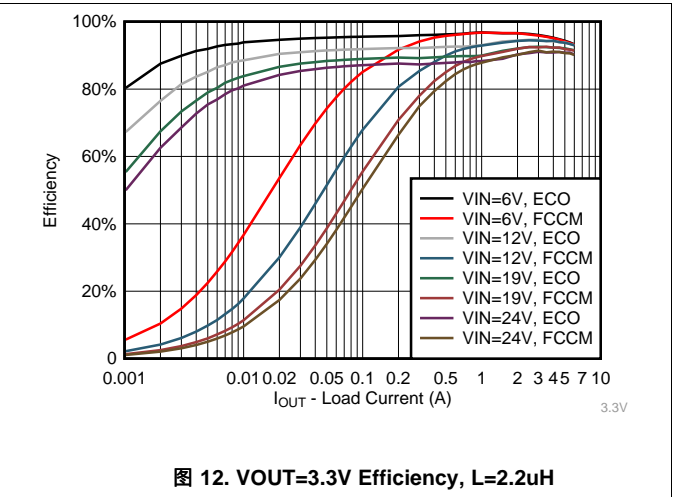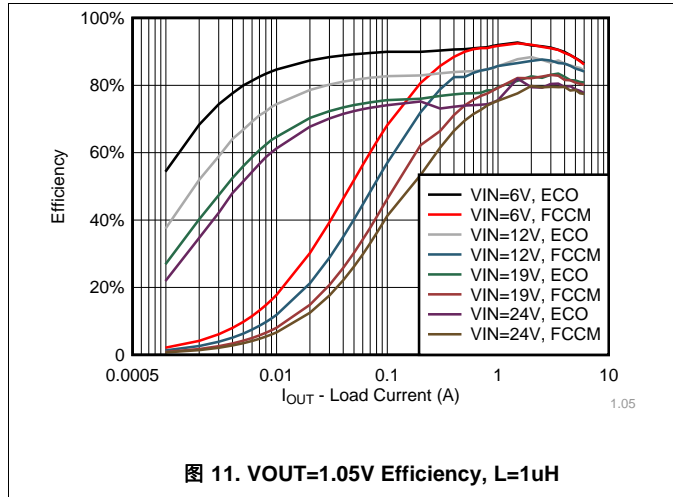

ADVANCE INFORMATION

7 Detailed Description


7.1 Overview

The TPS56637 is a high efficiency 6-A synchronous step-down converter. The proprietary D-CAP3™ control mode supports low ESR ceramic output capacitors without external compensation circuits. The fast transient response of D-CAP3™ Control Mode can reduce the output capacitance required to meet a specific level of performance.

In addition, MODE pin provides selectable forced continuous conduction mode (FCCM) for tight output ripple or auto-skipping Eco-mode™ for light load efficiency.

The device output can support up to 16V due to two stage ripple injection implement. The device is protected from over voltage, under voltage and over temperature conditions.

7.2 Functional Block Diagram

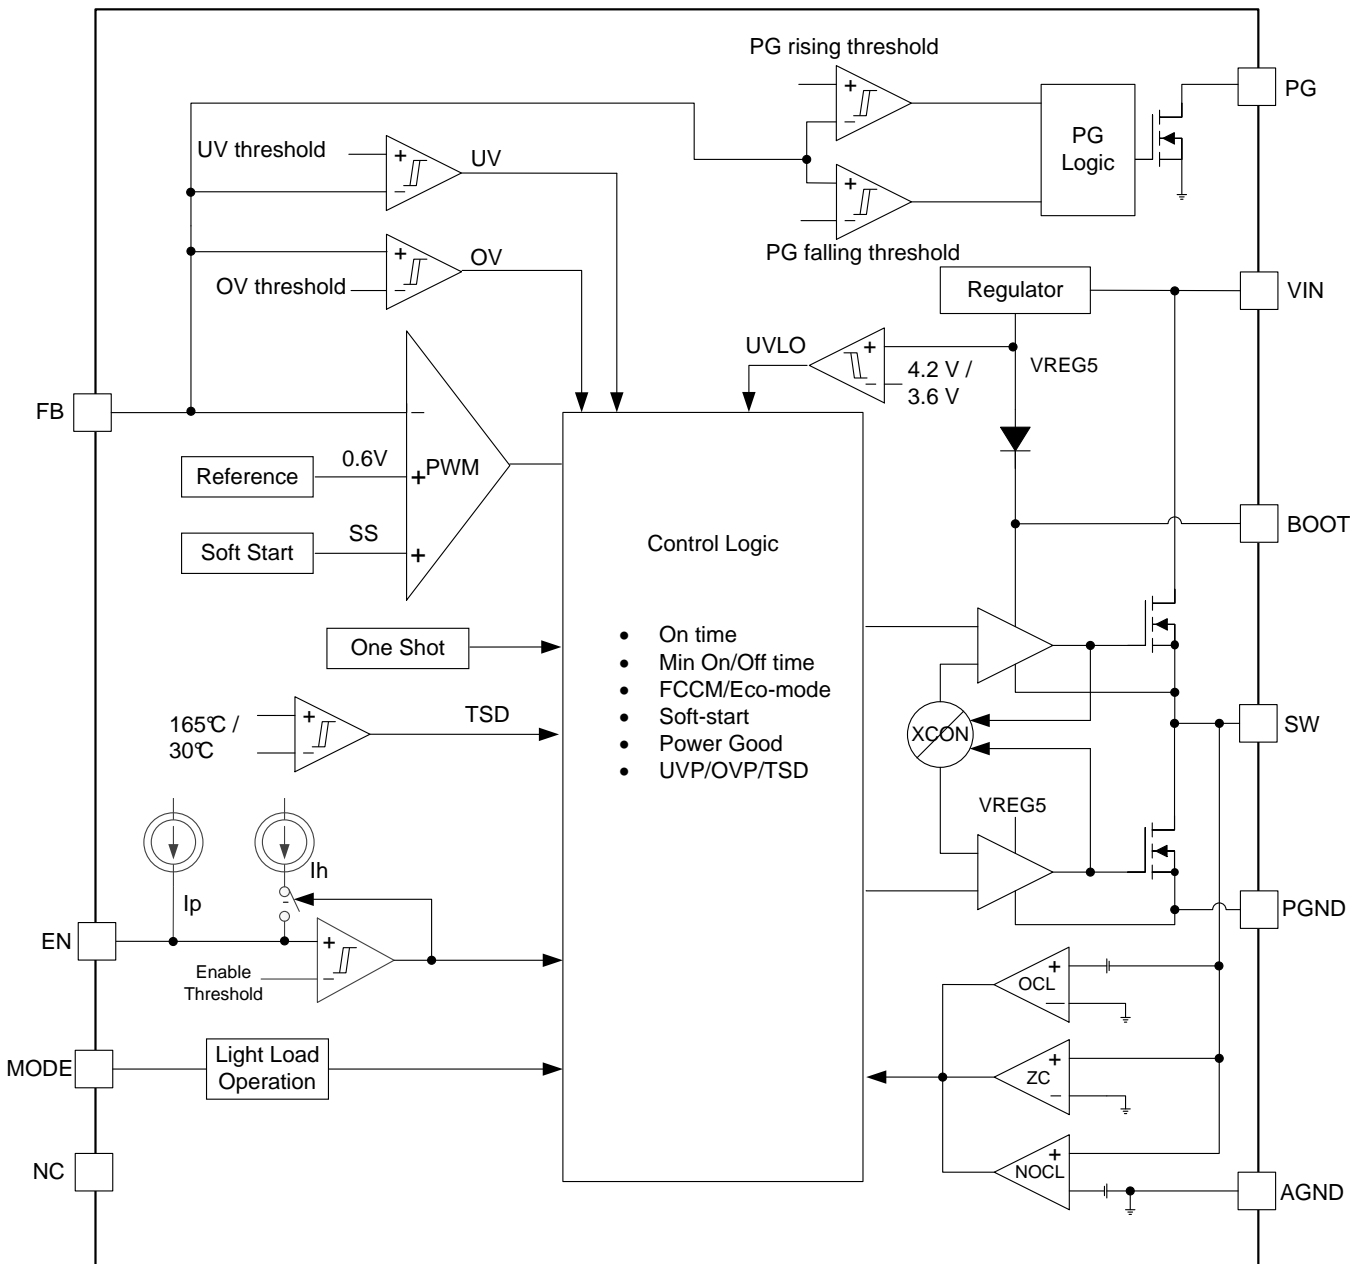

Copyright © 2017, Texas Instruments Incorporated

7.3 Feature Description

7.3.1 The Adaptive On-Time Control and PWM Operation

The main control loop of the TPS56637 is an adaptive on-time pulse width modulation controller that supports a proprietary D-CAP3™ control mode. The D-CAP3™ control mode combines adaptive on-time control with an internal compensation circuit for pseudo-fixed frequency and low external component count configuration with both low ESR and ceramic output capacitors. It is stable even with virtually no ripple at the output.

Feature Description (接下页)

At the beginning of each cycle, the high-side MOSFET is turned on. This MOSFET is turned off after internal one-shot timer expires. This one shot duration is set proportional to the converter input voltage, V_{IN} , and inversely proportional to the output voltage, V_O , to maintain a pseudo-fixed frequency over the input voltage range, hence it is called adaptive on-time control. The one-shot timer is reset and the high-side MOSFET is turned on again when the feedback voltage falls below the reference voltage. An internal ramp is added to reference voltage to simulate output ripple, eliminating the need for ESR induced output ripple from D-CAP3™ control mode.

7.3.2 Mode Selection

TPS56637 has a MODE pin that can offer 2 different states of operations under light load. If MODE pin is short to GND, TPS56637 works under Eco-mode™ control scheme. If MODE pin is floating, TPS56637 works under FCCM mode. The MODE pin will be detected and latched after EN pin toggles high, and then the internal soft-start function begins to ramp up the reference voltage to the PWM comparator. Once soft start is completed, the MODE pin will not change until V_{IN} or EN toggles.

表 1. MODE Pin Settings

MODE Pin	Light Load Operation Mode
Short to GND (<50kΩ)	Eco-mode™ control scheme
Floating (>350kΩ)	FCCM

7.3.2.1 Eco-mode™ Control Scheme

When MODE pin is short to GND, the TPS56637 is designed with Eco-mode™ control scheme to maintain high light load efficiency. As the output current decreases from heavy load condition, the inductor current is also reduced and eventually comes to point that its rippled valley touches zero level, which is the boundary between continuous conduction and discontinuous conduction modes. The rectifying MOSFET is turned off when the zero inductor current is detected. As the load current further decreases the converter runs into discontinuous conduction mode. The on-time is kept almost the same as it was in the continuous conduction mode so that it takes longer time to discharge the output capacitor with smaller load current to the level of the reference voltage. This makes the switching frequency lower, proportional to the load current, and keeps the light load efficiency high. The transition point to the light load operation $I_{OUT(LL)}$ current can be calculated in [公式 1](#)

$$I_{OUT(LL)} = \frac{1}{2 \cdot L \cdot f_{SW}} \cdot \frac{(V_{IN} - V_{OUT}) \cdot V_{OUT}}{V_{IN}} \quad (1)$$

7.3.2.2 FCCM Control

When MODE pin is floating, the TPS56637 is designed to operate in forced continuous conduction mode (FCCM) during light load conditions. During FCCM, the switching frequency is maintained at an a quasi-fixed level over the entire load range which is suitable for applications requiring tight control of the switching frequency and output voltage ripple at the cost of lower efficiency under light load. For some audio application, this mode can help avoid switching frequency drop into audible range that may introduce some "noise".

7.3.3 Soft Start and Pre-Biased Soft Start

The TPS56637 has an internal 2ms soft-start. When the EN pin becomes high and the MODE pin's reading and setting are finished, the internal soft-start function begins ramping up the reference voltage to the PWM comparator. If the output capacitor is pre-biased at startup, the devices initiate switching and start ramping up only after the internal reference voltage becomes greater than the feedback voltage V_{FB} . This scheme ensures that the converters ramp up smoothly into regulation point.

7.3.4 Enable and Adjusting Undervoltage Lockout

The EN pin provides electrical on and off control of the device. When the EN pin voltage exceeds the threshold voltage, the device begins operation. If the EN pin voltage is pulled below the threshold voltage, the regulator stops switching and enters the low-quiescent (I_Q) state.

The EN pin has an internal pull-up current source which allows the user to float the EN pin to enable the device. If an application requires control of the EN pin, use open-drain or open-collector output logic to interface with the pin.

The device implements internal undervoltage-lockout (UVLO) circuitry on the V_{IN} pin. The device is disabled when the V_{IN} pin voltage falls below the internal V_{IN} UVLO threshold. The internal V_{IN} UVLO threshold has a hysteresis of 600 mV.

If an application requires a higher UVLO threshold on the V_{IN} pin, then the EN pin can be configured as shown in [图 15](#). When using the external UVLO function, setting the hysteresis at a value greater than 600 mV is recommended.

The EN pin has a small pull-up current, I_p , which sets the default state of the pin to enable when no external components are connected. The pull-up current is also used to control the voltage hysteresis for the UVLO function because it increases by I_h when the EN pin crosses the enable threshold. Use [公式 2](#), and [公式 3](#) to calculate the values of R_1 and R_2 for a specified UVLO threshold. Once R_1 , R_2 settled down, the V_{EN} voltage need to be calculated by [公式 4](#) to make sure that it is lower than 5.5V with max V_{IN} , max I_p and max I_h .

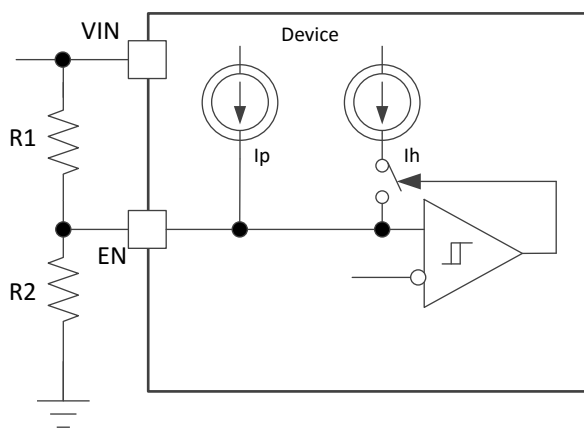


图 15. Adjustable V_{IN} Undervoltage Lockout

$$R_1 = \frac{V_{START} \frac{V_{ENfalling}}{V_{ENrising}} - V_{STOP}}{I_p \left(1 - \frac{V_{ENfalling}}{V_{ENrising}} \right) + I_h} \quad (2)$$

$$R_2 = \frac{R_1 \times V_{ENfalling}}{V_{STOP} - V_{ENfalling} + R_1 (I_p + I_h)} \quad (3)$$

$$V_{EN} = \frac{R_2 \times V_{IN} + R_1 R_2 (I_p + I_h)}{R_1 + R_2} \quad (4)$$

Where

- $I_p = 1 \mu A$
- $I_h = 4 \mu A$
- $V_{ENfalling} = 1.17 V$
- $V_{ENrising} = 1.21 V$

7.3.5 Current Protection and UV Protection

The output overcurrent limit (OCL) is implemented using a cycle by cycle valley detect control circuit. The switch current is monitored during off state by measuring the low-side FET drain to source voltage. This voltage is proportional to the switching current. During the on time of the high-side FET switch, the switch current increases at a linear rate determined by input voltage, output voltage, the on-time and the output inductor value. During the on time of the low side FET switch, this current decreases linearly. The average value of the switch current is the load current I_{OUT} . If the measured drain to source voltage of low-side FET is above the voltage proportional to current limit, the low side FET stays on until the current level which reduces the output current available. When the current is limited the output voltage tends to drop because the load demands is higher than what converter can support. When the output voltage falls below 65% of the target voltage, the UVP comparator detects it and shuts down the device after a wait time of 0.25ms, the device re-starts after a hiccup time of 25ms. In this type of valley detect control the load current is higher than the OCL threshold by half of the peak to peak inductor current. When the over current condition is removed, the output voltage returns to the regulated value.

7.3.6 Overvoltage Protection

When output voltage exceeds the over-voltage protection threshold, both high side and low side FET turn off, and the SW discharge path turns on. The device will not re-start until OVP event is removed (down by approximately "5%" hysteresis). After waiting for 25ms deglitch time, then re-soft-start process to power on the device will start.

7.3.7 UVLO Protection

UVLO protection monitors the internal regulator voltage. When the voltage is lower than UVLO threshold voltage, the device is shut down. This protection is non-latching.

7.3.8 Thermal Shutdown

The device monitors the internal die temperature. If this temperature exceeds the thermal shutdown threshold value (typically 165°C) the device shuts off. This is a non-latch protection. During start up, if the device temperature is higher than 165°C the device does not start switching and does not load the mode settings. If the device temperature goes higher than TRIP threshold after start up, it shuts down device immediately. Hysteresis is built, the device turns on after the device has been cooled by approximately 30°C.

7.3.9 Power Good

The power good (PG) pin is an open drain output. Once the FB pin voltage is between 90% and 110% of the internal reference voltage (V_{REF}) the PG is de-asserted and floats after a 0.2ms deglitch time. A pullup resistor of 100kΩ is recommended to pull it up to like 5V voltage. The PG pin is pulled low when FB pin voltage is lower than V_{UVP} or greater than V_{OVP} threshold, or in an event of thermal shutdown. The PG error (from high to low) deglitch time is 64μs.

7.4 Device Functional Modes

7.4.1 Standby Operation

The TPS56637 can be placed in standby mode by pulling the EN pin low. The device operates with a shutdown current of 2μA(typical) when in standby condition.

7.4.2 Normal Operation

When the input voltage is above the UVLO threshold voltage and EN pin is high, TPS56637 can operate in its normal switching modes. Normal continuous conduction mode (CCM) occurs when the minimum switch current is above 0 A. In CCM, the TPS56637 operates at a quasi-fixed frequency of 500kHz (typical).

Device Functional Modes (接下页)

7.4.3 Light Load Operation

When the MODE pin is selected to operate in FCCM mode, the converter operates in continuous conduction mode (FCCM) during light-load conditions. During FCCM, the switching frequency is maintained at an almost constant level over the entire load range which is suitable for applications requiring tight control of the switching frequency and output voltage ripple at the cost of lower efficiency under light load. If the MODE pin is selected to operate in Eco-mode™ control scheme, the device enters pulse skip mode after the valley of the inductor ripple current crosses zero. The Eco-mode™ control scheme maintains higher efficiency at light load with a lower switching frequency. If the TPS56637 works at Eco-mode™ and the load current is light enough to a specific value, the TPS56637 will enter ULQ™ mode that the TPS56637 will disable some internal circuits to increase the light load efficiency more higher.

8 Application and Implementation

注


Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

8.1 Application Information

The schematic of 图 16 shows a typical application for TPS56637. This design converts an input voltage range of 4.5 V to 28 V down to 5 V with a maximum output current of 6 A.

8.2 Typical Application

The application schematic in 图 16 shows the TPS56637 4.5-V to 28-V Input, 5-V output converter design meeting the requirements for 6-A output. This circuit is available as the evaluation module (EVM). The sections provide the design procedure.

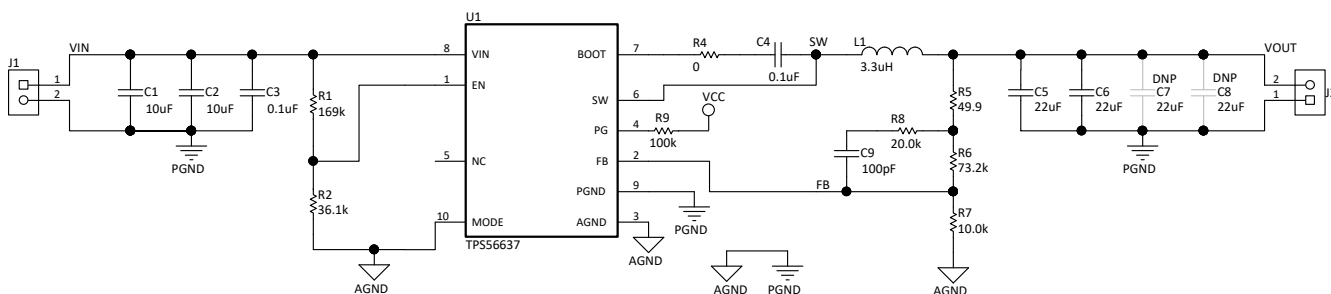

Copyright © 2017, Texas Instruments Incorporated

图 16. TPS56637 5-V, 6-A Reference Design

8.2.1 Design Requirements

表 2 shows the design parameters for this application.

表 2. Design Parameters

PARAMETER	EXAMPLE VALUE
Input voltage range	4.5 to 28V
Output voltage	5V
Transient response, 6-A load step	$\Delta V_{OUT} = \pm 5\%$
Input ripple voltage	200 mV
Output ripple voltage	<30 mV
Output current rating	6A
Operating frequency	500 kHz

8.2.2 Detailed Design Procedure

8.2.2.1 Output Voltage Resistors Selection

The output voltage is set with a resistor divider from the output node to the V_{FB} pin. TI recommends to use 1% tolerance or better divider resistors. Start by using 公式 5 to calculate V_{OUT} .

To improve efficiency at very light loads consider using larger value resistors, too high of resistance will be more susceptible to noise and voltage errors from the V_{FB} input current will be more noticeable.

$$V_{OUT} = 0.6 \times \left(1 + \frac{R6}{R7} \right)$$

(5)

8.2.2.2 Output Filter Selection

The LC filter used as the output filter has double pole at:

$$f_p = \frac{1}{2\pi\sqrt{L_{OUT} \times C_{OUT}}} \quad (6)$$

At low frequencies, the overall loop gain is set by the output set-point resistor divider network and the internal gain of the device. The low frequency phase is 180 degrees. At the output filter pole frequency, the gain rolls off at a –40 dB per decade rate and the phase drops rapidly. D-CAP3 introduces a high frequency zero that reduces the gain roll off to –20 dB per decade and increases the phase to 90 degrees one decade above the zero frequency. The inductor and capacitor for the output filter must be selected so that the double pole of 公式 6 is located below the high frequency zero but close enough that the phase boost provided by the high frequency zero provides adequate phase margin for a stable circuit. To meet this requirement use the values recommended in 表 3.

表 3. Recommended Component Values

OUTPUT VOLTAGE (V)	R6 (kΩ)	R7 (kΩ)	L1 (μH)			C5 + C6 (μF)	C9 (pF)	R8 (kΩ)
			MIN	TYP	MAX			
1.05	7.5	10.0	TBD	1	TBD	66	TBD	TBD
1.2	10	10.0	TBD	1	TBD	66	TBD	TBD
1.8	20	10.0	TBD	1.2	TBD	66	TBD	TBD
3.3	45.3	10.0	TBD	2.2	TBD	44	100	20
5	73.2	10.0	TBD	3.3	TBD	44	100	20
12	191	10.0	TBD	4.7	TBD	66	68	20

The inductor peak-to-peak ripple current, peak current and RMS current are calculated using 公式 7, 公式 8, and 公式 9. The inductor saturation current rating must be greater than the calculated peak current and the RMS or heating current rating must be greater than the calculated RMS current.

Use 500 kHz for f_{SW} . Make sure the chosen inductor is rated for the peak current of 公式 8 and the RMS current of 公式 9.

$$I_{P-P} = \frac{V_{OUT}}{V_{IN(MAX)}} \cdot \frac{V_{IN(MAX)} - V_{OUT}}{L_O \cdot f_{SW}} \quad (7)$$

$$I_{PEAK} = I_O + \frac{I_{P-P}}{2} \quad (8)$$

$$I_{LO(RMS)} = \sqrt{I_O^2 + \frac{1}{12} I_{P-P}^2} \quad (9)$$

For this design example, the calculated peak current is 6.86A and the calculated RMS current is 6.02 A. The inductor used is IHLP3232DZER3R3M11 with a peak current rating of 10.5A and an RMS current rating of 9.7A.

The capacitor value and ESR determines the amount of output voltage ripple. The TPS56637 is intended for use with ceramic or other low ESR capacitors. Recommended values range from 20 μF to 68 μF. Use 公式 10 to determine the required RMS current rating for the output capacitor.

$$I_{CO(RMS)} = \frac{V_{OUT} \cdot (V_{IN} - V_{OUT})}{\sqrt{12} \cdot V_{IN} \cdot L_O \cdot f_{SW}} \quad (10)$$

For this design two MuRata GRM32ER71E226KE15L 22-μF output capacitors are used. The calculated RMS current is 0.498A and each output capacitor is rated for 4 A.

8.2.2.3 Input Capacitor Selection

The TPS56637 requires an input decoupling capacitor and a bulk capacitor is needed depending on the application. TI recommends a ceramic capacitor over 10 μF for the decoupling capacitor. An additional 0.1- μF capacitor (C3) from VIN to PGND pin is recommended to provide additional high frequency filtering. The capacitor voltage rating needs to be greater than the maximum input voltage. The input voltage ripple can be calculated using 公式 11. Using the design example values, $I_{\text{outmax}} = 6 \text{ A}$, $C_{\text{in}} = 10 \mu\text{F} \times 2$, $F_{\text{sw}} = 500 \text{ kHz}$, yields an input voltage ripple of 150 mV.

$$\Delta V_{\text{in}} = \frac{I_{\text{outmax}} \cdot 0.25}{C_{\text{in}} \cdot f_{\text{sw}}} \tag{11}$$

8.2.2.4 Bootstrap Capacitor Selection

A 0.1- μF ceramic capacitor must be connected between the BOOT to SW pin for proper operation. TI recommends to use a ceramic capacitor.

8.2.3 Application Curves

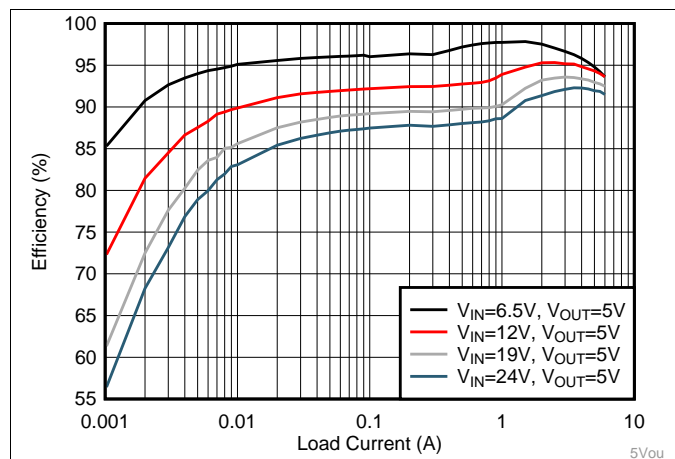


图 17. Efficiency

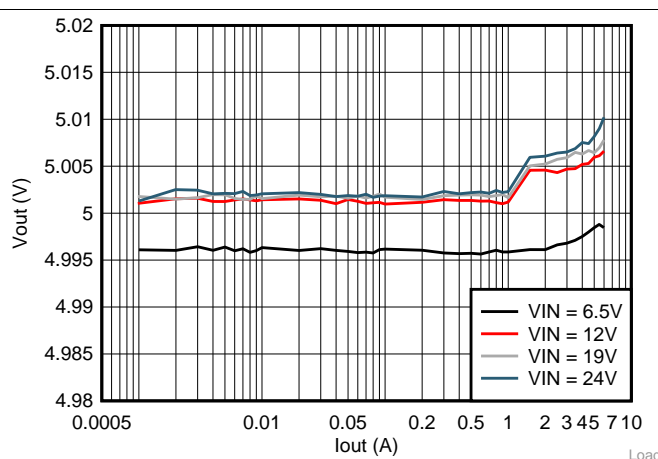


图 18. Load Regulation

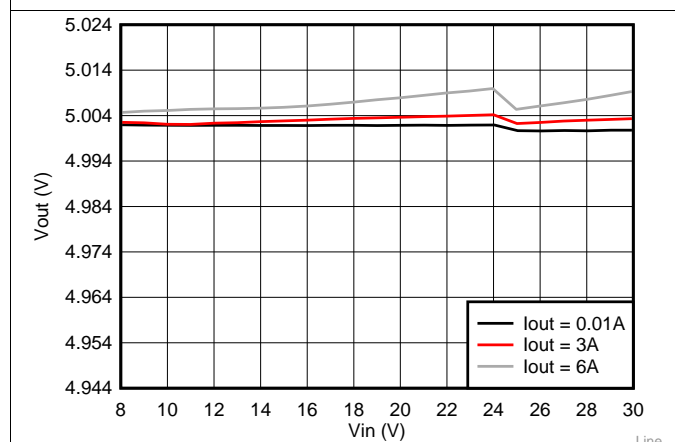


图 19. Line Regulation













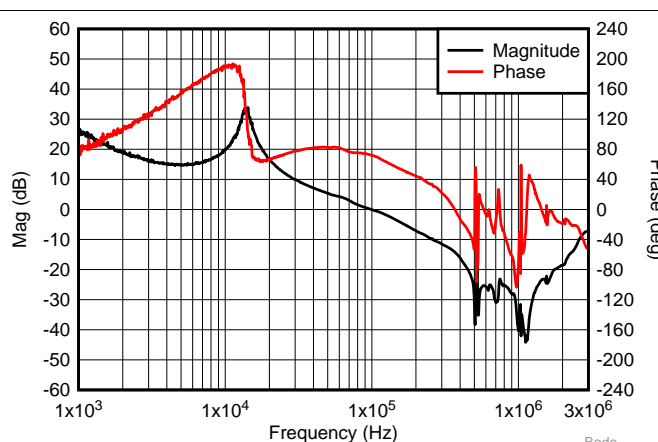


图 20. Bode Plot

ADVANCE INFORMATION

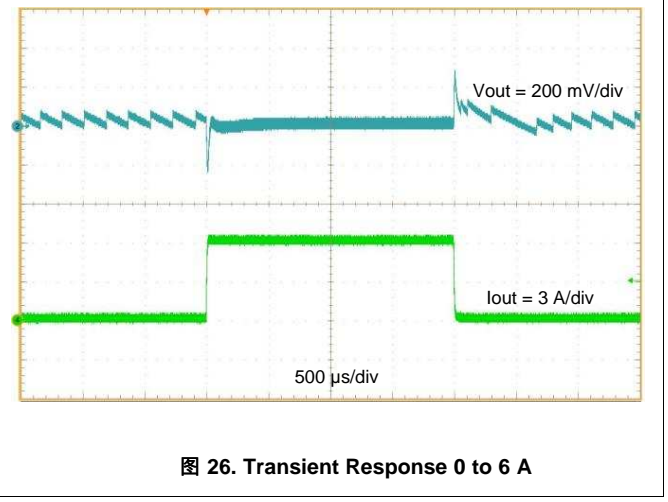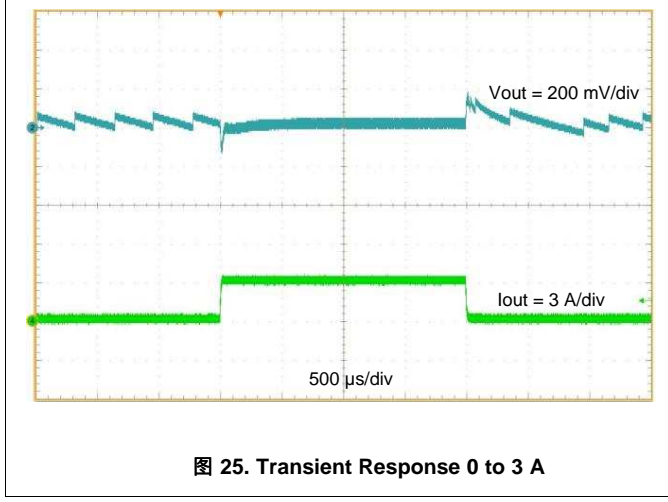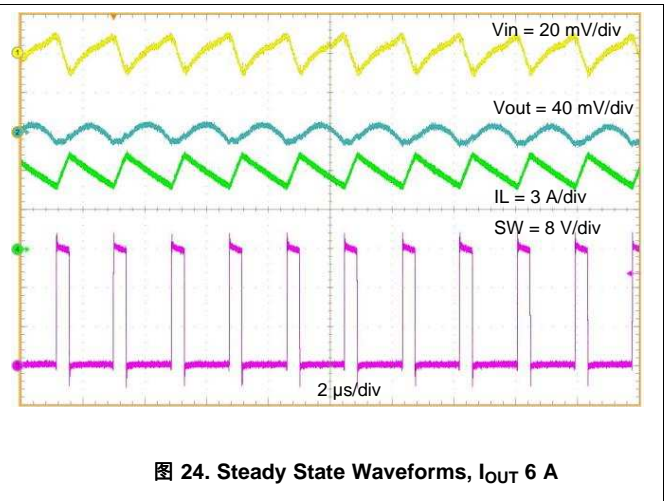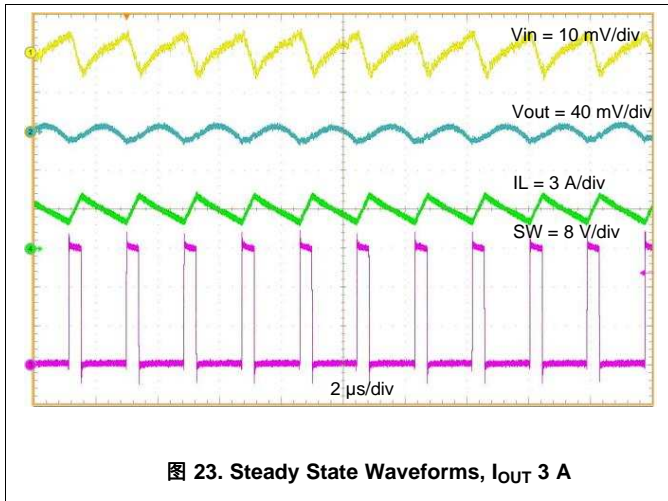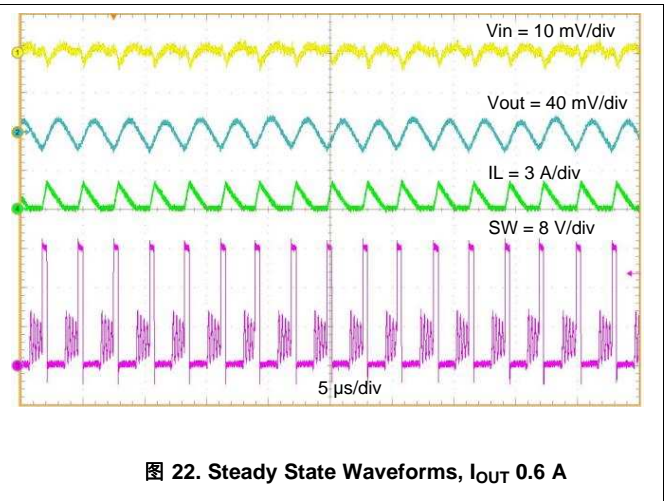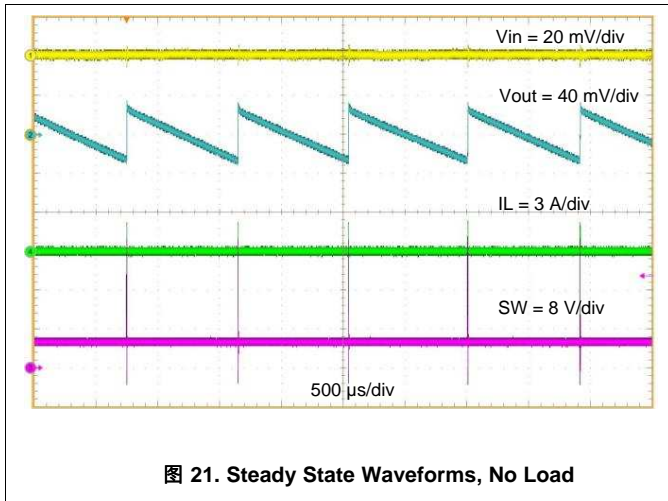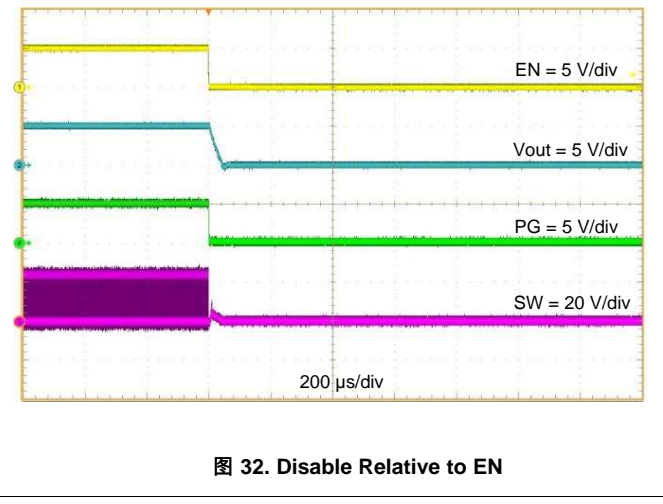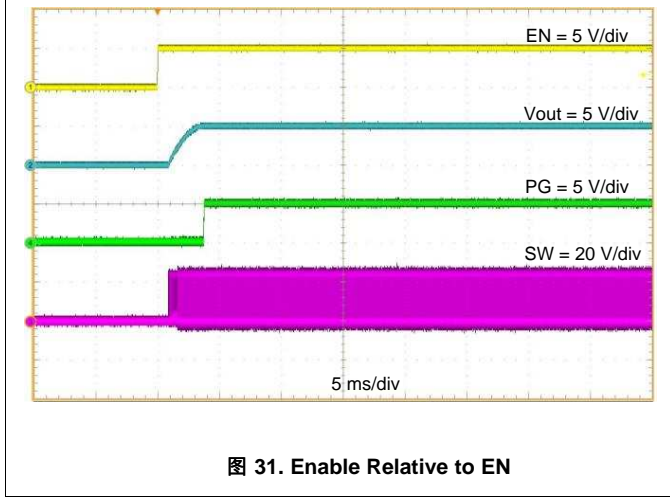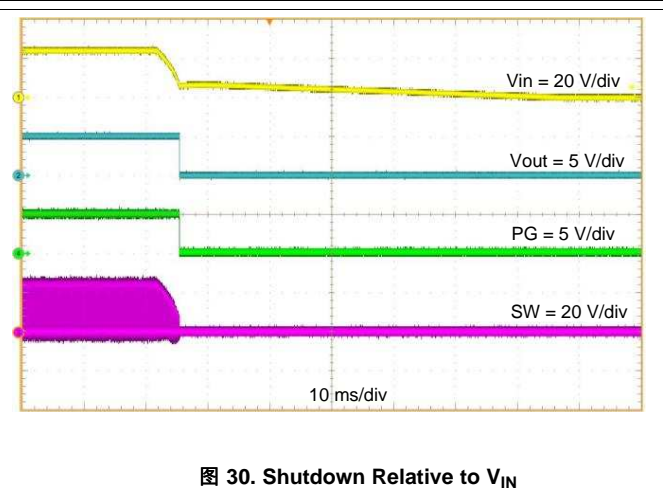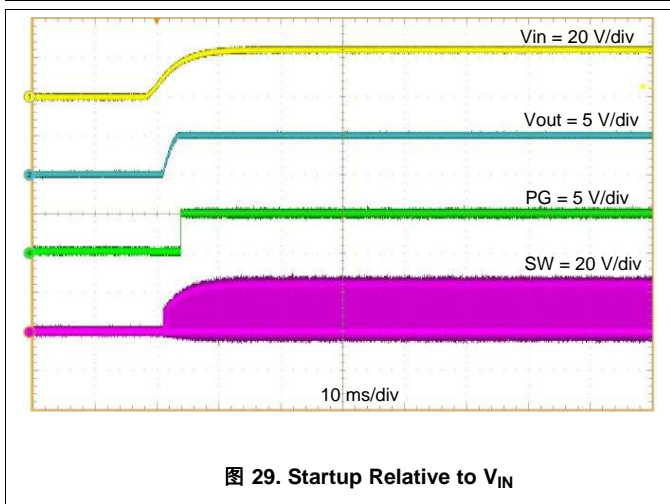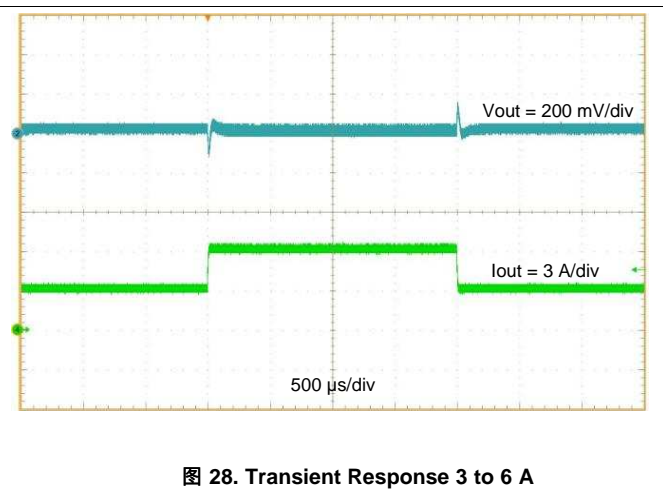

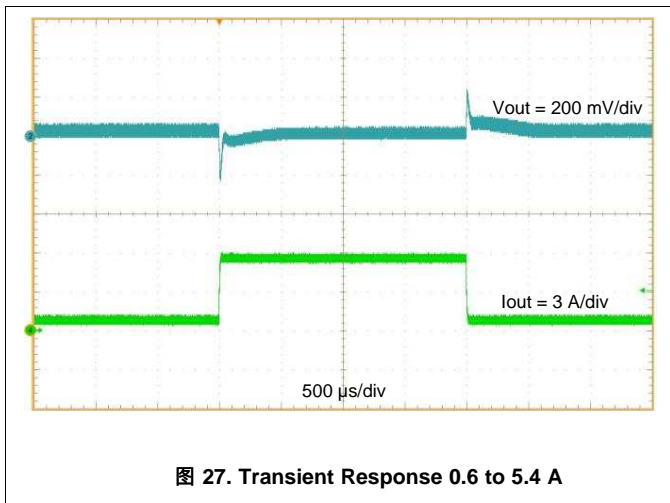

ADVANCE INFORMATION

9 Power Supply Recommendations


The TPS56637 is designed to operate from input supply voltage in the range of 4.5 V to 28 V. Buck converters require the input voltage to be higher than the output voltage for proper operation. Input supply current must be appropriate for the desired output current. If the input voltage supply is located far from the TPS56637 circuit, some additional input bulk capacitance is recommended.

10 Layout

10.1 Layout Guidelines

1. Recommend a four-layer or six-layer PCB for good thermal performance and with maximum ground plane. 3"x 3", four-layer PCB with 2-oz. copper used as example.
2. VIN and GND traces should be as wide as possible to reduce trace impedance. The wide areas are also of advantage from the view point of heat dissipation.
3. Putting at least two vias for VIN and GND traces, and as close as possible to the pins, which will make higher improvement of the thermal
4. The input capacitor and output capacitor should be placed as close to the device as possible to minimize trace impedance.
5. Provide sufficient vias for the input capacitor and output capacitor.
6. Keep the SW trace as physically short and wide as practical to minimize radiated emissions.
7. Do not allow switching current to flow under the device.
8. A separate VOUT path should be connected to the upper feedback resistor.
9. Make a Kelvin connection to the GND pin for the feedback path.
10. Voltage feedback loop should be placed away from the high-voltage switching trace, and preferably has ground shield.
11. The trace of the VFB node should be as small as possible to avoid noise coupling.
12. The GND trace between the output capacitor and the GND pin should be as wide as possible to minimize its trace impedance.

10.2 Layout Example

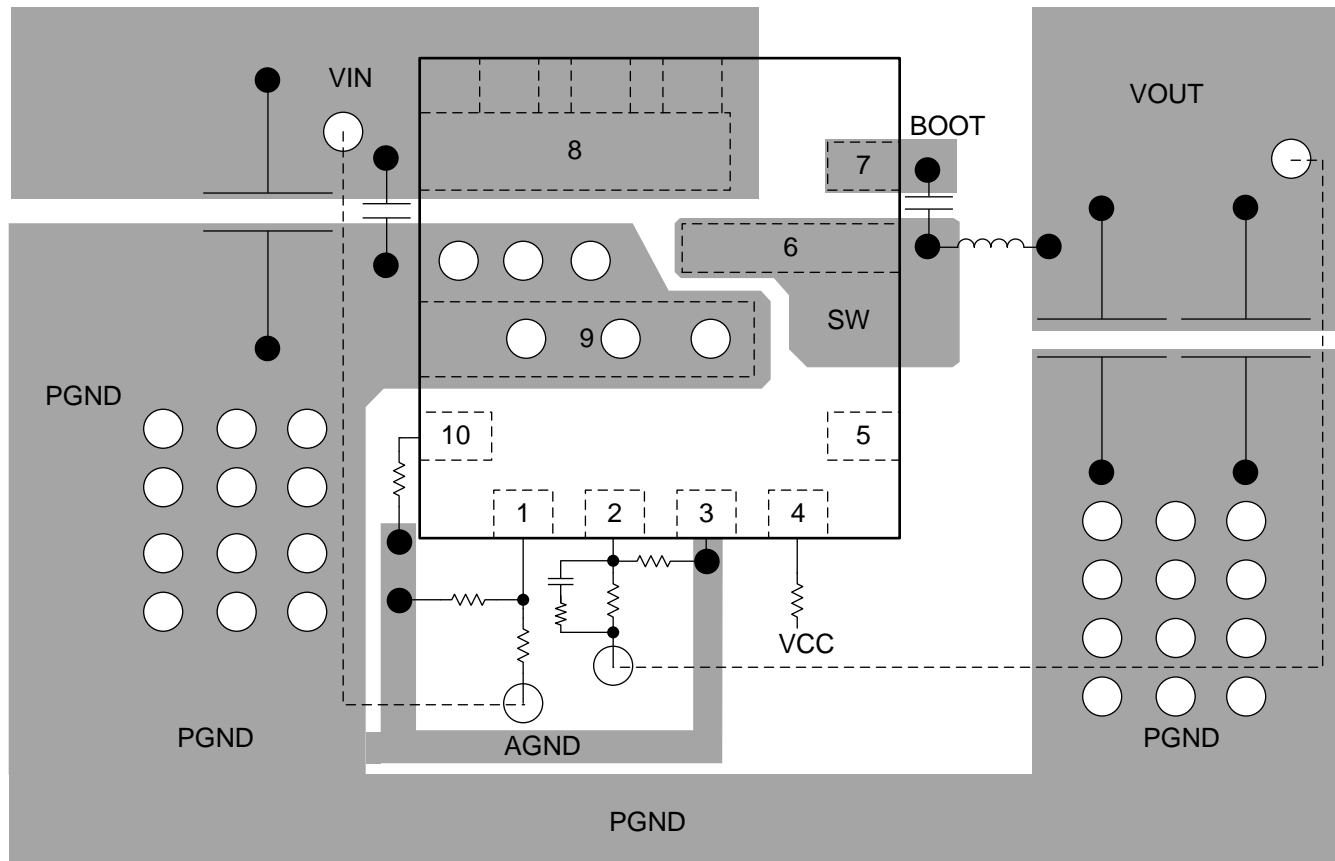

Copyright © 2017, Texas Instruments Incorporated

图 33. TPS56637 Layout

ADVANCE INFORMATION

11 器件和文档支持

11.1 文档支持

11.1.1 相关文档

请参阅如下相关文档：德州仪器 (TI)， [《TPS56637EVM-029 6A 稳压器评估模块》 用户指南](#)

11.2 接收文档更新通知

要接收文档更新通知，请导航至 [TI.com.cn](#) 上的器件产品文件夹。单击右上角的 [通知我](#) 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

11.3 社区资源

下列链接提供到 TI 社区资源的连接。链接的内容由各个分销商“按照原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的 [《使用条款》](#)。

TI E2E™ 在线社区 [TI 的工程师对工程师 \(E2E\) 社区](#)。此社区的创建目的在于促进工程师之间的协作。在 [e2e.ti.com](#) 中，您可以咨询问题、分享知识、拓展思路并与同行工程师一道帮助解决问题。

设计支持 [TI 参考设计支持](#) 可帮助您快速查找有帮助的 E2E 论坛、设计支持工具以及技术支持的联系信息。

11.4 商标

D-CAP3, Eco-mode, HotRod, ULQ, E2E are trademarks of Texas Instruments.

11.5 静电放电警告



ESD 可能会损坏该集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理措施和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

11.6 术语表

[SLYZ022](#) — TI 术语表。

这份术语表列出并解释术语、缩写和定义。

12 机械、封装和可订购信息

以下页面包含机械、封装和可订购信息。这些信息是指定器件的最新可用数据。数据如有变更，恕不另行通知，且不会对此文档进行修订。如需获取此产品说明书的浏览器版本，请查阅左侧的导航栏。

12.1 Package Option Addendum

12.1.1 Packaging Information


Orderable Device	Status ⁽¹⁾	Package Type	Package Drawing	Pins	Package Qty	Eco Plan ⁽²⁾	Lead/Ball Finish ⁽³⁾	MSL Peak Temp ⁽⁴⁾	Op Temp (°C)	Device Marking ⁽⁵⁾⁽⁶⁾
XTPS56637RPAR	PRE_PROD	VQFN-HR	RPA	10	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR	-40 to 125	X56637

- (1) The marketing status values are defined as follows:
ACTIVE: Product device recommended for new designs.
LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.
NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.
PRE_PROD Unannounced device, not in production, not available for mass market, nor on the web, samples not available.
PREVIEW: Device has been announced but is not in production. Samples may or may not be available.
OBSELETE: TI has discontinued the production of the device.
- (2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.
TBD: The Pb-Free/Green conversion plan has not been defined.
Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.
Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.
Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)
- (3) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.
- (4) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.
- (5) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device
- (6) Multiple Device markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.


Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

12.1.2 Tape and Reel Information

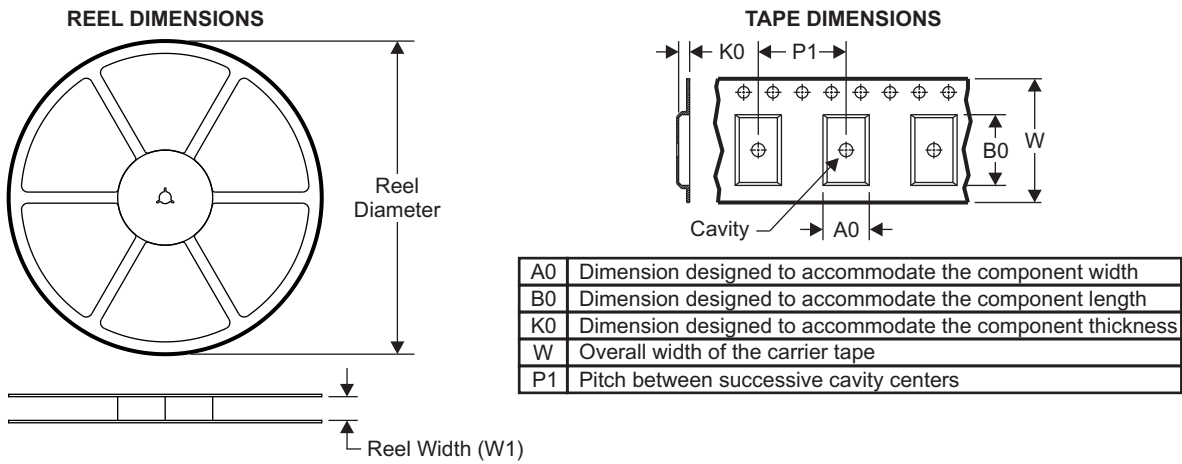


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

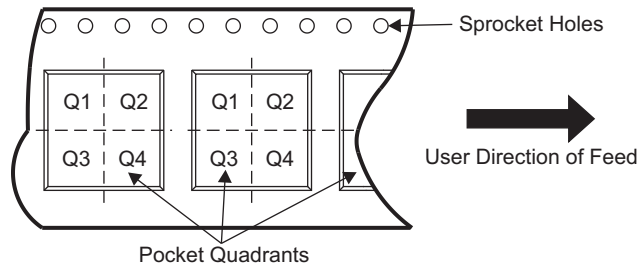

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
XTPS56637RPAR	VQFN-HR	RPA	10	3000	330	12	3.3	3.3	1.1	8	9.1	2

ADVANCE INFORMATION

TAPE AND REEL BOX DIMENSIONS

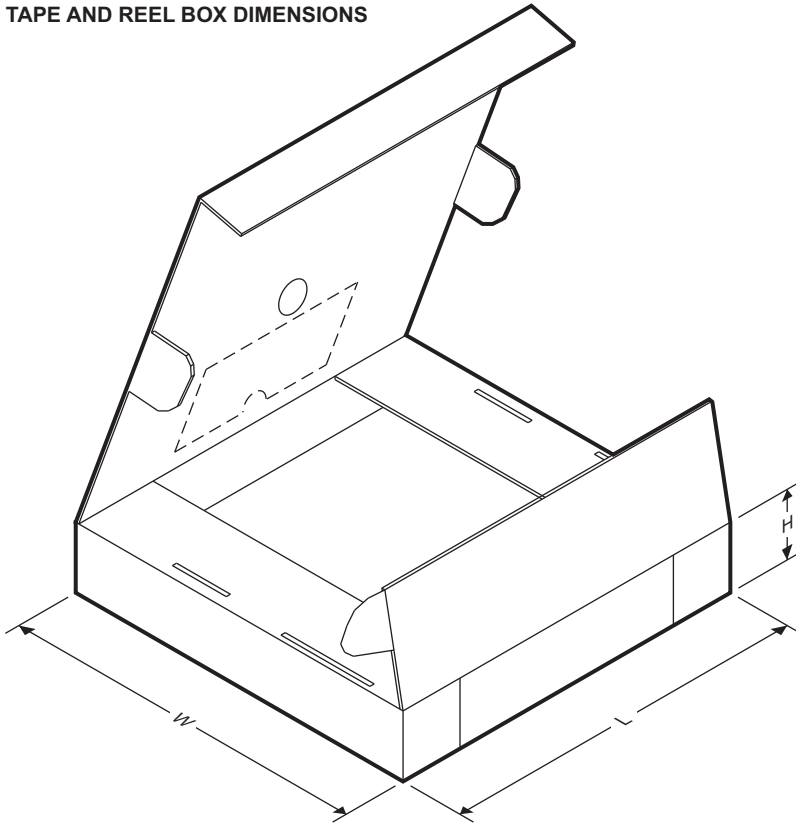

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
XTPS56637RPAR	VQFN-HR	RPA	10	3000	367	367	35

ADVANCE INFORMATION

重要声明和免责声明

TI 均以“原样”提供技术性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证其中不含任何瑕疵，且不做任何明示或暗示的担保，包括但不限于对适销性、适合某特定用途或不侵犯任何第三方知识产权的暗示担保。

所述资源可供专业开发人员应用TI 产品进行设计使用。您将对以下行为独自承担全部责任：(1) 针对您的应用选择合适的TI 产品；(2) 设计、验证并测试您的应用；(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。所述资源如有变更，恕不另行通知。TI 对您使用所述资源的授权仅限于开发资源所涉及TI 产品的相关应用。除此之外不得复制或展示所述资源，也不提供其它TI 或任何第三方的知识产权授权许可。如因使用所述资源而产生任何索赔、赔偿、成本、损失及债务等，TI 对此概不负责，并且您须赔偿由此对TI 及其代表造成的损害。

TI 所提供产品均受TI 的销售条款 (<http://www.ti.com.cn/zh-cn/legal/termsofsale.html>) 以及ti.com.cn上或随附TI产品提供的其他可适用条款的约束。TI提供所述资源并不扩展或以其他方式更改TI 针对TI 产品所发布的可适用的担保范围或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122
Copyright © 2019 德州仪器半导体技术（上海）有限公司

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
TPS56637RPAR	PREVIEW	VQFN-HR	RPA	10	3000	TBD	Call TI	Call TI	-40 to 125		
XTPS56637RPAT	ACTIVE	VQFN-HR	RPA	10	250	TBD	Call TI	Call TI	-40 to 125		Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=100ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer:The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

重要声明和免责声明

TI 均以“原样”提供技术性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证其中不含任何瑕疵，且不做任何明示或暗示的担保，包括但不限于对适销性、适合某特定用途或不侵犯任何第三方知识产权的暗示担保。

所述资源可供专业开发人员应用TI 产品进行设计使用。您将对以下行为独自承担全部责任：(1) 针对您的应用选择合适的TI 产品；(2) 设计、验证并测试您的应用；(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。所述资源如有变更，恕不另行通知。TI 对您使用所述资源的授权仅限于开发资源所涉及TI 产品的相关应用。除此之外不得复制或展示所述资源，也不提供其它TI 或任何第三方的知识产权授权许可。如因使用所述资源而产生任何索赔、赔偿、成本、损失及债务等，TI 对此概不负责，并且您须赔偿由此对TI 及其代表造成的损害。

TI 所提供产品均受TI 的销售条款 (<http://www.ti.com.cn/zh-cn/legal/termsofsale.html>) 以及ti.com.cn上或随附TI产品提供的其他可适用条款的约束。TI提供所述资源并不扩展或以其他方式更改TI 针对TI 产品所发布的可适用的担保范围或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122
Copyright © 2019 德州仪器半导体技术（上海）有限公司