

+9 to +32 dBm

# Limiter

50Ω Broadband 0.5 to 520 MHz

RLM-521-2WL+



CASE STYLE: TT1224


## Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Input Power	2W
Permanent damage may occur if any of these limits are exceeded.	

## Pin Connections

INPUT	1
OUTPUT	4
GROUND	2,3,5,6

## Outline Drawing

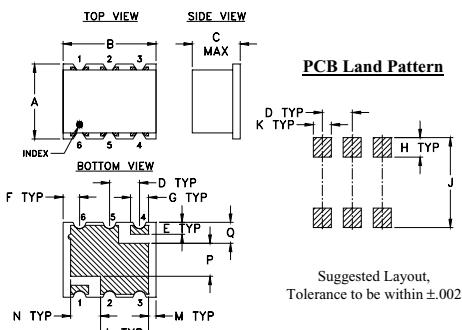


## Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H
.25	.31	.16	.100	.040	.055	.060	.065
6.35	7.87	4.06	2.54	1.02	1.40	1.52	1.65

J	K	L	M	N	P	Q	wt.
.300	.060	.160	.025	.100	.110	.070	grams
7.62	1.52	4.06	0.64	2.54	2.79	1.78	0.16

## Demo Board MCL P/N: TB-393 Suggested PCB Layout (PL-258)

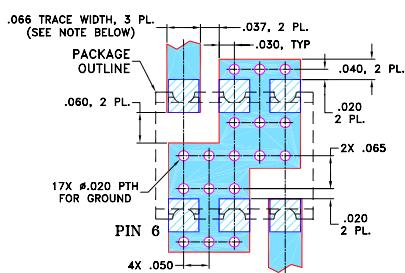

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.  
DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## Features

- wideband, 0.5 to 520 MHz
- low insertion loss 0.2 dB typ.
- fast recovery time, 3.7 nsec typ.
- excellent VSWR 1.2:1 typ.
- low output power, 7 dBm typ.
- aqueous washable

## +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

## Electrical Specifications

Parameter	Condition	Min.	Typ.	Max.	Units
Frequency Range		0.5	—	520	MHz
<b>Linear Range</b>					
Max Input Power	less than 0.1 dB compression	—	—	-10	dBm
Insertion Loss	less than -10 dBm input power	—	0.2	0.7	dB
VSWR	less than -10 dBm input power	—	1.2	1.78	:1
<b>Limiting Range</b>					
Input Power	>1dB compression filtered signal frequency	+9	—	+32	dBm
Output Power	Input Power Range (dBm)	—	+7	—	dBm
△ Output/ △ 1dB Input	9 to 20 20 to 25 25 to 30 30 to 32	—	0.2 0.3 0.3 0.3	—	dB/dB
Recovery Time	1 watt pulse 50 μsec pw 1kHz duty cycle recovery to within 90% of final value.	—	3.7	—	nsec
Response Time	-30 to +30 dBm input 50 μsec PW 1 kHz duty cycle	—	5.8	—	nsec

## Typical Performance Data

Freq. (MHz)	I. Loss (dB) in Linear Range at -10 dBm	VSWR (:1) in Linear Range at -10 dBm	Power Output (dBm)				△ Output / △ 1dB Input				
			+9 dBm Input	+20 dBm Input	+25 dBm Input	+30 dBm Input	+32dBm Input	+9 to +20 dBm Input	+20 to +25 dBm Input	+25 to +30 dBm Input	+30 to +32 dBm Input
0.50	0.08	1.15	-0.14	2.93	4.33	6.54	7.67	0.28	0.28	0.44	0.57
0.60	0.07	1.12	-0.11	2.73	4.12	6.05	7.02	0.26	0.28	0.39	0.49
0.70	0.08	1.10	-0.08	2.61	3.97	5.76	6.67	0.24	0.27	0.36	0.46
0.80	0.07	1.07	-0.07	2.53	3.88	5.58	6.47	0.24	0.27	0.34	0.45
0.90	0.06	1.02	-0.06	2.50	3.81	5.46	6.34	0.23	0.26	0.33	0.44
1.00	0.05	1.02	-0.05	2.45	3.80	5.37	6.22	0.23	0.27	0.31	0.43
1.00	0.05	1.02	-0.05	2.45	3.80	5.37	6.22	0.23	0.27	0.31	0.43
3.00	0.05	1.02	0.35	2.36	3.66	5.07	5.87	0.18	0.26	0.28	0.40
5.00	0.07	1.04	0.59	2.39	3.70	5.18	5.98	0.16	0.26	0.30	0.40
7.00	0.10	1.07	0.73	2.46	3.79	5.35	6.18	0.16	0.27	0.31	0.42
10.00	0.10	1.08	0.81	2.59	4.02	5.79	6.69	0.16	0.29	0.35	0.45
60.00	0.13	1.12	0.65	2.26	3.54	4.68	5.42	0.19	0.26	0.23	0.37
100.00	0.17	1.17	0.75	2.70	4.16	6.70	7.83	0.14	0.29	0.51	0.57
250.00	0.20	1.22	0.59	2.78	4.23	5.64	6.33	0.18	0.29	0.28	0.35
300.00	0.24	1.27	0.58	2.40	3.66	5.03	5.60	0.15	0.25	0.27	0.29
400.00	0.28	1.33	0.53	2.75	4.06	5.29	5.70	0.22	0.26	0.25	0.21
500.00	0.33	1.39	0.53	2.97	4.31	5.25	5.50	0.19	0.27	0.19	0.13
520.00	0.38	1.45	0.48	2.99	4.25	5.19	5.35	0.22	0.26	0.19	0.08

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE.  
FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.  
DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK







### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

**Mini-Circuits®**

[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A  
M151107  
ED-14416  
RLM-521-2WL+  
AV/CP/AM  
150923  
Page 1 of 2

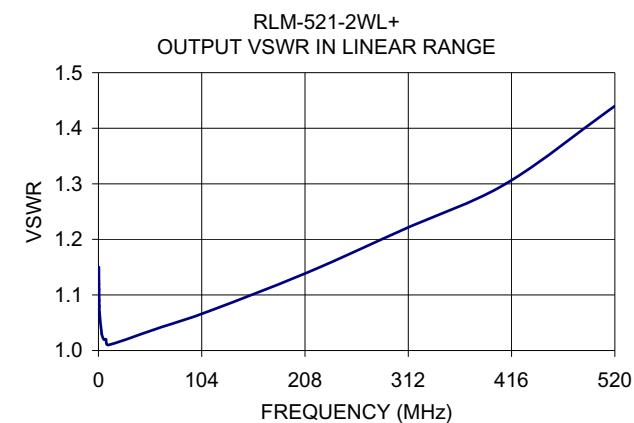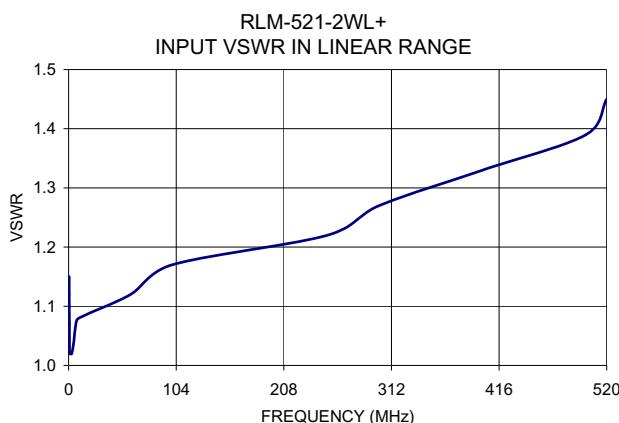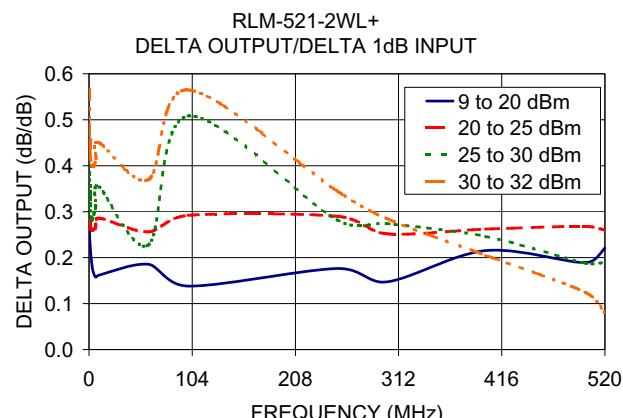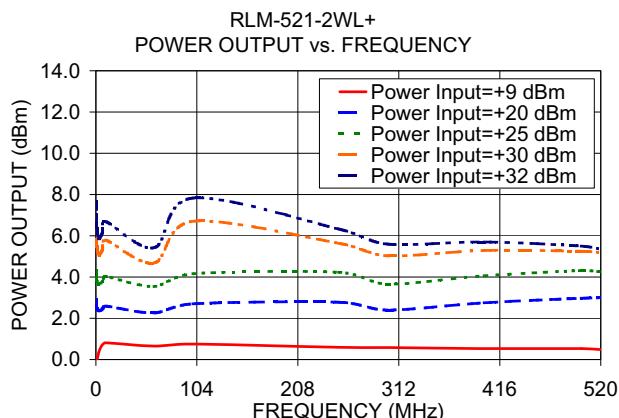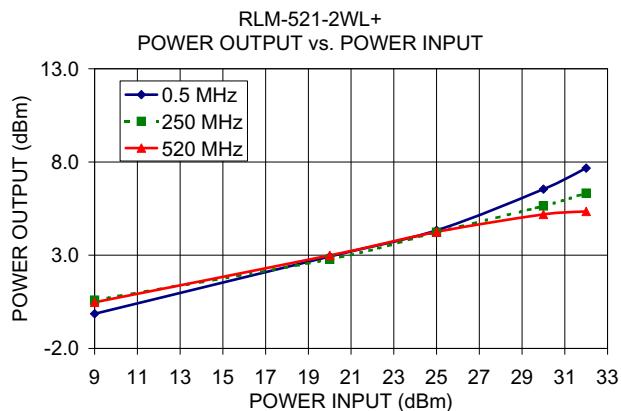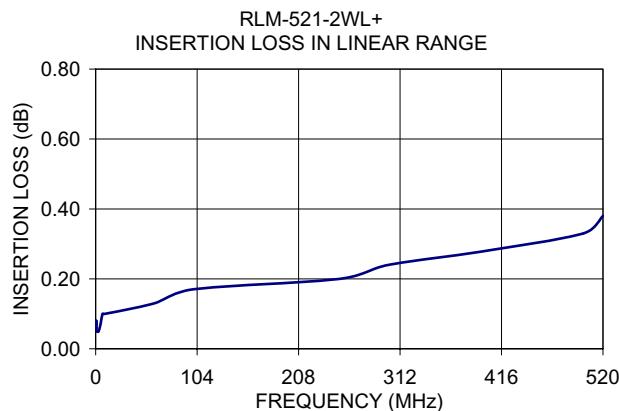

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)