
Surface Mount

Bandpass Filter

SXBP-70+

50Ω 63 to 77 MHz



CASE STYLE: HF1139

Maximum Ratings

Operating Temperature	-40ºC to 85ºC
Storage Temperature	-55ºC to 100ºC
RF Power Input	0.5W Max.

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

INPUT	1
OUTPUT	8
GROUND	2, 3, 4, 5, 6, 7

Features

- linear phase, up to ±3.5 deg typ @ Fc ± 7.5 MHz
- good VSWR, 1.2:1 typ @ passband
- sharp insertion roll off
- shielded case
- aqueous washable


Applications

- military hi-rel systems
- high rejection applications
- image rejection
- IF signal processing

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Outline Drawing

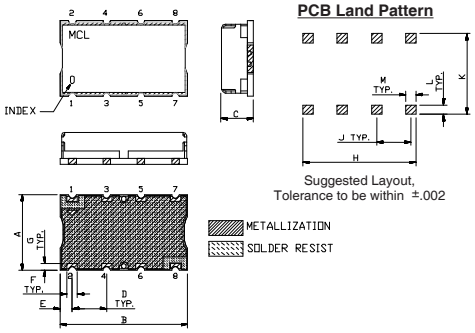


Outline Dimensions (inch / mm)

A	B	C	D	E	F
.44	.74	.27	.200	.07	.060
11.18	18.80	6.86	5.08	1.78	1.52

G	H	J	K	L	M	wt.
.040	.660	.200	.470	.055	.060	grams
1.02	16.76	5.08	11.94	1.40	1.52	3.0

Demo Board MCL P/N: TB-368
Suggested PCB Layout (PL-230)

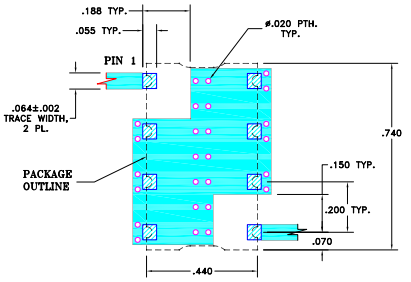

NOTE:
1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS: .025"±.002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.


DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK


Bandpass Filter Electrical Specifications (T_{AMB}= 25ºC)

CENTER FREQ. (MHz)	PASSBAND (MHz)	STOPBANDS (MHz)				MAXIMUM DEVIATION FROM LINEAR PHASE (deg.)	VSWR (:1)		
	(Loss < 1.5dB)	Loss > 20dB		Loss > 40dB			Passband		Stopband
Fc	F1 - F2	F3	F4	F5	F6	Fc ± 7.5MHz	Typ.	Max.	Typ.
70	63 - 77	50	95	19	195 -1000	±7	1.2	1.7	20

Typical Frequency Response

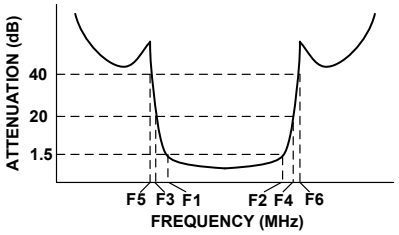


Functional Schematic

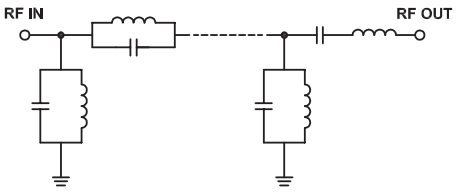


Typical Performance Data at 25ºC

Frequency (MHz)	Insertion Loss (dB) $\bar{x}$	Insertion Loss (dB) σ	Return Loss (dB)	Frequency (MHz)	Deviation from Linear Phase (deg.)
0.5	87.62	2.80	0.04	62.5	3.34
19.0	45.25	0.29	0.06	63.0	1.96
50.0	29.54	0.83	0.38	64.0	0.13
54.0	18.44	0.24	1.12	65.0	-1.01
56.0	8.44	0.18	3.23	66.0	-1.67
57.0	5.06	0.14	6.08	67.0	-1.90
58.0	3.00	0.12	11.27	68.0	-1.81
60.0	1.55	0.09	24.15	69.0	-1.47
63.0	1.14	0.04	17.14	70.0	-0.99
70.0	0.95	0.03	17.72	71.0	-0.44
77.0	1.19	0.03	20.65	72.0	0.17
82.0	2.69	0.09	12.54	72.5	0.40
84.0	5.38	0.17	6.03	73.0	0.62
86.0	10.12	0.29	3.04	74.0	1.00
89.0	20.07	0.60	1.49	75.0	1.09
95.0	30.99	0.53	0.79	76.0	0.96
195.0	45.75	0.38	0.21	77.0	0.34
1000.0	57.28	0.68	0.44	77.5	-0.30


INSERTION LOSS

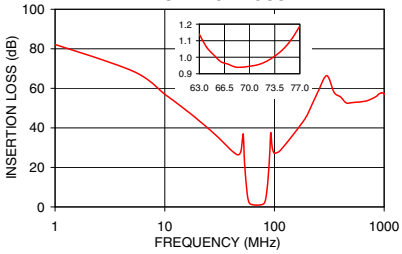

RETURN LOSS

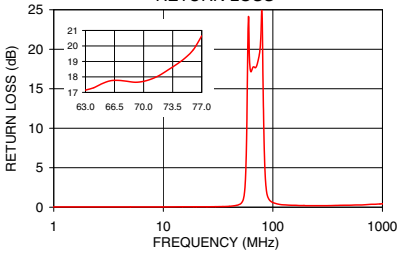

INSERTION PHASE & DEVIATION FROM LINEAR PHASE

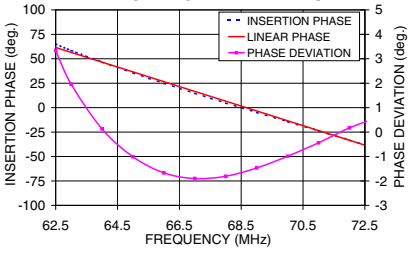

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp