Surface Mount

RF Transformer

0.3 to 300 MHz

T5-1T+



+RoHS Compliant The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature	-20°C to 85°C		
Storage Temperature	-55°C to 100°C		
RF Power	0.25W		
DC Current	30mA		
Pormonant damage may occur if any	of those limits are eveneds		

Pin Connections

PRIMARY DOT	4
PRIMARY	6
SECONDARY DOT	3
SECONDARY	1
SECONDARY CT	2
NOT USED	5

Features

- wideband, 0.3 to 300 MHz
- · good return loss
- also available with surface mount gull wing (KK81) plug-in (X65) leads

Applications


- impedance matching
- push-pull amplifiers

Transformer Electrical Specifications

Ω RATIO (Secondary/Primary)	FREQUENCY (MHz)	INSERTION LOSS*		
		3 dB MHz	2 dB MHz	1 dB MHz
5	0.3-300	0.3-300	0.6-200	5-100

^{*}Insertion Loss is referenced to mid-band loss, 0.7 dB typ.

Outline Drawing





Outline Dimensions (inch)

F	E	D	C	B	A
. 020	. 042	. 010	. 23	. 27	. 30
0.51	1.07	0.25	5.84	6.86	7.62
wt grams	.036	.31	J .09	H .05	G .100

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	
0.30	1.91	6.84	
0.70	1.21	12.33	
3.00	0.79	16.14	
28.00	0.76	16.70	
73.00	0.87	17.90	
120.00	0.96	18.95	
170.00	1.05	19.50	
220.00	1.15	18.75	
270.00	1.28	16.62	
300.00	1.33	15.08	



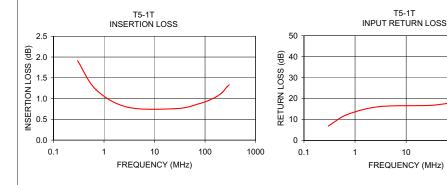

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

 C. The parts covered by this specification document are subject to Mini-Circuit satandard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

1000