

Power Splitter/Combiner

ZN4PD1-842-S+

4 Way-0° 50Ω 2100 to 8400 MHz

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	10W max.
Internal Dissipation	0.8 max.
DC Current	1.0 A (250mA for each port)

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

SUM PORT	3
PORT 1	1
PORT 2	2
PORT 3	4
PORT 4	5


Outline Drawing



Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
3.88	2.63	.65	.22	3.438	--	.125
98.55	66.80	16.51	5.59	87.33	--	3.18
H	J	K	L	M	wt	
--	.33	.50	.56	1.500	grams	
--	8.38	12.70	14.22	38.10	170	

Electrical Schematic

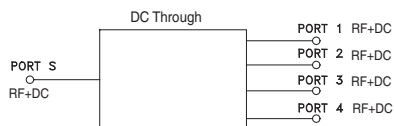

Features

- wide frequency band, 2100 to 8400 MHz
- low insertion loss, 1.0 dB typ.
- low amplitude unbalance 0.3 dB typ.
- low phase unbalance 4 deg. typ.

Applications

- high band PCS
- CATV
- defense communication
- WiFi
- Bluetooth



Generic photo used for illustration purposes only

CASE STYLE: UU846-2

Connectors Model
SMA ZN4PD1-842-S+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications




Electrical Specifications

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		2100		8400	MHz
Insertion Loss Above 6.0 dB	2400-6800 2100-8400	— —	0.8 1.3	1.3 1.9	dB
Isolation	2400-6800 2100-8400	18 12	24 19	—	dB
Phase Unbalance	2400-6800 2100-8400	— —	4 5	8 9	Degree
Amplitude Unbalance	2400-6800 2100-8400	— —	0.3 0.5	0.8 1.0	dB
VSWR Input	2400-6800 2100-8400	— —	1.6 1.6	—	:1
VSWR Output	2400-6800 2100-8400	— —	1.4 1.4	—	:1

Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)				Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3	VSWR 4
	S-1	S-2	S-3	S-4		1-2	2-3	3-4						
2100	6.60	6.59	6.52	6.59	0.08	15.87	19.20	15.90	0.49	1.73	1.45	1.48	1.43	1.44
2300	6.79	6.76	6.74	6.81	0.07	20.86	20.81	20.84	0.59	1.97	1.57	1.60	1.54	1.54
2600	7.12	7.06	7.04	7.11	0.08	24.91	23.52	24.60	0.61	2.17	1.72	1.76	1.69	1.69
3000	7.04	7.02	6.98	7.02	0.06	21.14	27.91	21.00	0.44	2.15	1.80	1.83	1.78	1.76
3400	6.79	6.81	6.80	6.82	0.03	20.64	32.78	20.64	0.53	1.93	1.75	1.72	1.74	1.73
3800	6.50	6.49	6.56	6.54	0.07	23.19	37.56	23.29	0.74	1.53	1.55	1.51	1.57	1.53
4200	6.37	6.36	6.42	6.39	0.06	26.54	44.81	26.93	0.76	1.18	1.35	1.32	1.39	1.36
4600	6.55	6.59	6.60	6.56	0.05	22.33	43.66	22.51	0.61	1.42	1.39	1.36	1.44	1.39
5000	6.86	6.95	6.98	6.91	0.12	20.43	35.61	20.56	0.70	1.55	1.40	1.40	1.46	1.44
5600	6.85	6.90	6.99	6.93	0.14	23.17	29.21	23.50	1.39	1.23	1.24	1.31	1.32	1.30
6200	6.70	6.76	6.81	6.74	0.11	26.28	26.94	26.87	1.37	1.43	1.13	1.17	1.16	1.15
6800	6.44	6.57	6.61	6.49	0.17	22.66	25.34	23.08	1.33	1.28	1.08	1.07	1.09	1.10
7400	6.56	6.58	6.81	6.67	0.25	16.91	25.18	16.93	1.20	1.08	1.11	1.09	1.13	1.15
8000	6.65	6.88	6.83	6.74	0.24	14.43	23.31	14.49	2.13	1.47	1.17	1.16	1.19	1.23
8400	7.25	7.41	7.35	7.26	0.16	14.16	21.42	14.09	3.03	1.83	1.20	1.12	1.15	1.16

1. Total Loss = Insertion Loss + 6dB splitter loss.

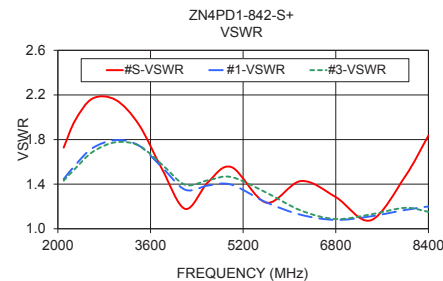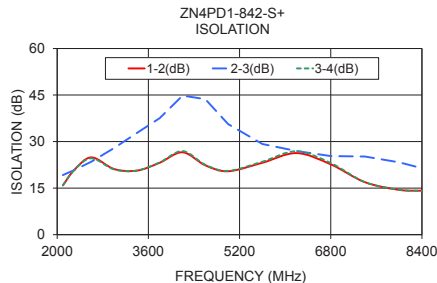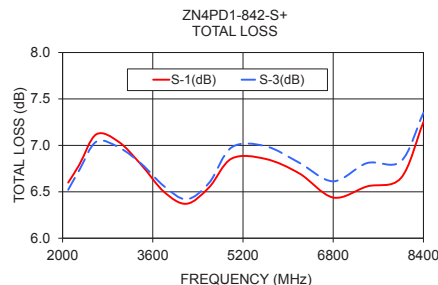

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M171494
ZN4PD1-842-S+
ED-150113
WP/CP/AM
190110