

# Suspended Substrate Stripline Filters and Multiplexers

50Ω

DC to 26 GHz

## The Big Deal

- Low insertion loss
- Ultra-wide passband width
- Fast roll-off with wide stopband
- Good power handling and temperature stability
- Passband up to 26 GHz
- Stopband up to 26.5 GHz can extend to 40 GHz



## Product Overview

Mini-Circuits' Suspended Substrate Stripline filters offer low insertion loss by implementing printed circuit board suspended between two parallel ground planes, providing high Q. Low insertion loss combined with wide stop-band makes them an excellent choice for wideband instruments and systems like ECM, ECCM, ELINT and ultra-broadband receivers.

Low pass, high pass, band pass, band stop, diplexer and multiplexer designs can be realized with this technology. Advanced filter design and construction can achieve stopband width greater than 6x the center frequency, and temperature stability will be better than other printed circuit realizations because the fields are mainly in the air rather than in a dielectric. The inside walls of the housing hold the circuit and prevent movement that could be caused by vibration or mechanical shock, making these designs excellent candidates for harsh operating environments.

Suspended substrate stripline filters can be realized in small form factors with high-quality, precise machining for applications where size is critical. Excellent repeatability across units is achieved through precise tuning and process control.

## Key Features

Feature	Advantages
Low insertion loss	Low signal loss results in better SNR in receiver front end and better power delivery to antenna in transmitters
Fast roll-off	Higher selectivity results in better adjacent channel rejection and dynamic range
Wide stopband	Wide, spur-free stop band results in better receiver sensitivity
High power handling	Well suited for transmitter applications
Excellent temperature stability	Ensures minimal variation in electrical performance across temperature

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Suspended substrate stripline Low Pass Filter

50 $\Omega$  DC to 8000 MHz

ZLSS-8G+



CASE STYLE: RA2456  
Connectors Model  
SMA-F ZLSS-8G-S+

## Features

- Low passband IL
- High rejection of 90 dB typ.
- Wider stopband
- Connectorized package and small size

## Applications

- Harmonic rejection
- Transmitters / Receivers
- Lab use

## Electrical Specifications at 25°C

Parameter		F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Insertion Loss	DC-F1	DC-8000	—	1.0	2.0	dB
	VSWR	DC-F1	DC-8000	—	2.1	—	:1
Stop Band	Insertion Loss	F2-F3	10800-12500	20	30	—	dB
		F3-F4	12500-14600	40	50	—	dB
		F4-F5	14600-18000	60	80	—	dB
		F5-F6	18000-22000	—	90	—	dB
		F6-F7	22000-26500	—	80	—	dB
	VSWR	F2-F7	10800-26500	—	20	—	:1

## Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	3W max.

Permanent damage may occur if any of these limits are exceeded.


## Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
10	0.00	1.00	10	0.24
100	0.01	1.03	100	0.24
1000	0.16	1.26	250	0.24
4000	0.26	1.07	500	0.24
6000	0.43	1.26	1000	0.24
8000	0.70	1.31	1500	0.24
8500	1.19	1.62	2000	0.24
8800	3.58	4.20	2500	0.25
9250	10.34	16.32	3000	0.25
9900	20.34	33.64	3500	0.25
10600	30.00	33.25	4000	0.26
10800	32.62	31.02	4250	0.26
11000	35.20	29.78	4500	0.26
12500	52.39	37.17	4750	0.26
14600	71.55	67.74	5000	0.27
15000	74.78	72.05	5500	0.27
18000	96.67	120.82	6500	0.30
22000	102.96	80.05	7000	0.31
24000	99.50	42.75	7500	0.33
26500	113.55	12.68	8000	0.38

## Functional Schematic







## Typical Frequency Response



## +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

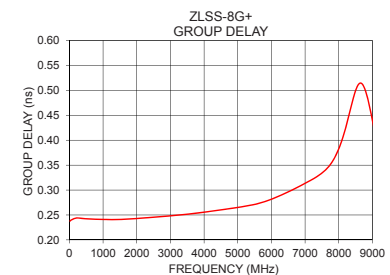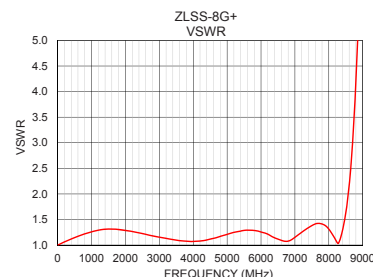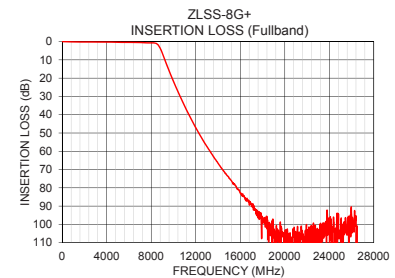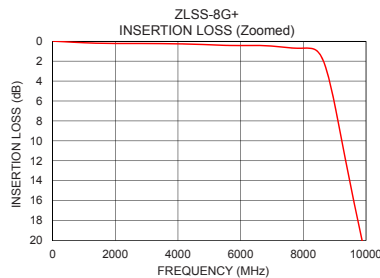

## Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)




[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 [sales@minicircuits.com](mailto:sales@minicircuits.com)

Coaxial Connections

PORT - 1	SMA FEMALE
PORT - 2	SMA FEMALE

Outline Drawing

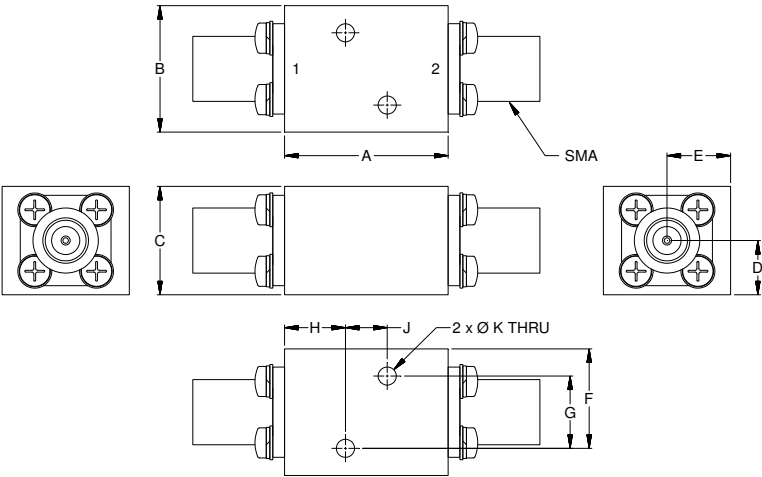

Outline Dimensions ( <sup>inch</sup><sub>mm</sub> )

A	B	C	D	E	F	G	H	J	K	Wt.
.90	.70	.60	.30	.35	.55	.400	.34	.230	.100	grams
22.86	17.78	15.24	7.62	8.89	13.97	10.16	8.51	5.84	2.54	55

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)