

Ceramic Balun RF Transformer

50Ω 1300 to 2300 MHz

TCN1-23+



CASE STYLE: FV1206-1

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Input RF Power**	5W
**From 85°C derate linearly to 2.5W at 100°C Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

PRIMARY DOT	4
PRIMARY (GND)	2,5
SECONDARY DOT	1
SECONDARY	6
NOT USED	3

Features

- wideband, 1300 to 2300 MHz
- miniature size, 0.12"x.06"x.037"
- LTCC construction
- low cost
- aqueous washable

Applications

- DECT
- PCS
- PHS
- PDS
- PDC

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel
at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500, 1000, 3000

Electrical Specifications (T_{AMB}=25°C)

Ω RATIO	FREQUENCY (MHz)	INSERTION* LOSS (dB)	PHASE UNBALANCE † (Deg.) Typ.	AMPLITUDE UNBALANCE (dB) Typ.
1	1300-2300	0.7	5.0	0.7
	1800-2000	0.6	4.0	0.5


* Insertion Loss is referenced to mid-band loss, 0.8 dB

† Relative to 180°

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
1300.00	0.91	15.33	0.89	1.52
1500.00	0.91	16.32	0.60	1.46
1600.00	0.91	17.14	0.50	1.81
1700.00	0.91	18.31	0.44	2.34
1800.00	0.92	19.68	0.41	3.09
1900.00	0.93	21.20	0.43	3.82
2000.00	0.95	22.85	0.50	4.57
2100.00	0.97	24.40	0.60	5.34
2200.00	1.00	25.70	0.75	6.05
2300.00	1.04	26.43	0.95	6.61


Outline Drawing

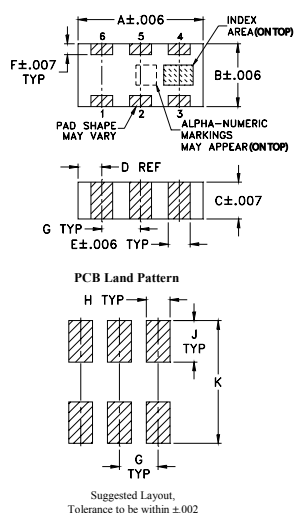

Outline Dimensions (Inch)

A	B	C	D	E	F
.126	.063	.035	.024	.022	.011
3.20	1.60	0.89	0.61	0.56	0.28
G	H	J	K	wt	
.039	.024	.042	.123	grams	
0.99	0.61	1.07	3.12	.020	

Demo Board MCL P/N: TB-287 Suggested PCB Layout (PL-163)



- NOTE:
1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
[Blue shaded area] DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
[Hatched area] DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK


Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp




www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com


INSERTION LOSS

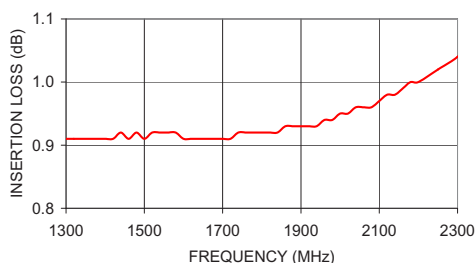


AMPLITUDE UNBALANCE

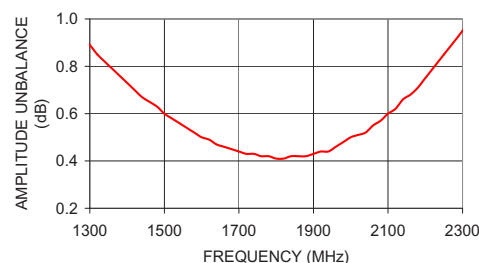

PHASE UNBALANCE

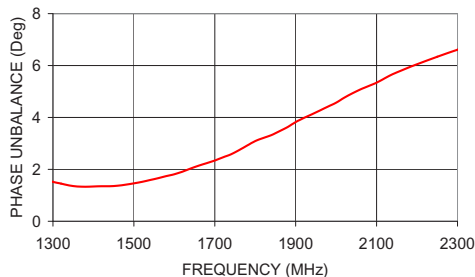

configuration G



REV. E
M158161
TCN1-23+
ED-11687/2
DJ/RS/CP/AM
160920