# **Wideband Double Balanced Mixer**

**MDB-44H+** 

Level 15 (LO Power 15dBm) 10-40 GHz

# **The Big Deal**

- High L-R Isolation, 37 dB typ
- Useable as Up & Down Converter
- Small Size 3 x 3 x 0.89 mm



### **Product Overview**

MDB-44H+ is an advanced wideband frequency mixer fabricated using InGaP HBT technology with integrated LO and RF Baluns. It has repeatable performance making it suitable for volume production. It is packaged in tiny 3 mm x 3 mm x 0.89 mm MCLP $^{\text{TM}}$  package.

# **Key Features**

Feature	Advantages	
Double Balanced	Results in excellent LO-RF (30-39 dB typical) & LO-IF (27-37 dB typical) Isolations minimizing need for external filtering	
Wide Bandwidth, 10 to 40 GHz	Useful in wideband systems or in in several narrowband systems. Reducing inventory	
Wide IF Bandwidth DC-15 GHz	Usable in first and second down converter applications. IF as low as DC enables use in phase detector applications.	
3 mm x 3 mm, 12 lead MCLP Package	Low Inductance, repeatable transitions, excellent thermal contact to PCB	

# **Wideband Double Balanced Mixer**

**MDB-44H+** 

### Level 15 (LO Power 15dBm) 10-40 GHz

#### **Product Features**

- Wide bandwidth 10 to 40 GHz
- High L-R Isolation, 37 dB typ. at 25 GHz
- Useable as Up & Down Converter
- Small Size, 3mm x 3mm x 0.89 mm
- Aqueous washable



#### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


#### **Typical Applications**


- Satellite up and down converters
- Defense radar & communication
- VSAT
- · Line of sight links
- Federal fixed service
- 5G
- ISM

#### **General Description**

MDB-44H+ is an advanced wideband frequency mixer fabricated using InGaP HBT technology with integrated LO and RF Baluns. It has repeatable performance making it suitable for volume production. It is packaged in tiny  $3 \text{mm} \times 3 \text{mm} \times 0.89 \text{mm} \text{ MCLP}^{TM}$  package.

#### simplified schematic and bonding pad description





Function	Pad Number	Description	
RF-IN	11	RF input	
LO-IN	5	LO input	
IF-OUT	2	IF output	
GND	1,3,4,6,10,12 Paddle	Connect to Ground	
NC	7-9	No connection, not used	



#### Electrical Specifications<sup>1</sup> at 25°C, unless noted

Parameter	Condition (GHz)	Min.	Тур.	Max.	Units
RF Frequency Range		10		40	GHz
LO Frequency Range		10		40	GHz
IF Frequency Range		DC		15	GHz
LO Power			+15		dBm
Conversion Loss (at IF=30 MHz)	10 - 20	_	8.0	_	dB
	20 - 30	_	8.4	11.0	
	30 - 40	_	8.9	13.4	
LO-RF Isolation	10 - 20	_	39	_	
	20 - 30	25	37	_	
	30 - 40	_	30	_	
LO-IF Isolation	10 - 20	_	33	_	dB
	20 - 30	20	37	_	
	30 - 40	_	27	_	
RF-IF Isolation	10 - 20		24		dB
	20 - 30		16		
	30 - 40		31		
Input at 1dB Compression	10 - 40		10		dBm
Input IP3	10 - 20		20		dBm
Noise Figure	20		8.6		dB
Thermal Resistance (junction-to-ground lead)			105		°C/W

<sup>1.</sup> Measured on Mini-Circuits Characterization test board TB-973-MDB44HC+. See Characterization Test Circuit Figure 1

## **Absolute Maximum Ratings<sup>2</sup>**

Parameter	Ratings		
Operating Temperature	-40°C to 85°C		
Storage Temperature	-65°C to 150°C		
RF Power	21 dBm		
LO Power	21 dBm		
IF Current	30 mA		

Permanent damage may occur if any of these limits are exceeded.
 Electrical maximum ratings are not intended for continuous normal operation.



#### **Characterization Test Circuit**

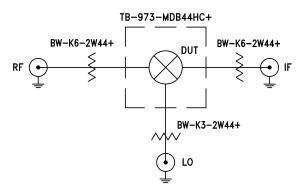


Figure 1A.
Block Diagram of Test Circuit used for characterization of Conversion
Loss, Isolations (LO-RF, LO-IF, RF-IF) and Return Loss (LO, RF, IF)

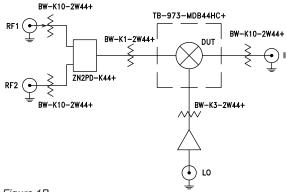


Figure 1B.

Block Diagram of Test Circuit used for characterization of Input IP3

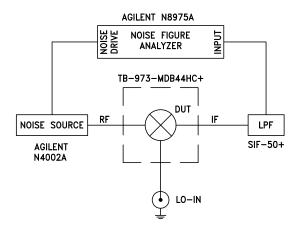



Figure 1C.
Block Diagram of Test Circuit used for characterization of Noise Figure

Figure 1. Block Diagram of Test Circuit used for characterization. (DUT soldered on Mini-Circuits Characterization test board TB-973-MDB44HC+). Conversion Loss, Isolations L-R, L-I & R-I, Input IP3 are measured using Agilent PSA E4448A spectrum Analyzer and PSG E8257D Signal Generators. NF is measured using Agilent's N8975A NF Analyzer

Conditions (Down Converter):

- 1. Conversion Loss, Isolations (L-R, L-I & R-I): RF= 0 dBm, LO=+15 dBm, IF=30 MHz
- 2. Output IP3 (OIP3): Two tones, spaced 1 MHz apart, 0 dBm/tone at output.
- 3. Noise Figure: LO=+15 dBm

### **Application Circuit**



## **Product Marking**



Additional Detailed Technical Information additional information is available on our dash board. To access this information click here			
	Data Table		
Performance Data	Swept Graphs		
	S-Parameter (S1P Files) Data Set (.zip file)		
Case Style	DQ1225 Plastic package, exposed paddle, lead finish: Matte-Tin		
Tape & Reel	F66		
Standard quantities available on reel	7" reels with 20, 50, 100, 200, 500, 1K and 2K devices		
Suggested Layout for PCB Design	PL-540		
Evaluation Board	TB-973-MDB44HC+		
Environmental Ratings	ENV08T1		


### **ESD Rating**

Human Body Model (HBM): Class 1A (250 to <500V) in accordance with ANSI/ESD STM 5.1 - 2001

#### **MSL Rating**

Moisture Sensitivity: MSL1 in accordance with IPC/JEDEC J-STD-020D

#### **MSL Test Flow Chart**

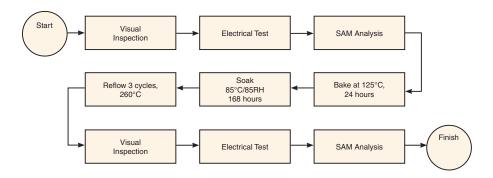

#### **Additional Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

