



RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

RVPT0117MBC

Voltage Control Phase Shifter 70-100MHz



Features

- Wide Band Operation 70-100MHz
- 360° Phase Shift
- Low Insertion Loss and Low Phase Error
- Single Control Operation
- Customization available upon request

Electrical Specifications, TA = +25°C

Description	PN:RVPT0117MBC			
	Voltage Control Phase Shifter			
Parameters	Min	Typ	Max	Units
Frequency Range	70~100			MHz
Phase Range		360		deg
Phase Error		±20		deg
Insertion Loss		4.0	5.0	dB
Insertion Loss Temperature Coefficient		0.01		dB/°C
Input VSWR		1.5	2.0	:1
Output VSWR		1.5	2.0	:1
0.1dB Compression Point (Po.1dB)		30		dBm
Control Voltage	0	10		V
current	5			mA
Impedance	50			Ω
Weight	2.12			ounces
Input / Output Connectors	SMA-Female			
Finish	Nickel Plated			
Material	Aluminum			
Sealing	Hermetically Sealed (Optional)			

Voltage Control Phase Shifter 70-100MHz



RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

RVPT0117MBC

Absolute Maximum Ratings

Control Voltage	0~15V
RF Input power	+30dBm

Ordering Information


Part No	ECCN	Description
RVPT0117MBC	EAR99	70-100MHz Voltage Control Phase Shifter

Environmental Specifications


Operational Temperature (°C)	-45 ~ +85
Storage Temperature (°C)	-50 ~ +125
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35c, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions

Typical Performance Plots


Insertion Loss @ +25°C

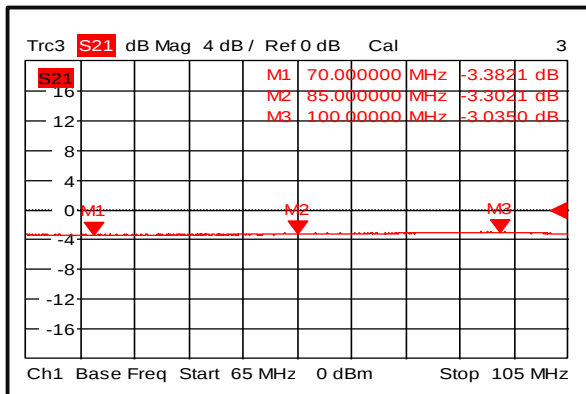


Input VSWR @ +25°C

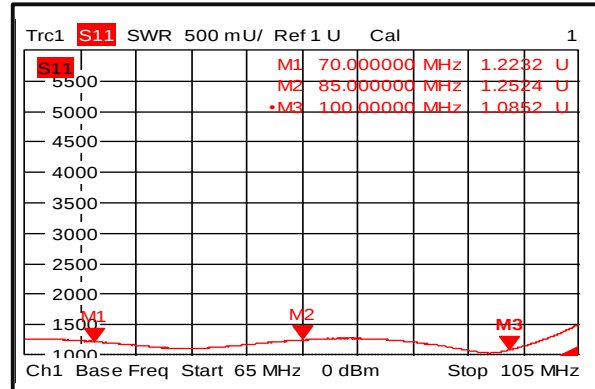

Output VSWR @ +25°C

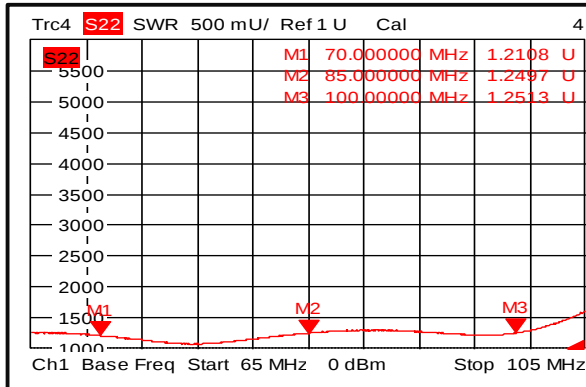

Insertion Loss @ -45°C

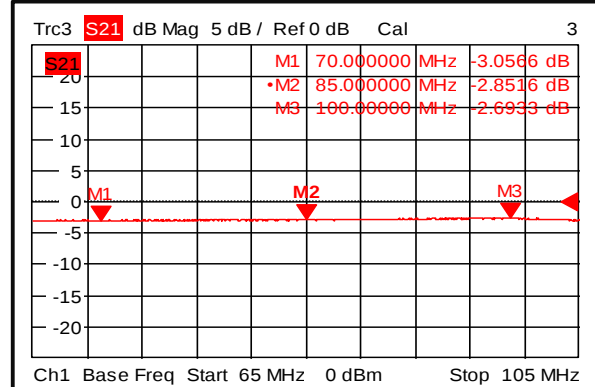

Voltage Control Phase Shifter 70-100MHz




RF-LAMBDA


LEADER OF RF BROADBAND SOLUTIONS

RVPT0117MBC


Input VSWR @ -45°C

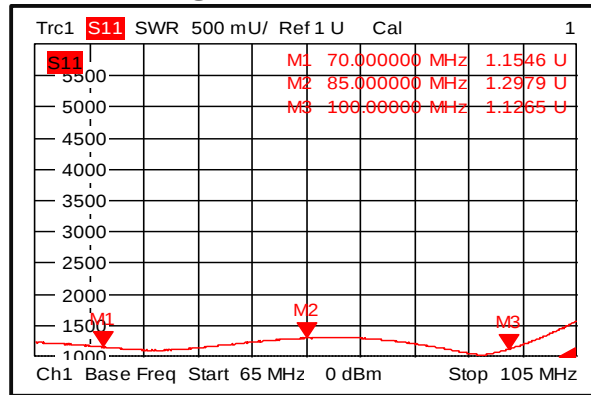


Output VSWR @ -45°C

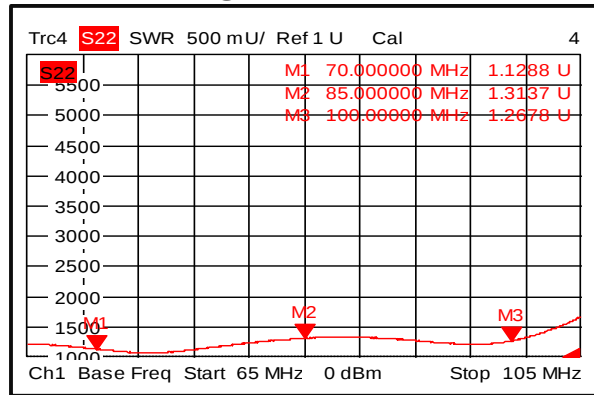


Insertion Loss @ +85°C

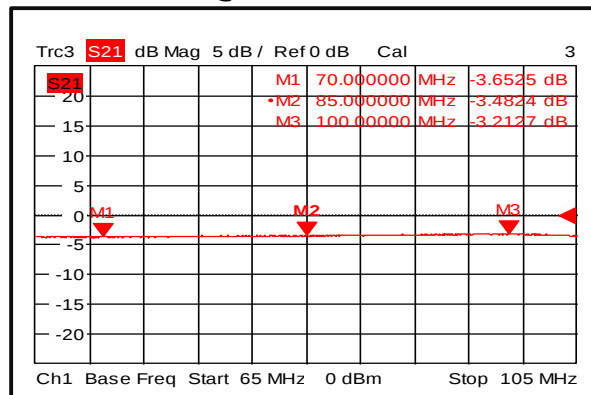


Input VSWR @ +85°C

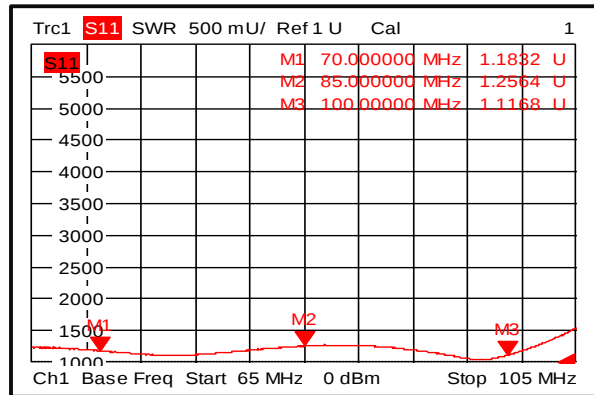

Output VSWR @ +85°C

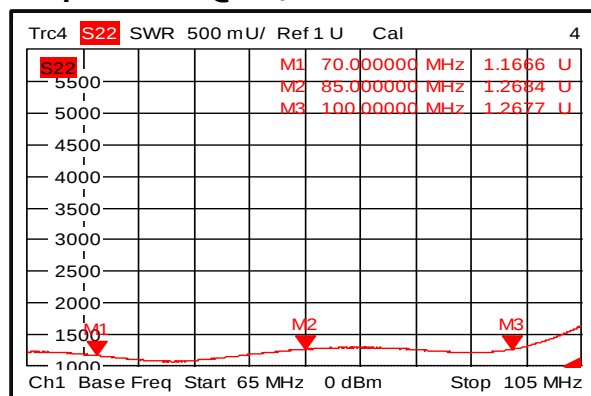

Insertion Loss vs. Frequency

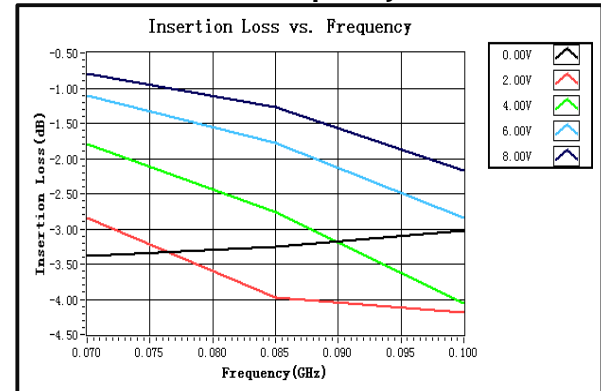

Voltage Control Phase Shifter 70-100MHz




RF-LAMBDA


LEADER OF RF BROADBAND SOLUTIONS

RVPT0117MBC


Input VSWR vs. Voltage

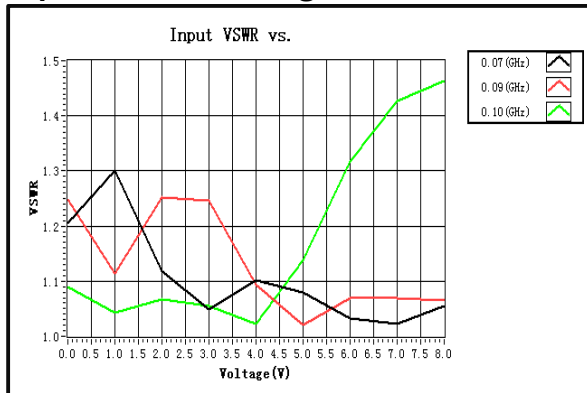


Output VSWR vs. Voltage

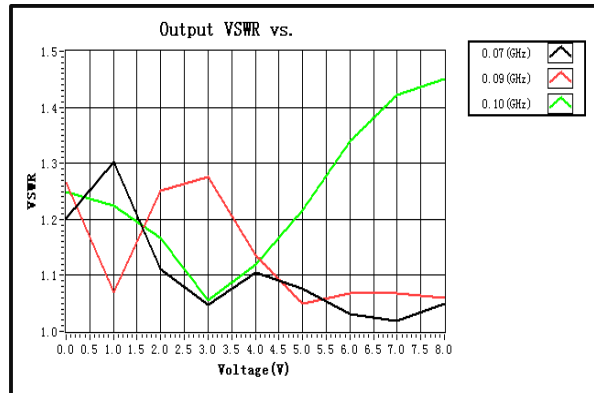


Phase Shift vs. Frequency

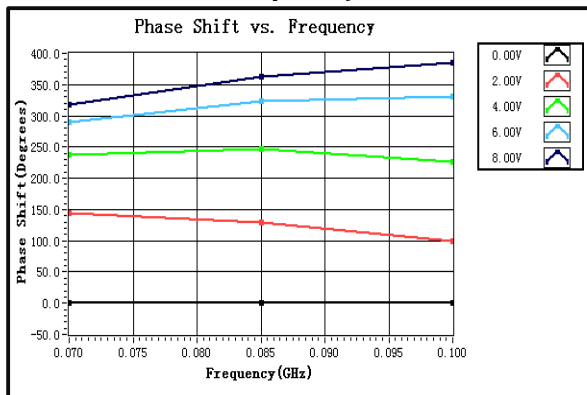

Phase Shift vs. Voltage

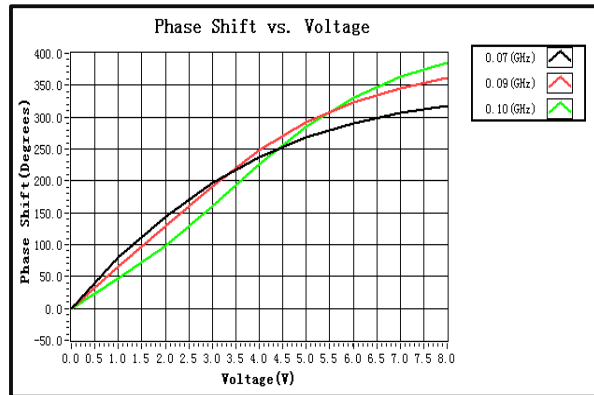

Attenuation vs. Frequency

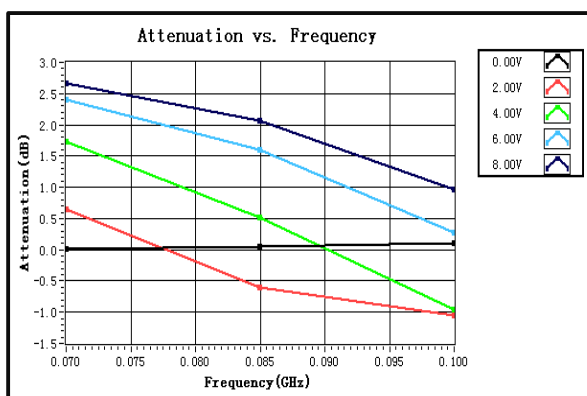

Voltage Control Phase Shifter 70-100MHz




RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

RVPT0117MBC

Outline Drawing:

All Dimensions in mm [inches]

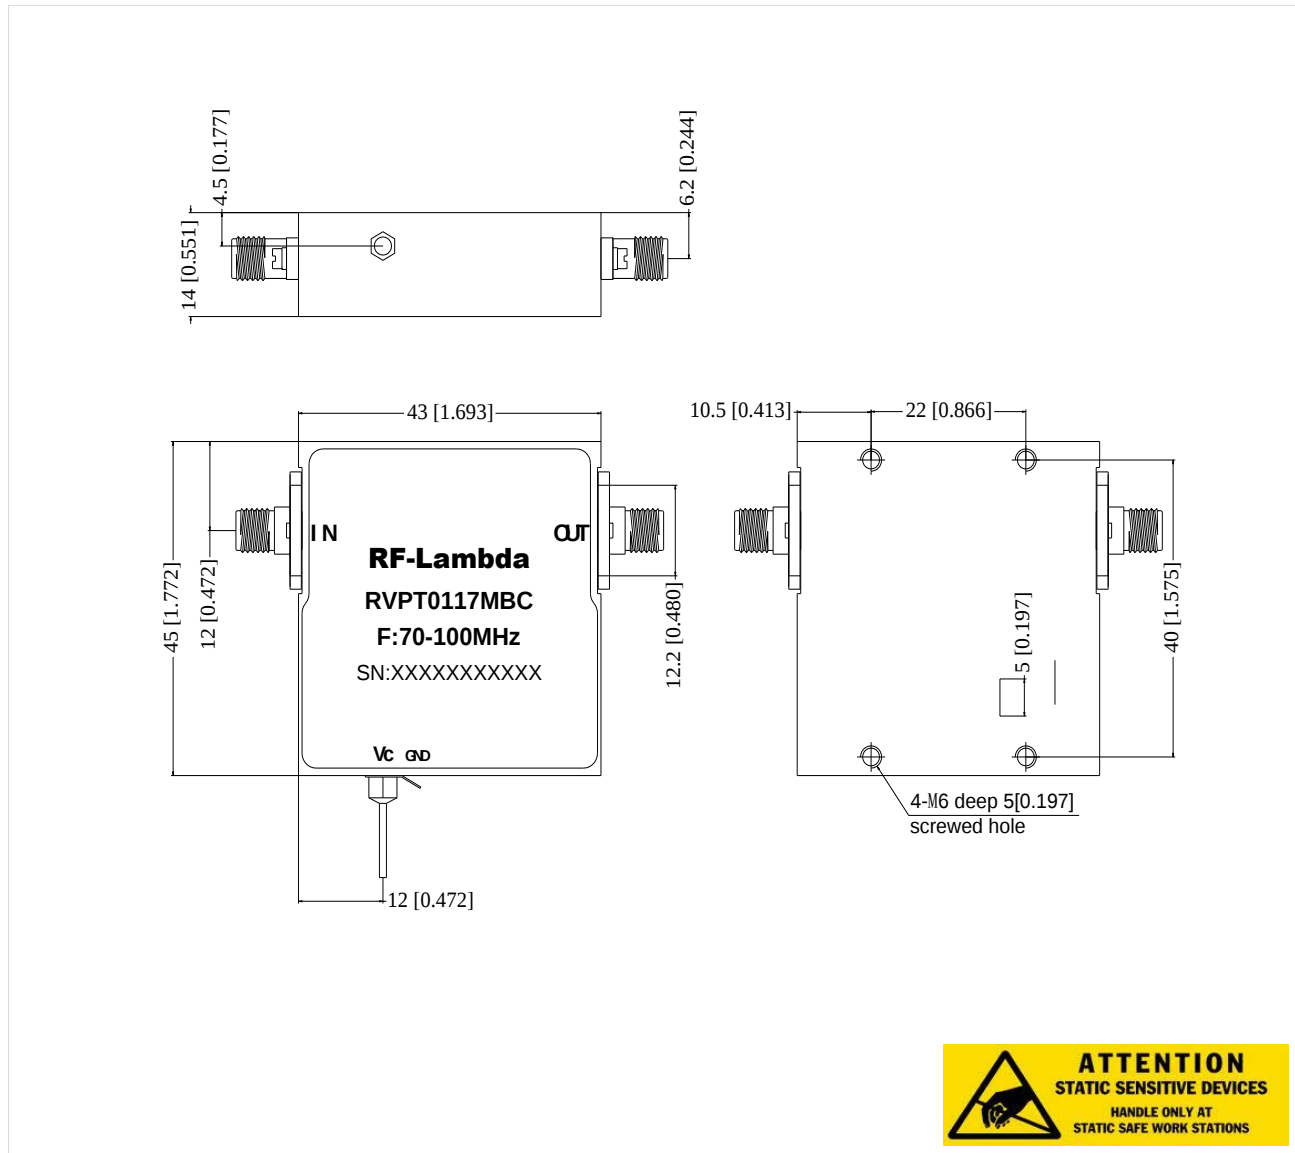

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Voltage Control Phase Shifter 70-100MHz