



RF-LAMBDA

The power beyond expectations

Phase Shifter

0.01-30GHz

Analog Voltage Control Phase Shifter



- frequency band up to 31GHz
- 180~360 degree phase shift range
- Low insertion loss variation
- 0–15 V control voltage range
- Low IM3 and High IP3 Performance
- Available in SMD and Coaxial Package
- Lead (Pb)-free and RoHS-compliant
- Temperature Range -55°C~+85°C
- Customization available upon request

360° Voltage Controllable Phase Shifter (Coaxial)								
Part Number	Degree	Low Freq. (GHz)	High Freq. (GHz)	Bandwidth	Insertion Loss (dB)	VSWR (max.)	Voltage (V)	Power (Watts)
RVPT0117MBC	360°	0.01	0.17	30%	4.00	2.00	DC-20	0.1
RVPT1725MBC	360°	0.17	0.25	FULL Band	4.00	2.00	DC-20	0.1
RVPT0205MBC	360°	0.25	0.5	FULL Band	4.00	2.00	DC-20	0.1
RVPT0501GBC	360°	0.5	1	FULL Band	4.00	2.00	DC-20	0.1
RVPT0102GBC	360°	1	2	FULL Band	4.00	2.00	DC-20	0.1
RVPT0204GBC	360°	2	4	FULL Band	5.00	2.50	DC-13	0.1
RVPT0408GBC	360°	4	8	FULL Band	8.00	2.00	DC-13	0.1
RVPT0818GBC	360°	8	18	FULL Band	8.00	2.50	DC-13	0.1
RVPT1822GBC	360°	18	22	10%	10.00	2.50	DC-15	0.1
RVPT2231GBC	360°	22	31	10%	14.00	2.50	DC-15	0.1
180° Voltage Controllable Phase Shifter (Coaxial)								
Part Number	Degree	Low Freq. (GHz)	High Freq. (GHz)	Bandwidth	Insertion Loss (dB)	VSWR (max.)	Voltage (V)	Power (Watts)
RVPT0117MAC	180°	0.01	0.17	30%	1.50	1.60	DC-20	0.1
RVPT1725MAC	180°	0.17	0.25	FULL Band	3.00	2.00	DC-20	0.1
RVPT0205MAC	180°	0.25	0.5	FULL Band	3.00	2.00	DC-20	0.1
RVPT0501GAC	180°	0.5	1	FULL Band	3.00	2.00	DC-20	0.1
RVPT0102GAC	180°	1	2	FULL Band	3.00	2.00	DC-20	0.1
RVPT0204GAC	180°	2	4	FULL Band	3.50	2.50	DC-10	0.1
RVPT0408GAC	180°	4	8	FULL Band	4.50	2.50	DC-10	0.1
RVPT0818GAC	180°	8	18	FULL Band	8.00	2.50	DC-10	0.1
RVPT1218GAC	180°	12	18	FULL Band	6.00	2.50	DC-10	0.1
RVPT0220GAC	180°	2	20	FULL Band	7.00	2.50	DC-13	0.1
Surface Mount Voltage Controllable Phase Shifter								
Part Number	Degree	Low Freq. (GHz)	High Freq. (GHz)	Bandwidth	Insertion Loss (dB)	VSWR (max.)	Voltage (V)	Power (Watts)
RVPT0003MAS	180°	0.01	0.30	10%	1.50	1.60	0-15	0.2
RVPT0302GAS	180°	0.30	2.00	10%	2.00	2.00	0-15	0.2
RVPT0003MBS	360°	0.01	0.30	10%	3.00	1.60	0-15	0.2
RVPT0302GBS	360°	0.30	2.00	10%	4.00	2.00	0-15	0.2

Analog Voltage Control Phase Shifter 180° / 360°





RF-LAMBDA


The power beyond expectations

Phase Shifter


0.01-30GHz

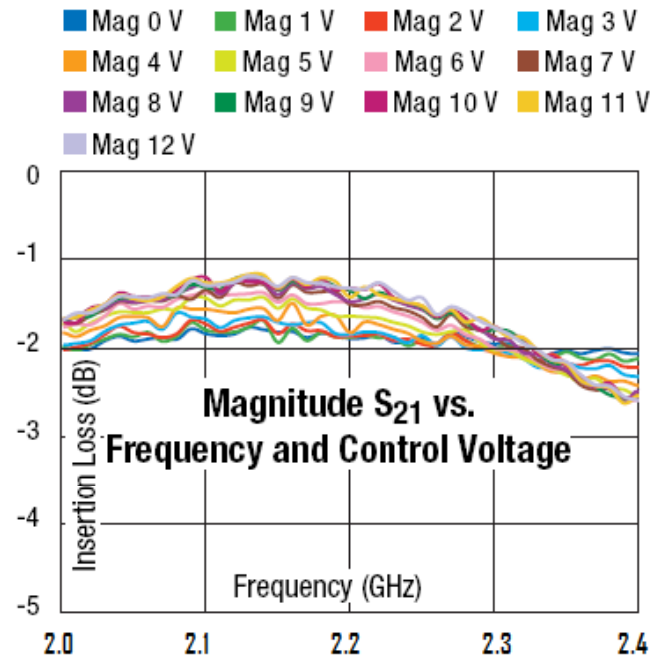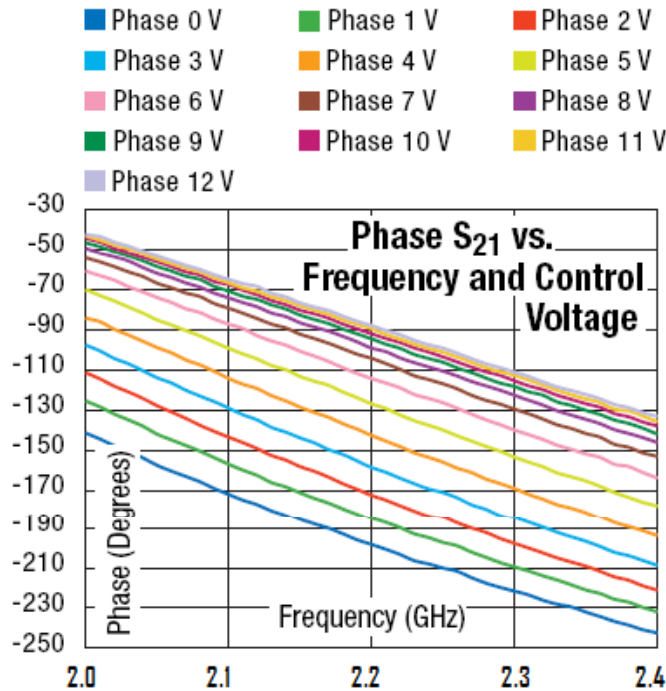

CAUTION: Although this device is designed to be as robust as possible, ESD (Electrostatic Discharge) can damage this device. This device must be protected at all times from ESD. Static charges may easily produce potentials of several kilovolts on the human body or equipment, which can discharge without detection. Industry-standard ESD precautions must be employed at all times.

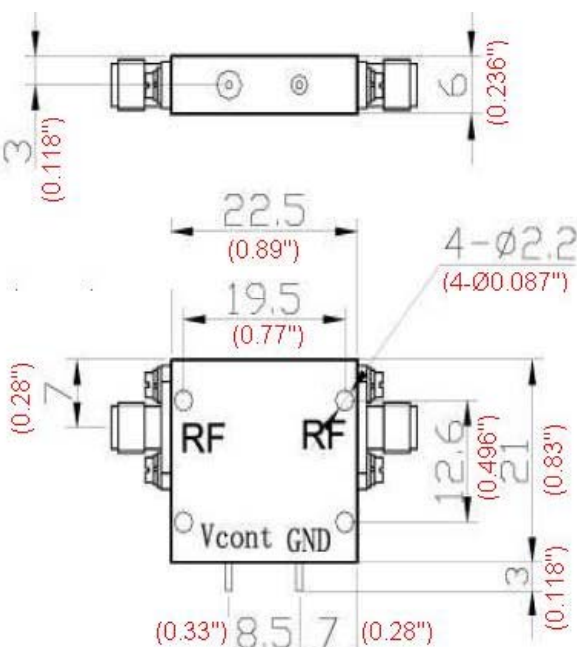

180° Phase Shifter

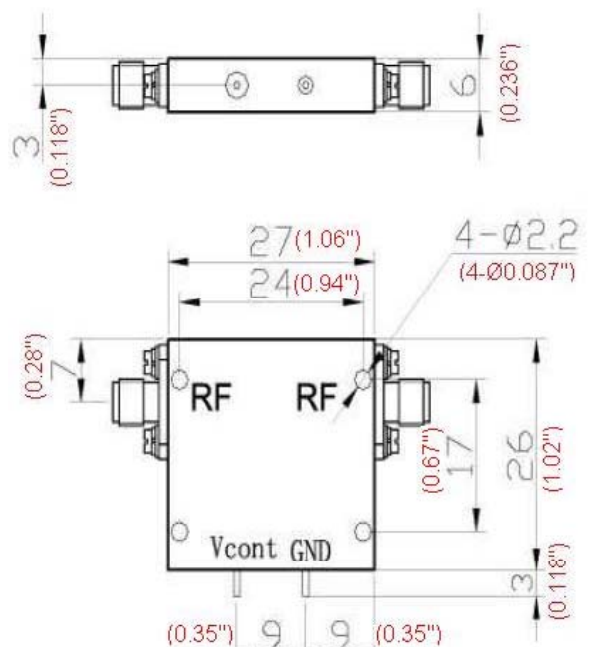

360° Phase Shifter

Analog Voltage Control Phase Shifter 180° / 360°




RF-LAMBDA

The power beyond expectations



Phase Shifter

0.01-30GHz

Analog Voltage Control Phase Shifter 180° / 360°

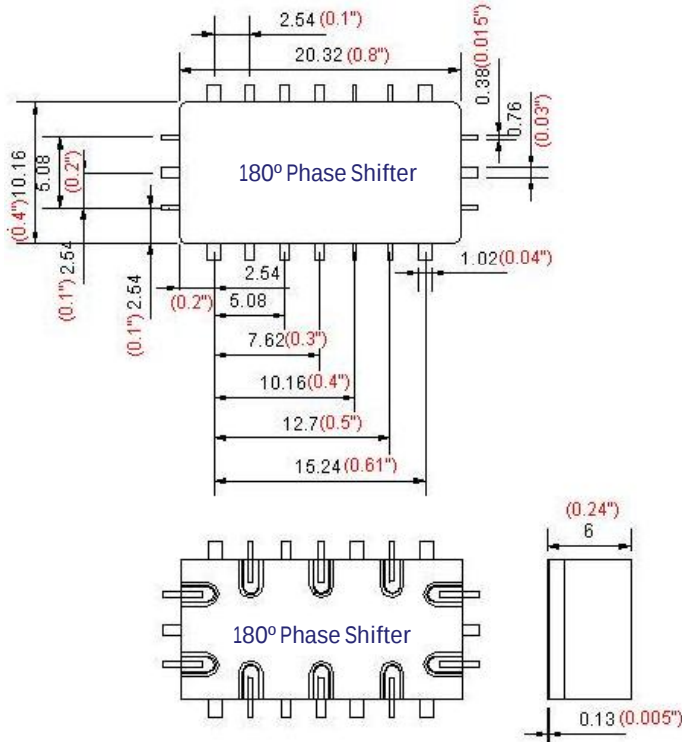

Terminal No.	Terminal Name
A ₁ (Pin 1)	IN/OUT
A ₂	GND
A ₃	IN/OUT
B ₁	GND
B ₃	GND
C ₁	V _{CONTROL}
C ₂	GND
C ₃	V _{CONTROL}

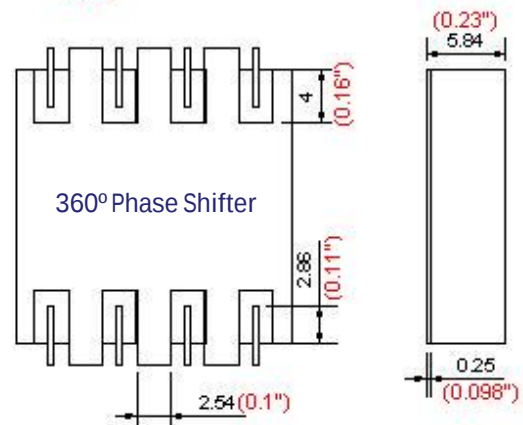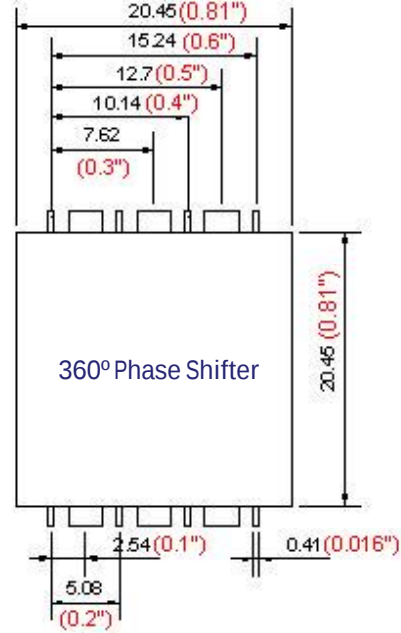

Copyright © 2002, 2003, 2004, 2005, 2006, RF-Lambda, Inc. All Rights Reserved.

Information in this document is provided in connection with RF-Lambda, Inc. ("RF-Lambda") products or services. These materials, including the information contained herein, are provided by RF-Lambda as a service to its customers and may be used for informational purposes only by the customer. RF-Lambda assumes no responsibility for errors or omissions in these materials or the information contained herein. RF-Lambda may change its documentation, products, services, specifications or product descriptions at any time, without notice. RF-Lambda makes no commitment to update the materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

No license, whether express, implied, by estoppel or otherwise, is granted to any intellectual property rights by this document. RF-Lambda assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of RF-Lambda products, information or materials, except as may be provided in RF-Lambda Terms and Conditions of Sale.

THE MATERIALS, PRODUCTS AND INFORMATION ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. RF-LAMBDA DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. RF-LAMBDA SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION,

LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

RF-Lambda products are not intended for use in medical, lifesaving or life-sustaining applications, or other equipment in which the failure of the RF-Lambda products could lead to personal injury, death, physical or environmental damage. RF-Lambda customers using or selling RF-Lambda products for use in such applications do so at their own risk and agree to fully indemnify RF-Lambda for any damages resulting from such improper use or sale.

Customers are responsible for their products and applications using RF-Lambda products, which may deviate from published specifications as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. RF-Lambda assumes no liability for applications assistance, customer product design, or damage to any equipment resulting from the use of RF-Lambda products outside of stated published specifications or parameters.

RF-Lambda, the RF-Lambda symbol, and "Breakthrough Simplicity" are trademarks or registered trademarks of RF-Lambda, Inc., in the United States and other countries. Third-party brands and names are for identification purposes only, and are the property of their respective owners. Additional information, including relevant terms and conditions, posted at www.RF-Lambda.com, are incorporated by reference.