



RF-LAMBDA

The power beyond expectations

RKT2G2A01

ROTARY KNOB MANUAL CONTROL STEP ATTENUATOR (DC-2GHZ 1DB RANGE)

Product description

Very small package and broadband performance
Continuous variable attenuation during operation
Excellent Repeatability and Long Life Switch
Low Deviation from Nominal Value
50 Ω impedance standard upon request
2W CW average power upon request
Custom Configurations Available Upon Request.




Applications:

Include Communication, 3G, Digital Transmission, Radar, Military, Broadcast & Television, science & Research department etc.

Part Number	Frequency	Power (Watts)	Attenuation Range (dB)	Attenuation Step (dB)	VSWR max.	Insertion Loss (dB)	Accuracy (dB)
RKT2G2A01	DC-2GHz	2	1	0.1	1.25	<0.50	± 0.3

Connector: SMA type, weight: 250g

Temperature (Operational): -10° C~+50° C (Storage) -40° C~+70° C

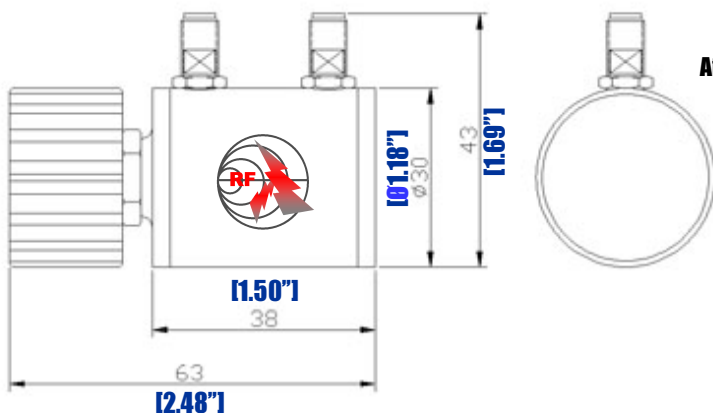

PN: **RKT 2 G X A 01**

Manual Control Attenuator Power Handle In Watt Freq Unit GHz Freq Number Product Type Attenuation Range

MANUAL CONTROL ROTARY ATTENUATOR (DC-2GHZ 1DB RANGE)




RF-LAMBDA

The power beyond expectations

RKT2G2A01

MANUAL CONTROL ROTARY ATTENUATOR (DC-2GHz 10dB RANGE)

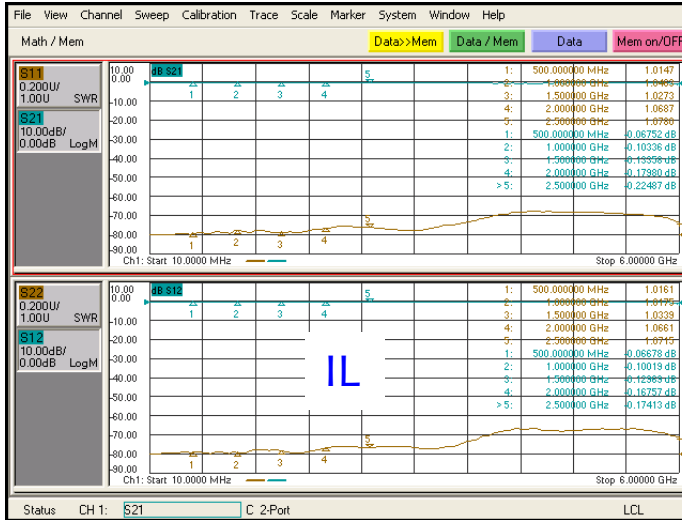



RF-LAMBDA

The power beyond expectations

RKT2G2A01

MANUAL CONTROL ROTARY ATTENUATOR (DC-26GHz 10dB RANGE)

