



RF-LAMBDA

The power beyond expectations

MANUAL CONTROL STEP ATTENUATOR (DC-4.3GHz 90DB RANGE)

Product description

- Very small package and broadband performance
- Continuous variable attenuation during operation
- Excellent Repeatability and Long Life Switch
- Low Deviation from Nominal Value
- 50Ω impedance standard upon request
- 2W CW average power
- Custom Configurations Available Upon Request.




Applications:

Include Communication, 3G, Digital Transmission, Radar, Military, Broadcast & Television, science & Research department etc.

Part Number	Frequency	Power (Watts)	Attenuation Range (dB)	Attenuation Step (dB)	VSWR max.	Insertion Loss (dB)	Accuracy (dB)
RKT2G4A90	DC-4.3GHz	2	90	1.0	1.50	≤1.25	±0.5dB(≤10dB) ±1dB(≤50dB) ±4%(>50dB)

Connector: N type, weight: 1250g

Temperature (Operational): -10° C~+50° C (Storage) -40° C~+70° C





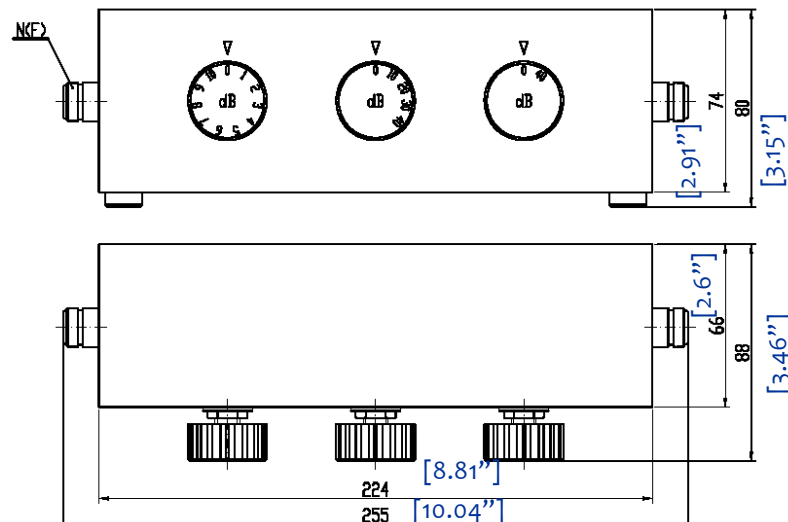


MANUAL CONTROL STEP ATTENUATOR (DC-4.3GHz 90DB RANGE)



RF-LAMBDA

The power beyond expectations

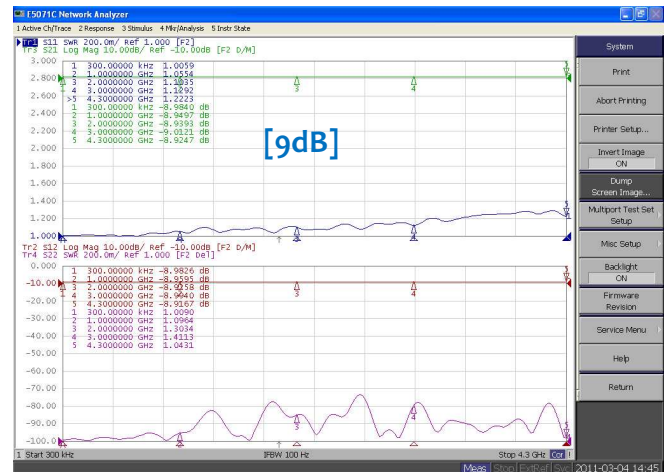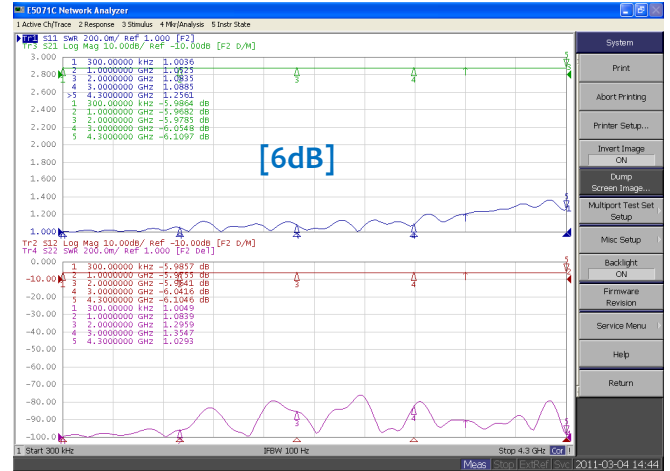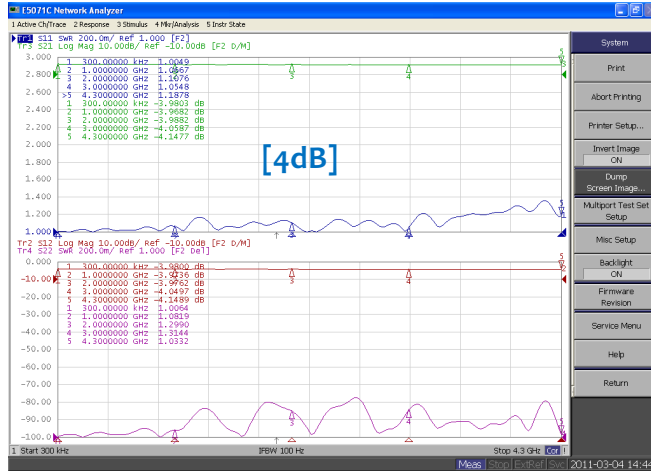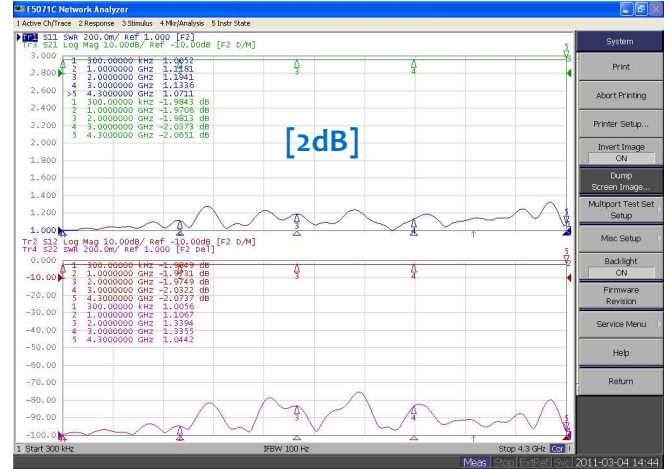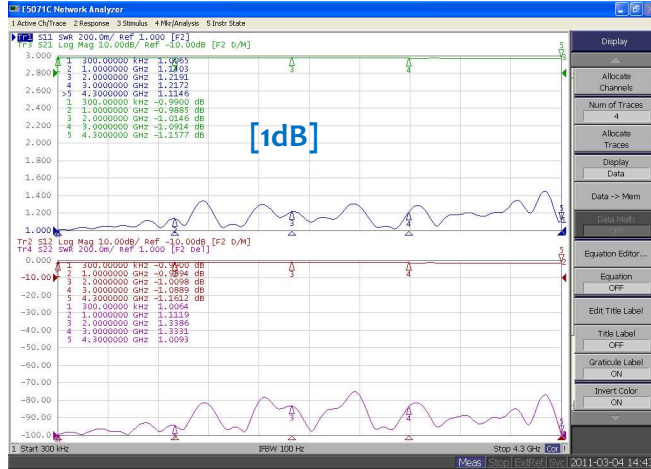

MANUAL CONTROL STEP ATTENUATOR IDC-4.3GHz 90dB RANGE

