




RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

RFDDC5M06G40

Coaxial 250W 40dB Dual Directional Coupler 0.5 - 6GHz

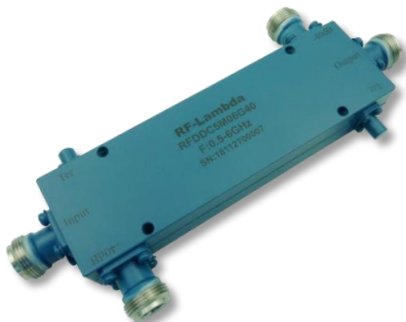

Features

- High power handling capability up to 250W
- Wide band operation
- High isolation within operational band
- Low Insertion loss
- High peak to average handling capability

Typical Applications

- Stable performance over temperature
- Aerospace and military applications
- LMDS multi-carrier operation

Electrical Specifications, $T_A=25\text{ }^{\circ}\text{C}$

Parameter		Min.	Typ.	Max.	Units
Frequency Range		0.5		6	GHz
Nominal Coupling		39	40	41.5	dB
Frequency Sensitivity			± 0.7	± 1.0	dB
Directivity		10	15		dB
Insertion Loss (Excl. Coupling)				0.5	dB
Insertion Loss (True)			0.25	0.5	dB
VSWR Primary			1.2	1.25	: 1
VSWR Secondary			1.2	1.25	: 1
Power Rating	Average	250			W
	Peak	5			KW
Impedance		50			Ohms
Weight		12.35			Ounces
Input / Output Connectors		N-Female			
Material		Aluminum			
Finish		Blue Paint			

Coaxial 250W 40dB Dual Directional Coupler 0.5 - 6GHz



Environmental Specifications and Test Standards

Parameter	Standard	Description
Operational Temperature	MIL-STD-39016	-45°C~+85°C
Storage Temperature		-55°C~+125°C
Thermal Shock		1 Hour@ -45°C → 1 Hour @ +85°C (5 Cycles)
Random Vibration		Acceleration Spectral Density 6 (m/s) Total 92.6 RMS
Electrical & Temperature Burn In		Temperature +85°C for 72 Hours
Shock		1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	MIL-STD-883	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)		MIL-STD-883 (For Hermetically Sealed Units)

Coaxial 250W 40dB Dual Directional Coupler 0.5 - 6GHz




RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS


RFDDC5M06G40

Typical Performance Plots


Nominal Coupling 1

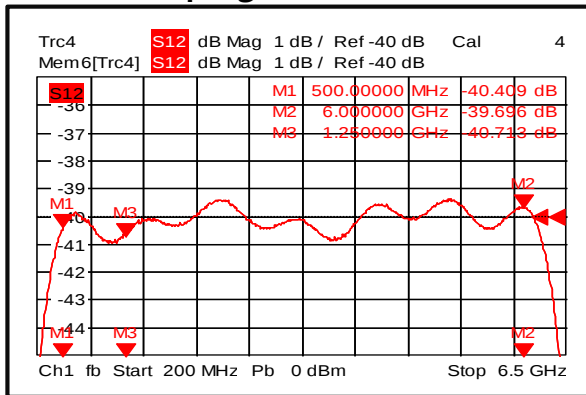


Nominal Coupling 2

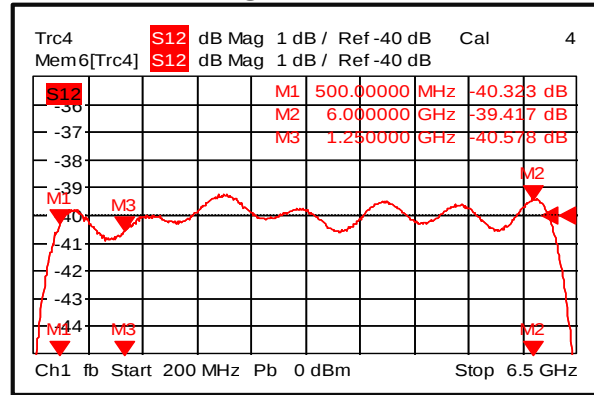


Primary VSWR 1

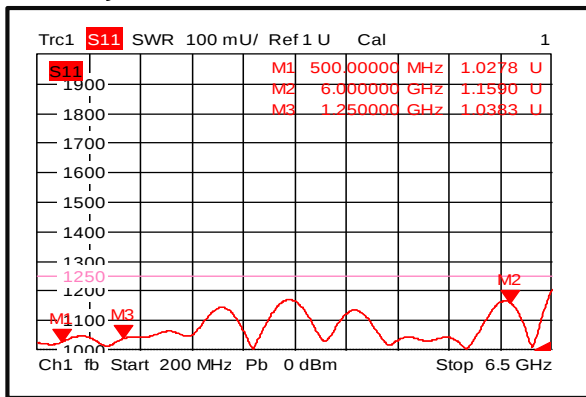


Primary VSWR 2

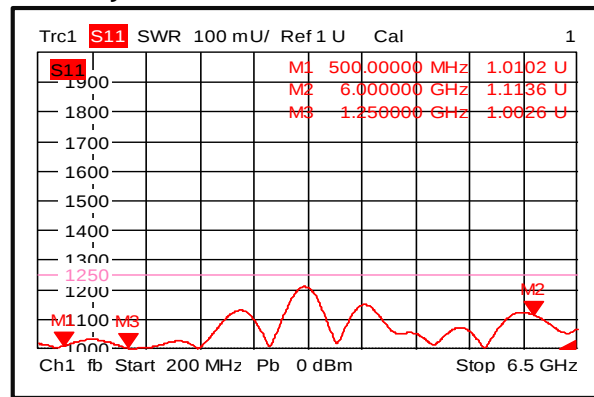


Secondary VSWR 1

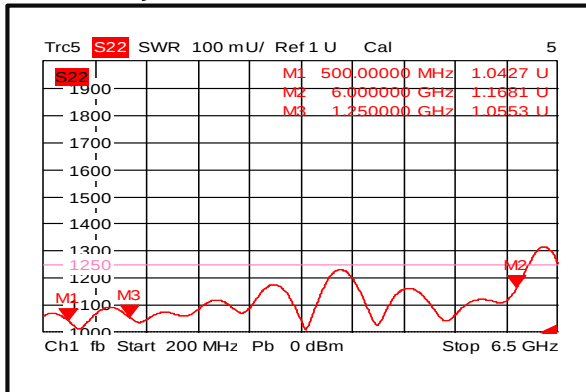


Secondary VSWR 2

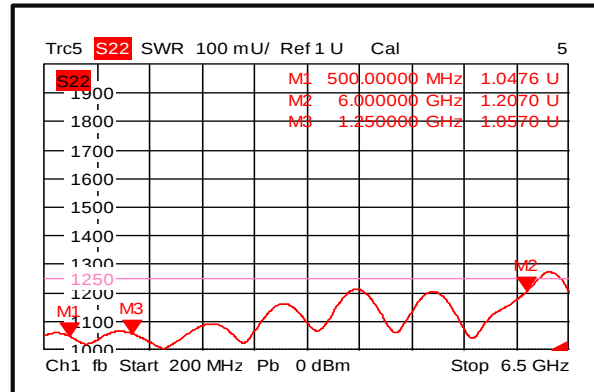

Directivity 1

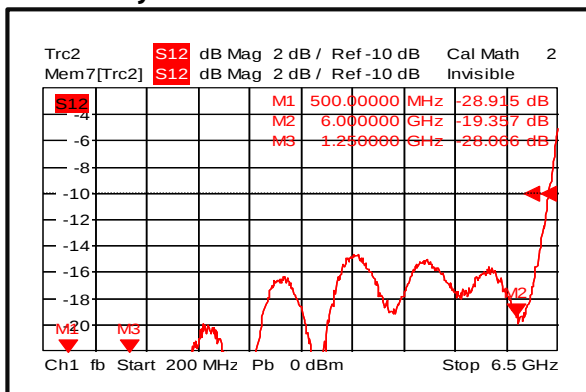

Directivity 2

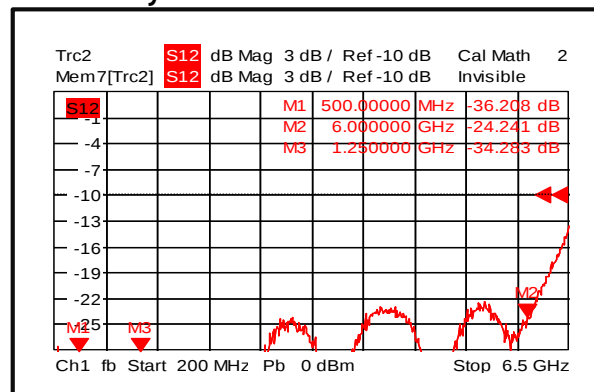

Coaxial 250W 40dB Dual Directional Coupler 0.5 - 6GHz




RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

RFDDC5M06G40


Insertion Loss

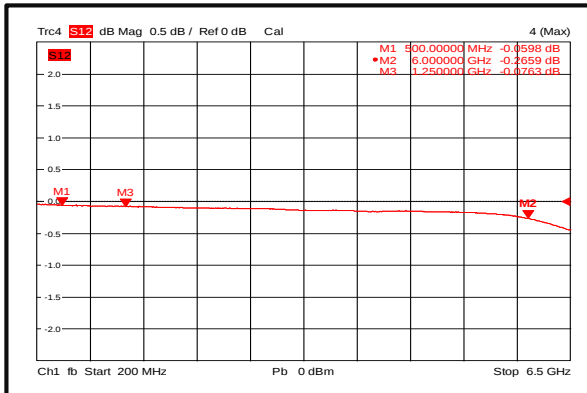

Outline Drawing:

All Dimensions in mm [inches]

Tolerance ± 0.25 [0.01]

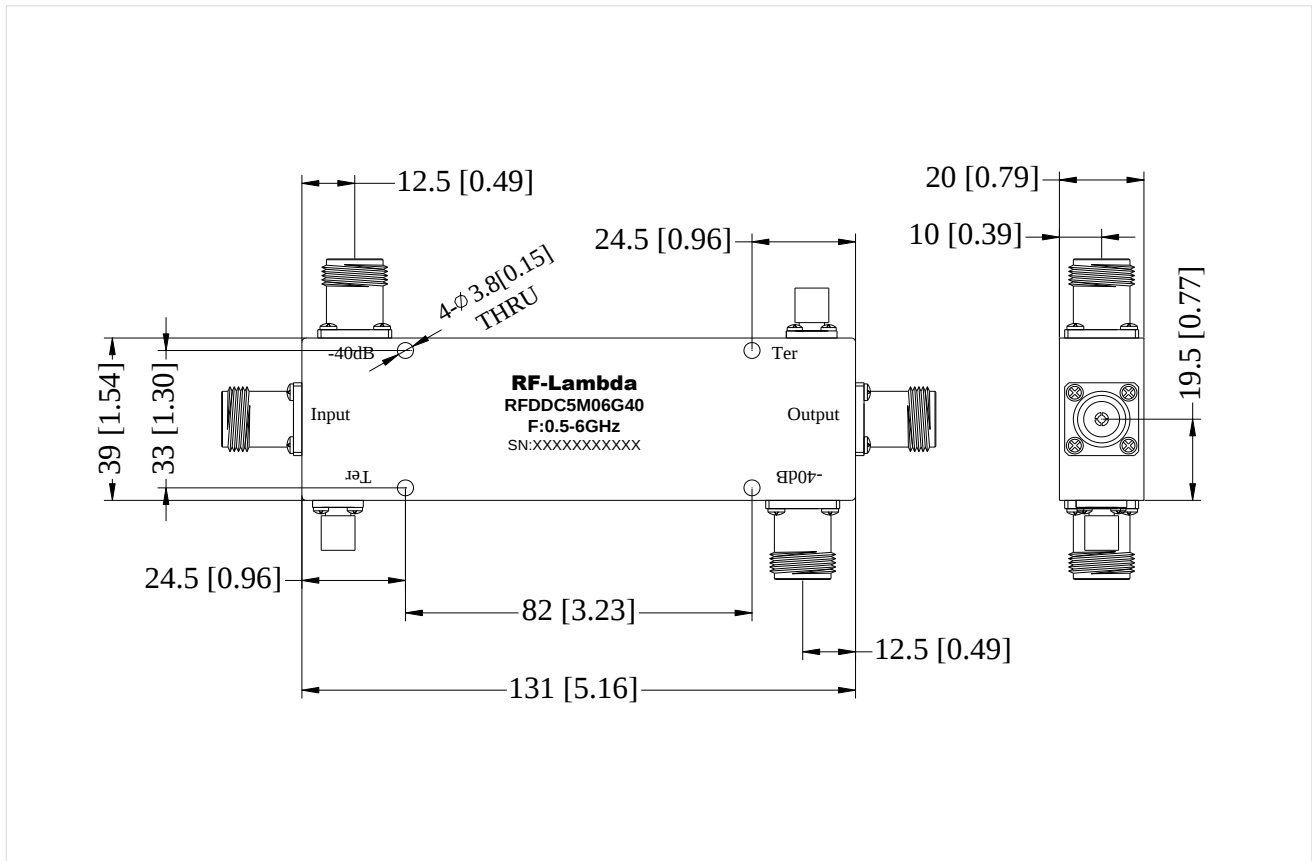

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Coaxial 250W 40dB Dual Directional Coupler 0.5 - 6GHz