




RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

RFHB03M07MVT

Coaxial 50W 90° Hybrid Coupler 350 - 700MHz

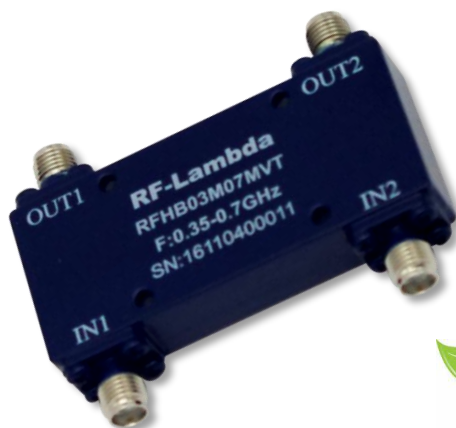

Features

- High power handling up to 50W
- Wide band operation
- High isolation within operational band
- Low Insertion Loss
- Stable performance over temperature
- Aerospace and military applications
- LMDS multi-carrier operation
- High peak to average handling capability
- All specifications can be modified upon request

Electrical Specifications, $T_A=25^\circ\text{C}$

Parameters		Min.	Typ.	Max.	Units
Frequency Range		350		700	MHz
Nominal Coupling			3		dB
Insertion Loss			0.15	0.3	dB
Isolation		20	25		dB
Amplitude Imbalance			± 0.3	± 0.5	dB
Phase Imbalance			± 1	± 2	deg
VSWR			1.1	1.2	:1
Power Rating	Average	50			W
	Peak	200			W
Impedance		50			Ohms
Weight		1.76			ounces
Input / Output Connectors		SMA-Female			
Material		Aluminum			
Finishing		Blue paint			

Environmental Specifications

Operational Temperature ($^\circ\text{C}$)	-45 to +85
Storage Temperature ($^\circ\text{C}$)	-55 to +125
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35 $^\circ\text{C}$, 95%RH at 40 $^\circ\text{C}$
Shock	20G for 11msec half sine wave, 3 axis both directions

Coaxial 50 W 90° Hybrid Coupler 350 - 700MHz




RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS


RFHB03M07MVT

Typical Performance Plots


Loss & Amplitude Imbalance

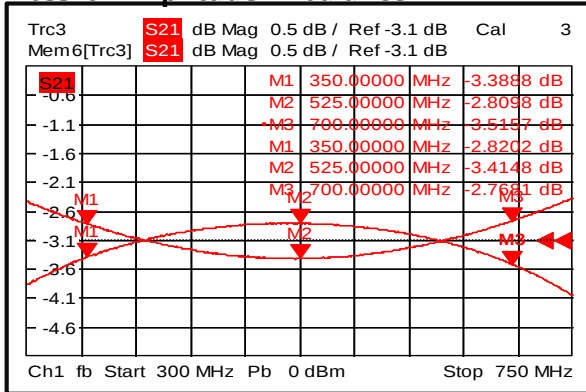


Input VSWR

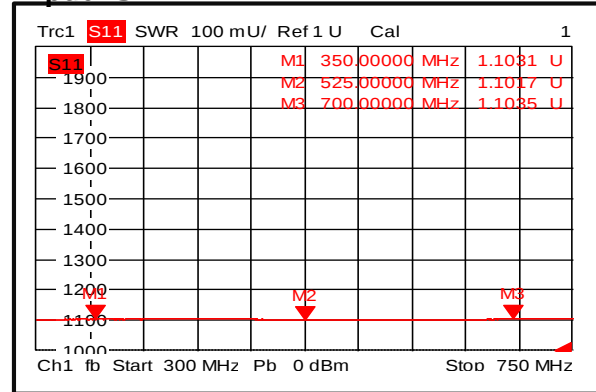


Output VSWR

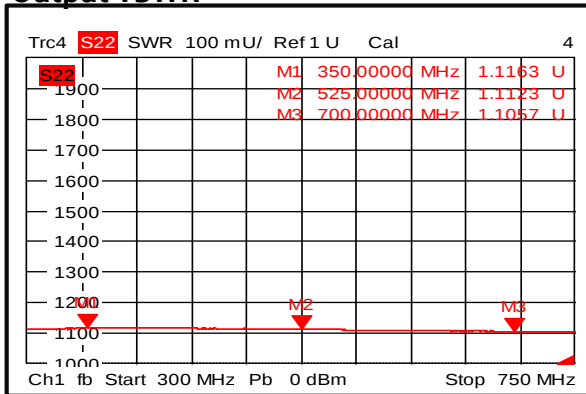


Phase Imbalance

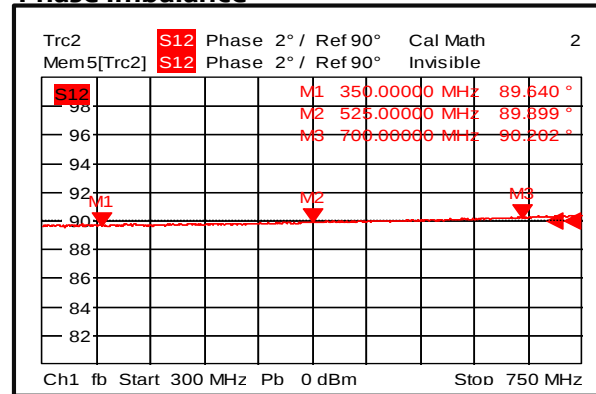


Loss & Amplitude Imbalance

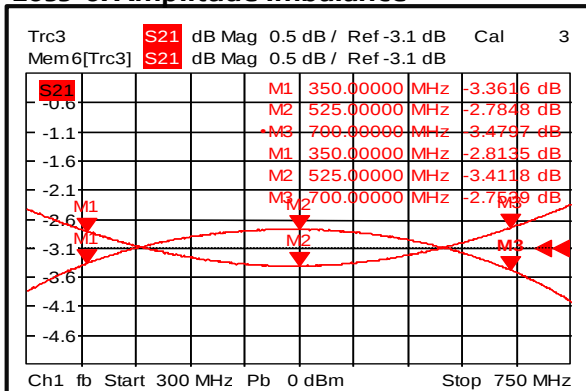


Input VSWR

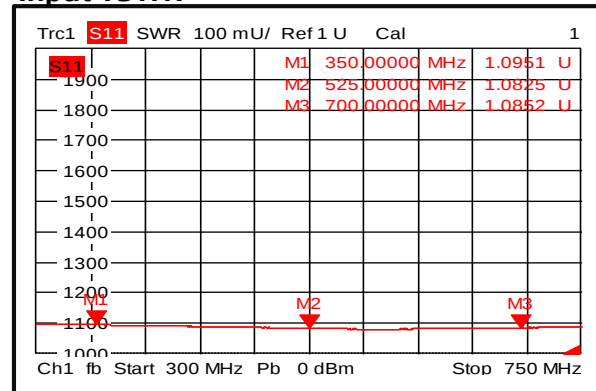

Output VSWR

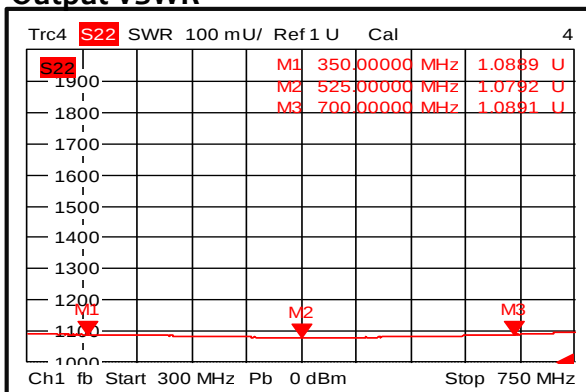

Phase Imbalance

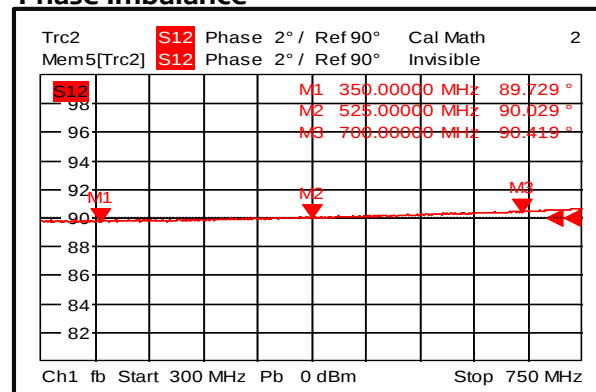

Coaxial 50 W 90° Hybrid Coupler 350 - 700MHz




RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

RFHB03M07MVT


Isolation

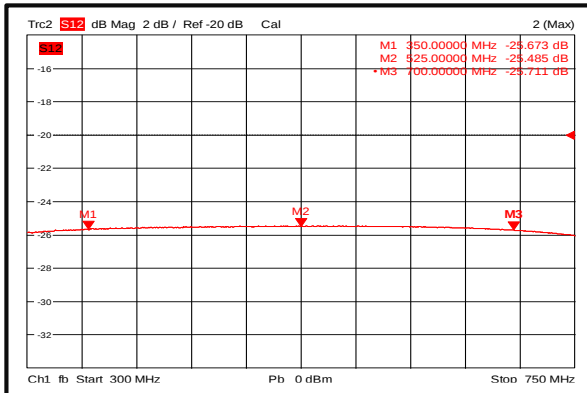


Outline Drawing:

All Dimensions in mm [inches]

Tolerances ± 0.2 [0.008]

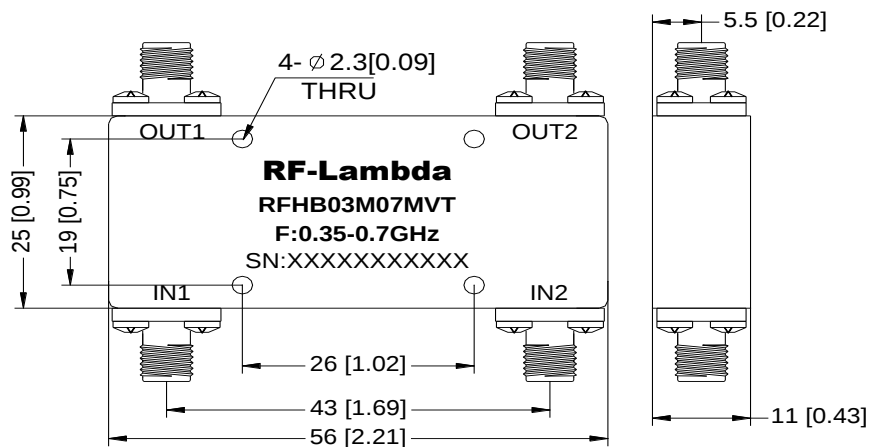

Schematic:

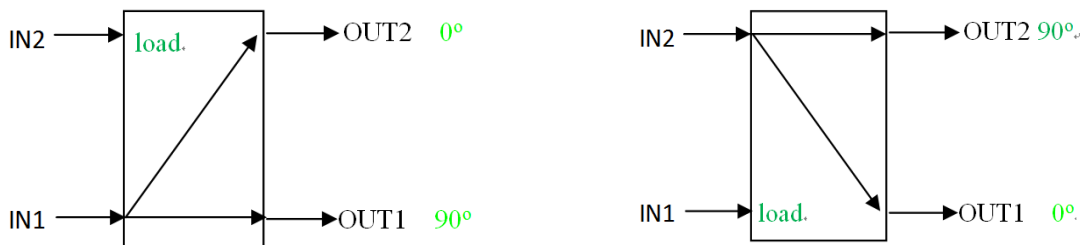

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Coaxial 50 W 90° Hybrid Coupler 350 - 700MHz