



RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

RFHB17G25GVN

Coaxial 120W 90° Hybrid Coupler 1.7 - 2.5GHz



Features

- High power handling up to 120W
- Wide band operation
- High isolation within operational band
- Low Insertion Loss
- Stable performance over temperature

Typical Applications

- Test and Measurement
- Aerospace and military applications
- LMDS multi-carrier operation

Electrical Specifications, $T_A = 25^\circ\text{C}$

Parameter		Min.	Typ.	Max.	Units
Frequency Range		1.7		2.5	GHz
Nominal Coupling			3		dB
Insertion Loss				0.2	dB
Isolation		22			dB
Amplitude Imbalance				± 0.3	dB
Phase Imbalance				± 3	deg
VSWR			1.2	1.25	: 1
Power Rating	Average	120			W
	Peak	2			KW
Impedance		50			Ohms
Weight		4.94			ounces
Input / Output Connectors		N-Female			
Material		Aluminum			
Finish		Blue Paint			

Coaxial 120W 90° Hybrid Coupler 1.7 - 2.5GHz



RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

RFHB17G25GVN

Environmental Specifications and Test Standards

Parameter	Standard	Description
Operational Temperature	MIL-STD-39016	-45°C~+85°C
Storage Temperature		-55°C~+125°C
Thermal Shock		1 Hour@ -45°C → 1 Hour @ +85°C (5 Cycles)
Random Vibration		Acceleration Spectral Density 6 (m/s) Total 92.6 RMS
Electrical & Temperature Burn In		Temperature +85°C for 72 Hours
Shock		1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	MIL-STD-883	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)		MIL-STD-883 (For Hermetically Sealed Units)

Coaxial 120W 90° Hybrid Coupler 1.7 - 2.5GHz




RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS


RFHB17G25GVN

Typical Performance Plots


Loss & Amplitude Imbalance 1

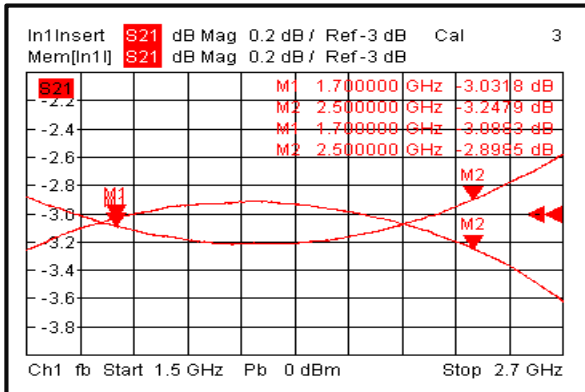


Loss & Amplitude Imbalance 2

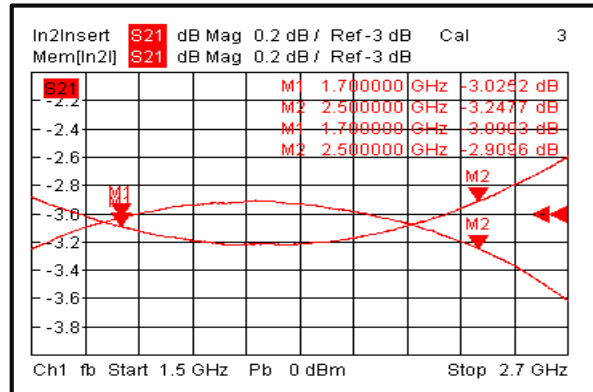


Input VSWR 1

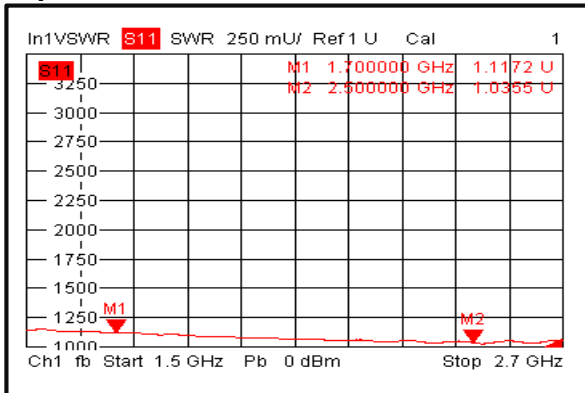


Input VSWR 2

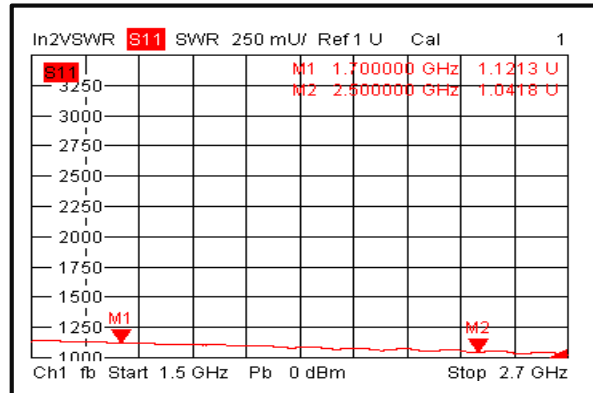


Output VSWR 1

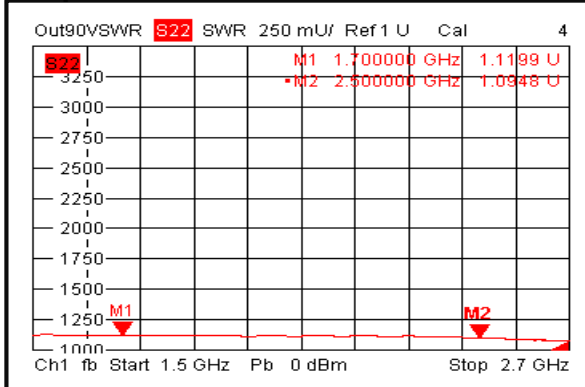


Output VSWR2

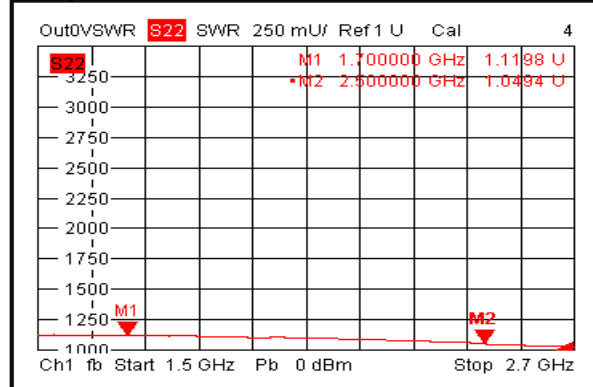

Phase Imbalance 1

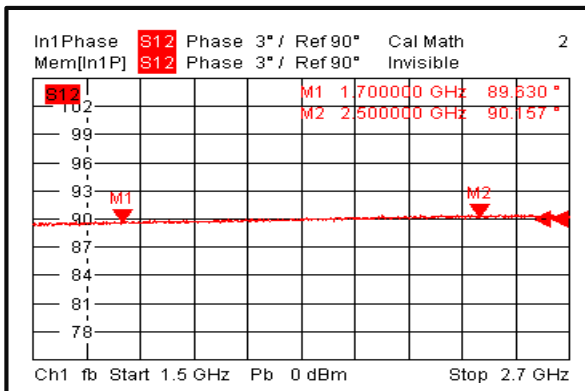

Phase Imbalance 2

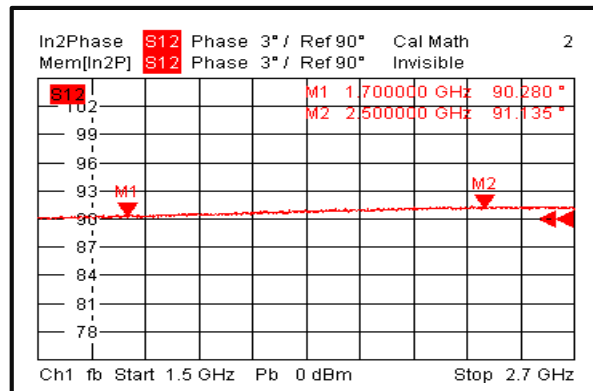

Coaxial 120W 90° Hybrid Coupler 1.7 - 2.5GHz




RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

RFHB17G25GVN


Isolation

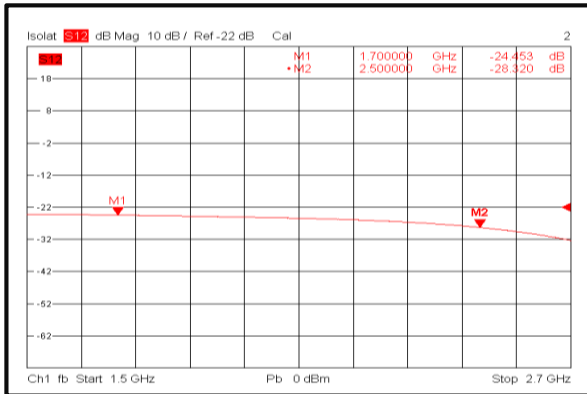


Outline Drawing:

All Dimensions in mm [inches]

Tolerances ± 0.2 [0.008]

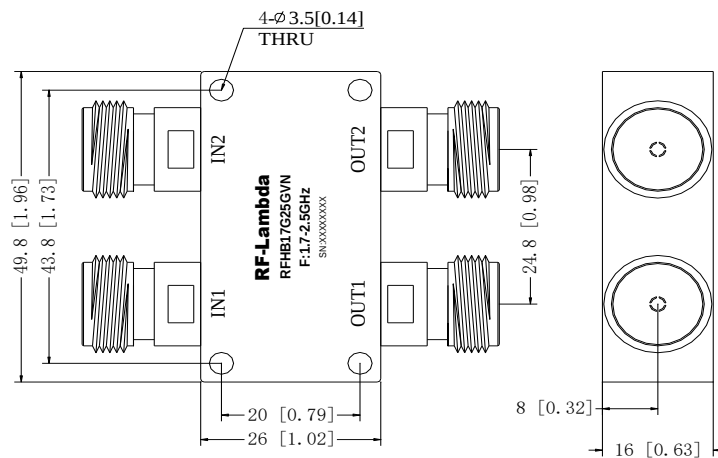

Functional Diagram:

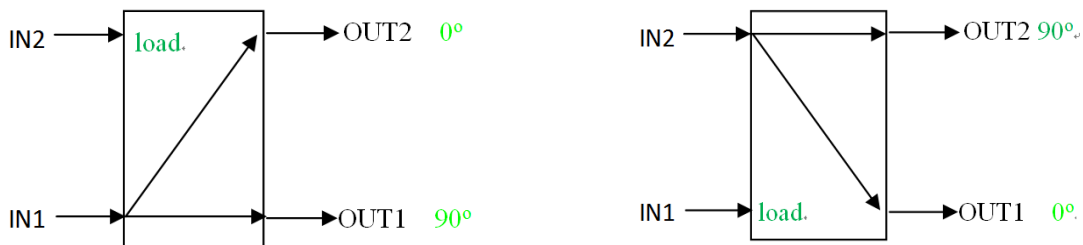

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.