



RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

RFHBO2G40GVK

Coaxial 20W 90° Hybrid Coupler 2 - 40GHz



Features

- High power handling up to 20W
- High isolation within operational band
- Low Insertion Loss
- Stable performance over temperature
- High peak to average handling capability

Typical Applications

- Aerospace and military applications
- Wireless Infrastructure
- Test and Measurement

Electrical Specifications, $T_A = 25^\circ\text{C}$

Parameters		Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Frequency Range		2		8	8		40	GHz
Nominal Coupling			3			3		dB
Insertion Loss				1.0			2.5	dB
Isolation		15	18		10	12		dB
Amplitude Imbalance			± 1.5	± 1.8		± 0.8	± 1.2	dB
Phase Imbalance				± 8			± 10	deg
VSWR			1.4	1.6		1.6	1.8	: 1
Power Rating	Average	20						W
	Peak	200						W
Impedance		50						Ohms
Weight		1.06						ounces
Input / Output Connectors		2.92mm - Female						
Material		Aluminum						
Finish		Blue Paint						

Coaxial 20W 90° Hybrid Coupler 2 - 40GHz



RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

RFHB02G40GVK

Environmental Specifications and Test Standards

Parameter	Standard	Description
Operational Temperature	MIL-STD-39016	-45°C~+85°C
Storage Temperature		-55°C~+125°C
Thermal Shock		1 Hour@ -45°C → 1 Hour @ +85°C (5 Cycles)
Random Vibration		Acceleration Spectral Density 6 (m/s) Total 92.6 RMS
Electrical & Temperature Burn In		Temperature +85°C for 72 Hours
Shock		1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	MIL-STD-883	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)		MIL-STD-883 (For Hermetically Sealed Units)

Coaxial 20W 90° Hybrid Coupler 2 - 40GHz




RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS


RFHBO2G40GVK

Typical Performance Plots


Loss & Amplitude Imbalance

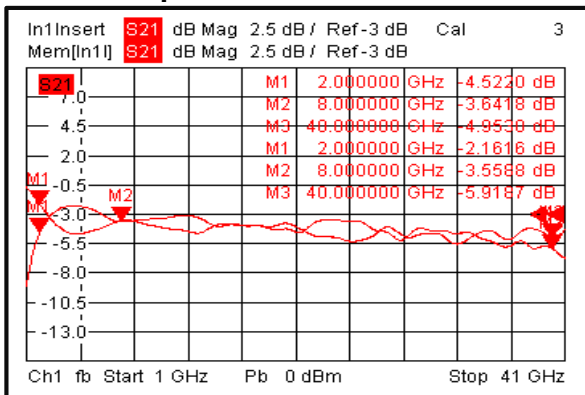


Input VSWR

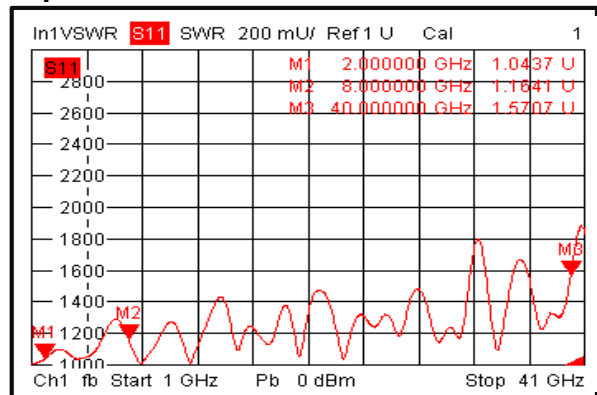


Output VSWR

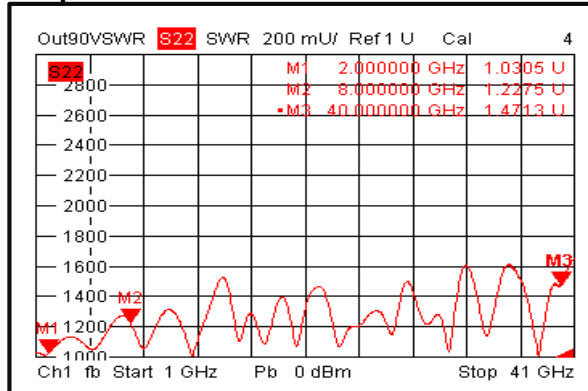


Phase Imbalance

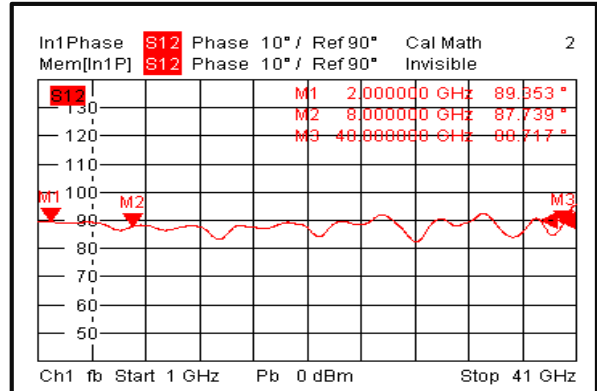


Loss & Amplitude Imbalance

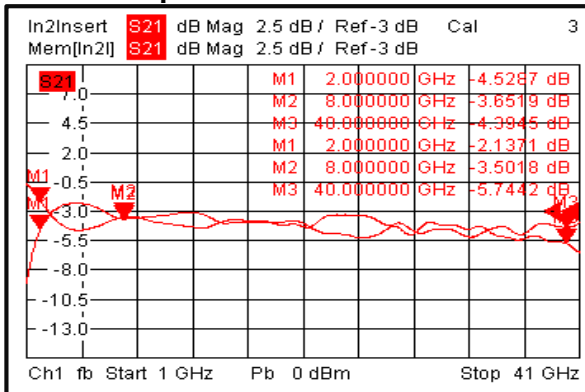


Input VSWR

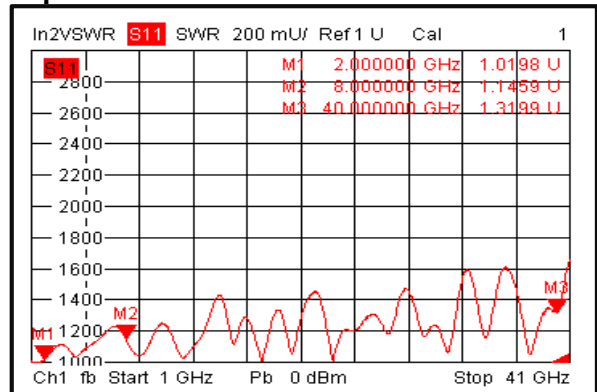

Output VSWR

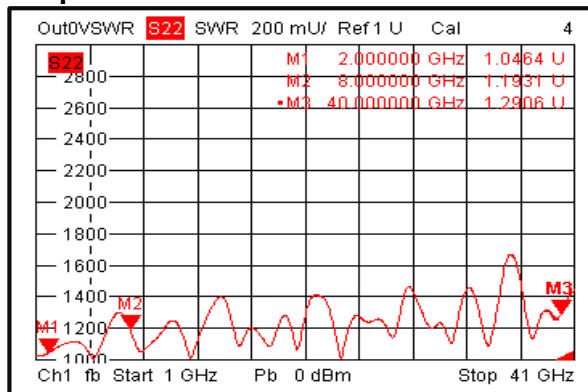

Phase Imbalance

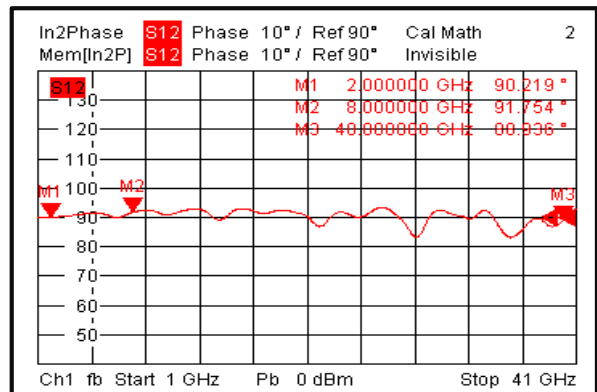

Coaxial 20W 90° Hybrid Coupler 2 - 40GHz




RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

RFHB02G40GVK


Isolation

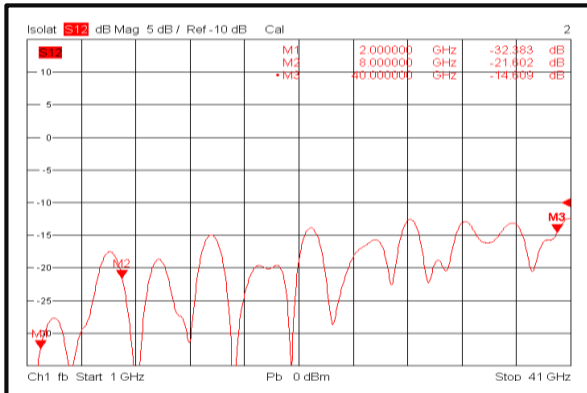

Outline Drawing:

All Dimensions in mm [inches]

Tolerances ± 0.2 [0.008]

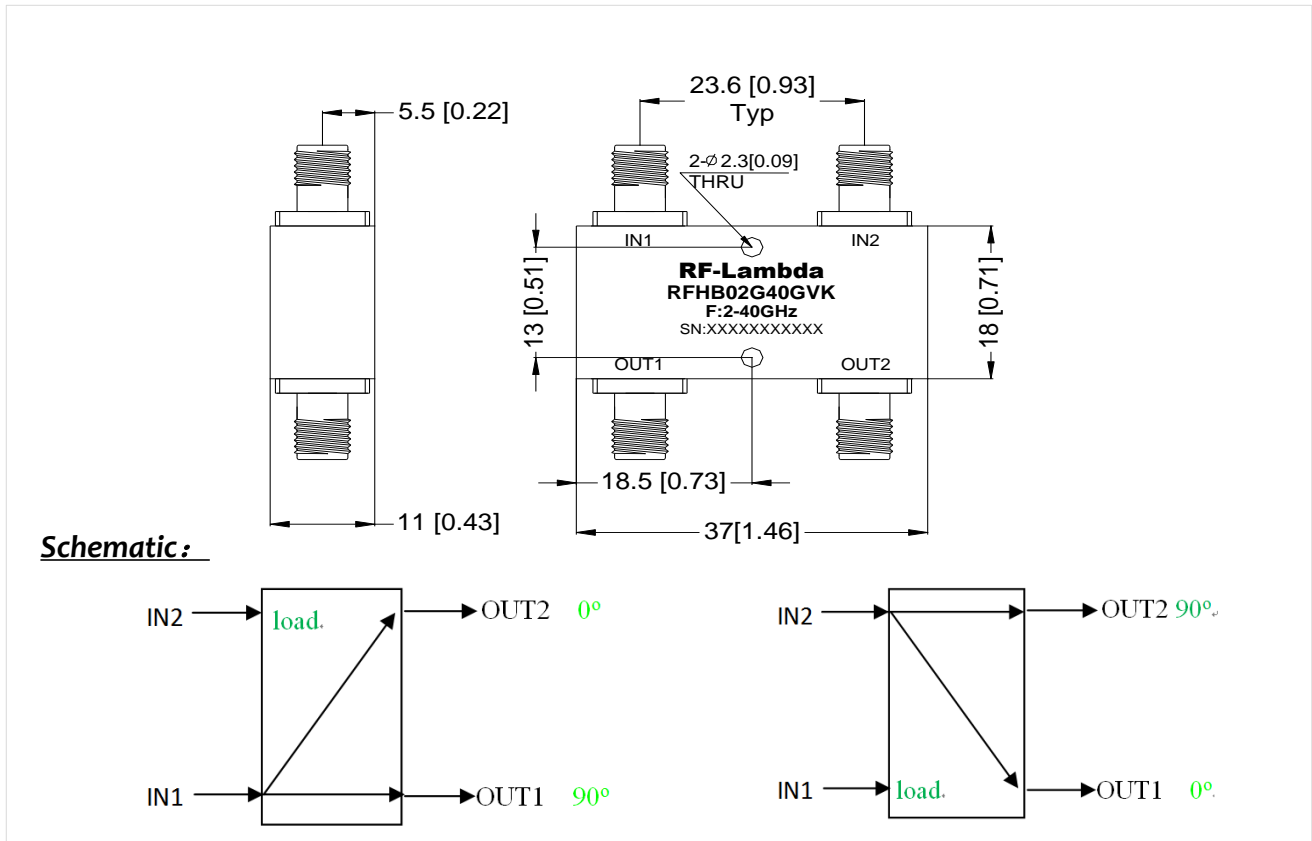

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.