
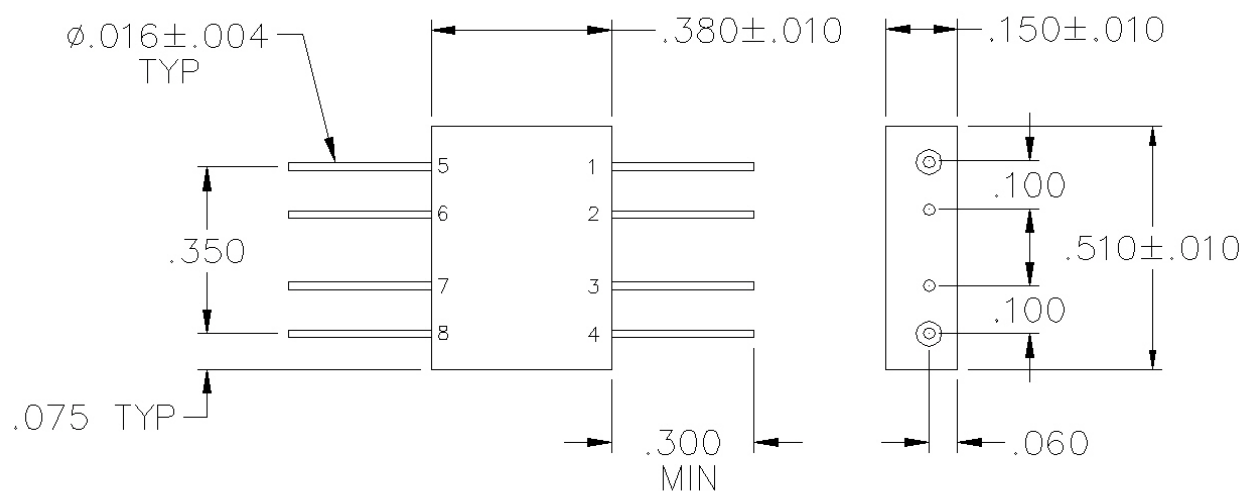


JT-02-301

3 PORT 3 DB FLATPACK 180° HYBRID COUPLER



SPECIFICATIONS

| | |
|--------------------|--------------|
| Name: | JT-02-301 |
| Frequency Range: | 5-200 MHz |
| Insertion Loss: | 1.2 dB max. |
| Isolation A-B: | 25 dB min. |
| Input Power: | 1 watts max. |
| Amplitude Balance: | 0.3 dB max. |
| Phase Balance: | 4° max. |
| VSWR: | 1.30:1 max. |
| Package Type: | Pin |

PORT CONFIGURATION

| | |
|-----------|------------|
| Delta: | 1 |
| Sum: | 8 |
| A (0°): | 4 |
| B (180°): | 5 |
| Ground: | 2, 3, 6, 7 |

Amplitude balance is defined by input Sum or Delta to output A & B.