

Broadband Amplifier, 0.5 to 40 GHz, 28 dB Gain, +18 dBm P_{1dB}**Description:**

Model SBB-0524032818-KFKF-E3 is a broadband amplifier with a typical small signal gain of 28 dB, a nominal P_{1dB} of +18 dBm, and a typical noise figure of 6.5 dB across the frequency range of 0.5 to 40 GHz. The DC power requirement for the amplifier is +12 V_{DC}/650 mA. The use of a heat sink is advised to assist in cooling the device. The RF connectors are female 2.92 mm connectors. Other port configurations are available under different model numbers.

**Features:**

- Broadband Coverage
- Good Gain Flatness

Applications:

- RF Microwave & VSAT
- Wireless Infrastructure
- Test Equipment

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	0.5 GHz		40 GHz
Gain		28 dB	
P _{1dB}		+18 dBm	
P _{sat}		+19 dBm	
Noise Figure		6.5 dB	
P _{in}			-5 dBm
Input Return Loss		10 dB	
Output Return Loss		10 dB	
DC Voltage		+12 V _{DC}	
DC Supply Current		650 mA	750 mA
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

Mechanical Specifications:

Item	Specification
Input	2.92 mm (F)
Output	2.92 mm (F)
Bias	Solder Pin
Case Material	Brass
Finish	Gold Plated
Weight	3.2 Oz
Size	1.38" (L) x 1.58" (W) x 0.47" (H)
Outline	BB-ZC-2






Broadband Amplifier, 0.5 to 40 GHz, 28 dB Gain, +18 dBm P_{1dB}


Typical Gain and Return Loss vs. Frequency


Bias: +8 V_{DC}/400 mA

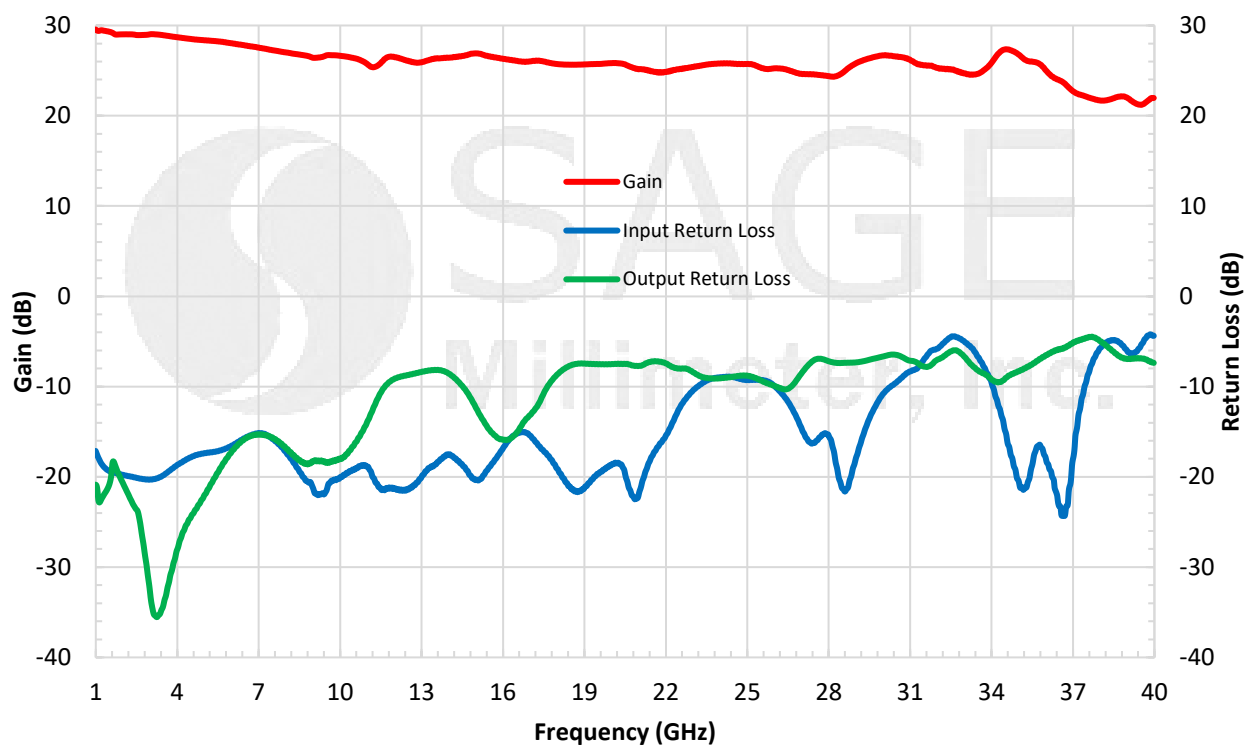

Typical Output Power and Noise Figure vs. Frequency

Bias: +12 V_{DC}/450 mA

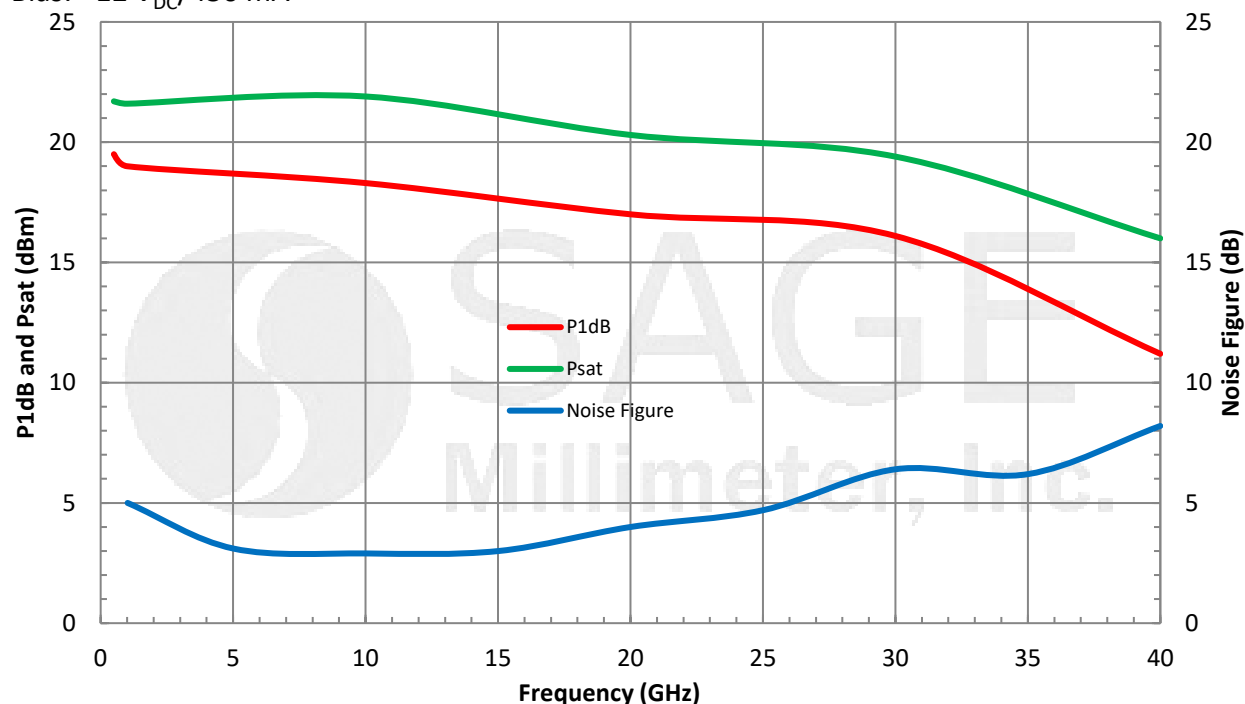

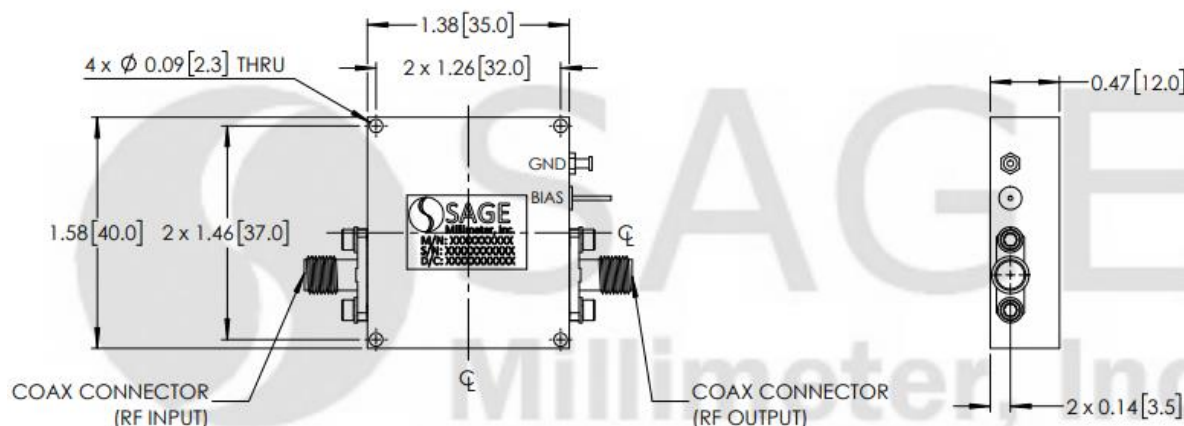Broadband Amplifier, 0.5 to 40 GHz, 28 dB Gain, +18 dBm P_{1dB}**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])**Note:**

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

