


## W-Band, X6 Active Frequency Multiplier, 75 to 110 GHz, +16 dBm P<sub>out</sub>

### Description:

**Model SFA-753114616-10SF-E1** is an active X6 frequency multiplier. The multiplier has an input frequency of 12.5 to 18.3 GHz with a typical input power of +3 dBm and an output frequency of 75 to 110 GHz with a minimum output power of +13 dBm. The multiplier also has a typical harmonic suppression of -15 dBc. The DC power requirement for the multiplier is +13 V<sub>DC</sub>/550 mA. The input port configuration is a female SMA connector and the output is a WR-10 waveguide with a UG-387/U-M anti-cocking flange. Other port configurations are available under different model numbers.

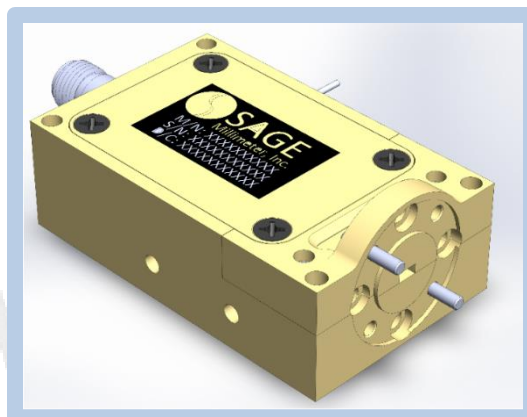

### Features:

- Low Harmonic Components
- High Output Power

### Applications:

- Frequency Extenders
- Communication Systems
- Radar Systems

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Input Frequency	12.5 GHz		18.3 GHz
Input Power		+3 dBm	+20 dBm
Output Frequency	75 GHz		110 GHz
Output Power	+13 dBm	+16 dBm	
Harmonic Suppression		-15 dBc	
Spurious		-60 dBc	
Port Return Loss		15 dB	
DC Voltage	+12 V <sub>DC</sub>	+13 V <sub>DC</sub>	+16 V <sub>DC</sub>
DC Supply Current		550 mA	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

### Mechanical Specifications:


Item	Specification
Input Port	SMA (F)
Output Port	WR-10 Waveguide with UG-387/U-M Anti-Cocking Flange
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	1.6 Oz
Size	1.10" (W) X 1.80" (L) X 0.75" (H)
Outline	FA-SW-2CW-A-1.8




## W-Band, X6 Active Frequency Multiplier, 75 to 110 GHz, +16 dBm P<sub>out</sub>

### Output Power vs. Frequency

Bias: +13 V<sub>DC</sub> / 560 mA, RF Input: +3 dBm

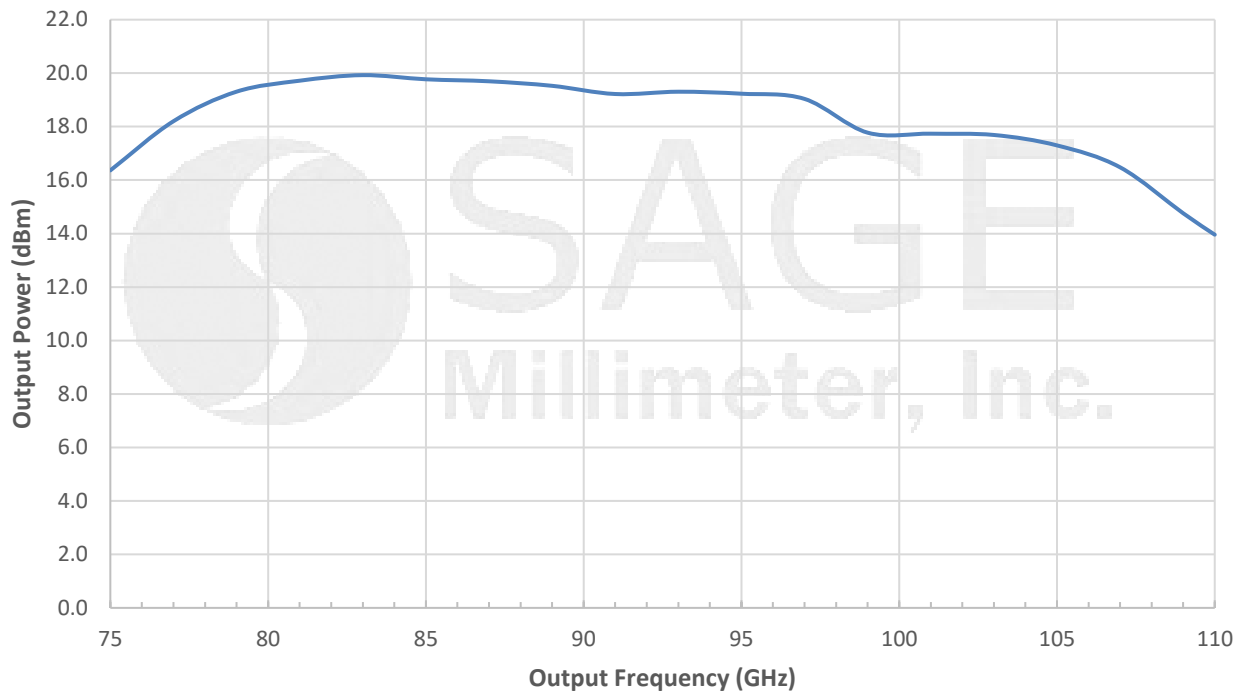

### Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

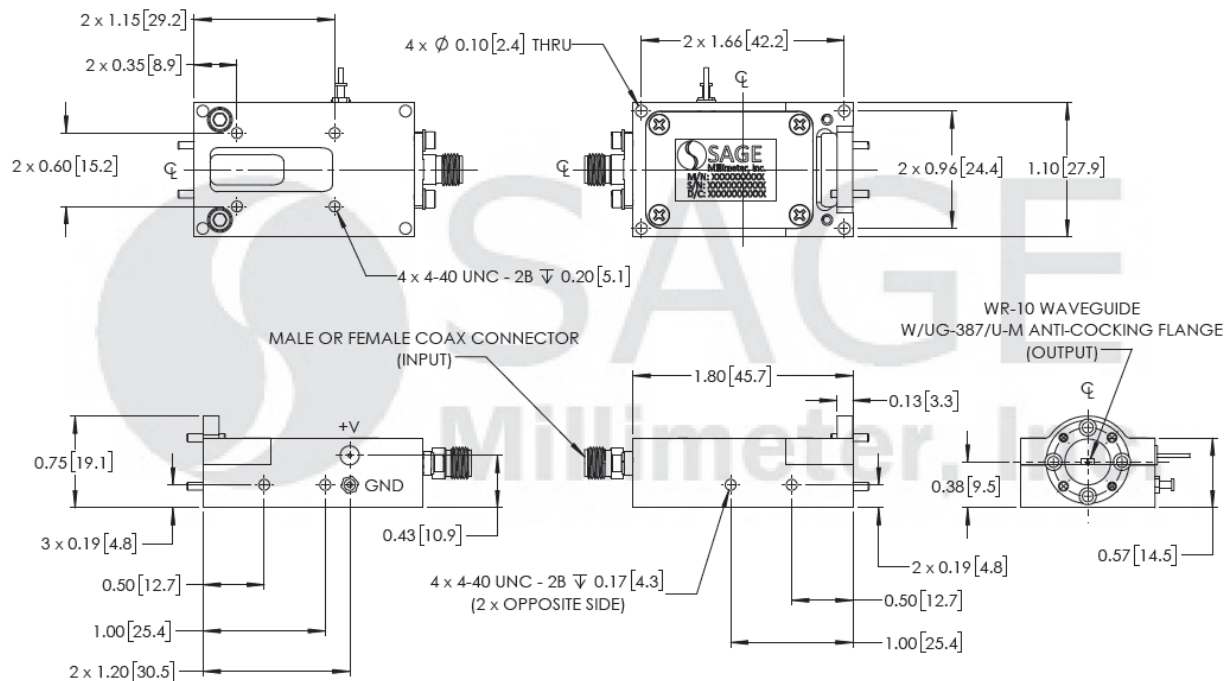

## W-Band, X6 Active Frequency Multiplier, 75 to 110 GHz, +16 dBm P<sub>out</sub>

### Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

### Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.
- Proper torque,  $8.0 \pm 0.15$  inch-pounds ( $0.90 \pm 0.02$  Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

