

Ka-Band Varactor Tuned Gunn Oscillator, 34 GHz, ± 500 MHz Bandwidth

Description:

Model SOV-34301320-28-G1 is a Ka-Band, Varactor tuned Gunn oscillator that utilizes a high performance GaAs Gunn diode and proprietary cavity design to deliver +20 dBm typical power. The oscillator features a Varactor tuning range of ± 100 MHz and delivers low AM/FM noise and harmonic emissions. Compared to its counterparts, such as multiplier based sources, the Gunn oscillator is a lower cost and cleaner source. The center frequency of the oscillator can be mechanically trimmed within ± 100 MHz using the self-locking set screw. The performance of the oscillator can be further enhanced by adding an isolator, Gunn oscillator modulator/regulator and temperature heater.



Features:

- Low AM/FM Noise and Harmonics
- Mechanical Frequency Trimming

Applications:

- Test Sources
- Signal Generation
- FMCW Radar Systems
- Communication Systems

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Center Frequency		34.0 GHz	
Power Output		+20 dBm	
Mechanical Tuning Range	± 350 MHz	± 500 MHz	
Varactor Tuning Range		± 100 MHz	
Bias Voltage		+5.0 V _{DC}	+5.5 V _{DC}
Bias Current		850 mA	
Varactor Tuning Voltage Range	0 V _{DC}		+25 V _{DC}
Specification Temperature		+25°C	
Operating Temperature	0°C		+50°C

Mechanical Specifications:

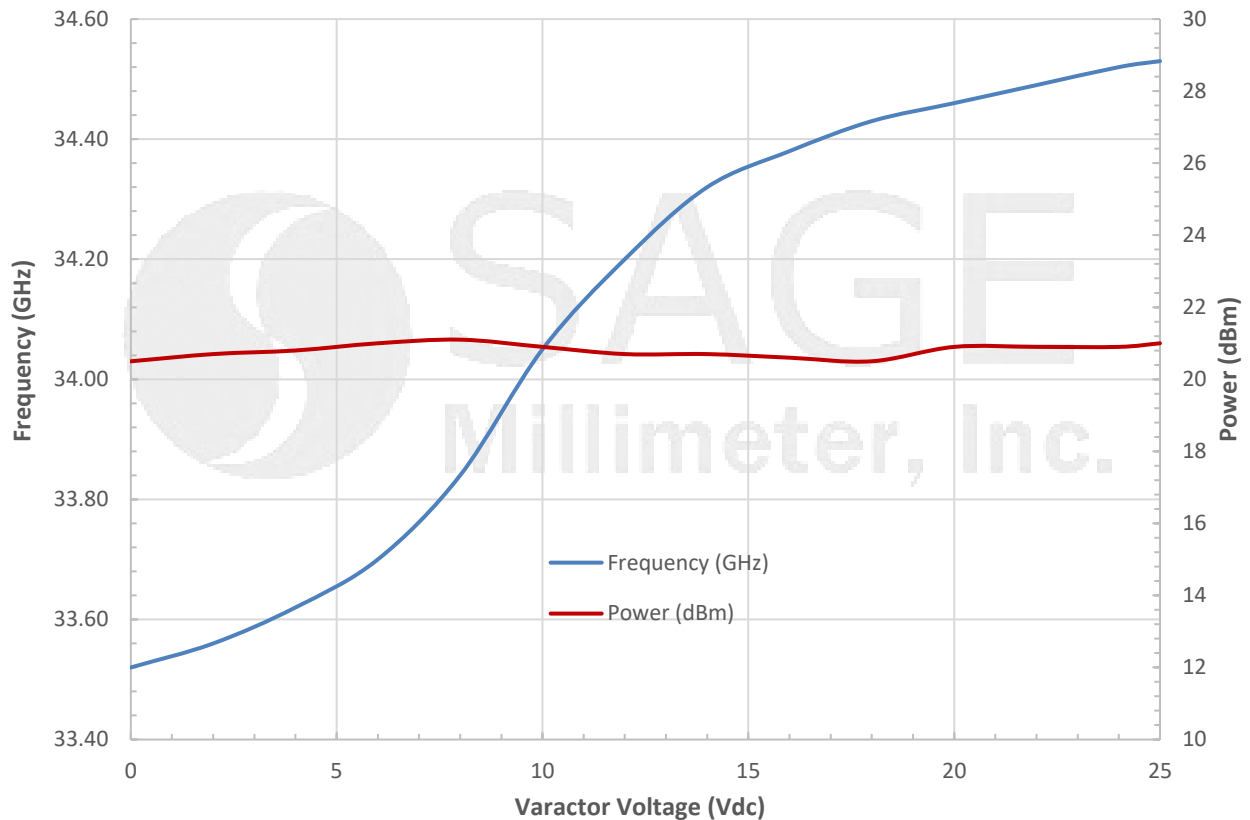
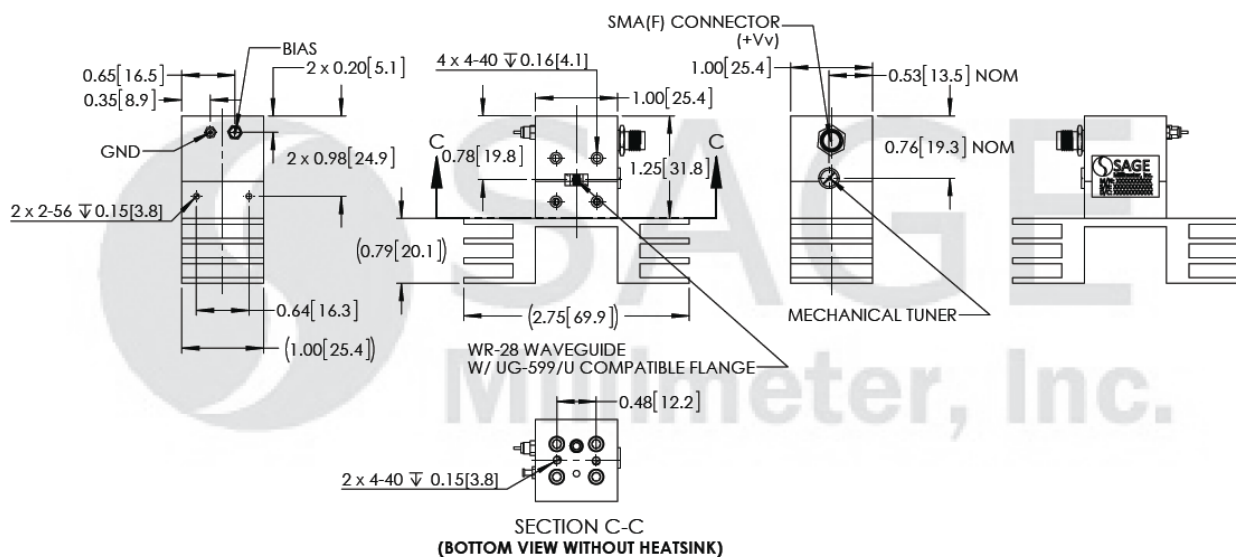
Item	Specification
RF Port	WR-28 Waveguide with UG-599/U Flange, 4-40 Threaded Holes
Bias Port	Solder Pins
Tuning Port	SMA (F)
Mechanical Trimming Mechanism	Self-Locking Set Screw
Housing Material	Aluminum
Finish	Gold Plated
Weight	4.0 Oz
Size	1.13" (W) 1.00" (L) X 1.43" (H)
Outline	OV-SA-C



Q-Band Varactor Tuned Gunn Oscillator, 40 GHz, 500 MHz Bandwidth

Frequency and Power Output vs. Varactor Voltage

Bias: +5.0 Vdc/850 mA

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

Q-Band Varactor Tuned Gunn Oscillator, 40 GHz, 500 MHz Bandwidth

Note:

- All data presented is collected by using a sample lot for illustration purpose. Actual data is different unit to unit.
- The data given above was tested under case temperature **+35 °C**.
- The SAGE Millimeter Gunn oscillator regulator **SOR-R3** is highly recommended for over voltage and reverse bias protection. The outline of the model SOR-R3 is shown in below.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Reversing polarity will destroy the device.
- Gunn diode bias voltage should never exceed **+5.5 Volts** and Varactor bias voltage should never exceed **+25 Volts**.
- The case temperature of the device should never exceed **+50 °C**. Use an additional heatsink or fan if necessary.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**
- Any foreign objects in the waveguide will destroy the device.

Appendix: The Outline of the Gunn Oscillator Regulator Model SOR-R3

