

WR-12 to Circular Waveguide Mode Transition, 0.136" Diameter

Description:

Model SWT-12136-SB is a WR-12 to 0.136" diameter circular waveguide mode transition. The mode transition is manufactured by either EDM machining or electro-forming techniques to ensure high accuracy and a quality surface finish. The transition only induces a fraction of a dB insertion loss and offers a return loss of 32 dB or better. The nominal operating frequency is 65 to 99 GHz.



Features:

- Rugged Waveguide Configuration
- Low Insertion Loss
- Instrumentation Grade


Applications:

- Test Labs
- Test Instrumentation
- Sub-assemblies

Mechanical Specifications:

Item	Parameter
Waveguide Size	WR-12 Waveguide with UG-387/U Flange
Waveguide Size	0.136" Diameter Circular Waveguide with UG-387/U-M Flange
Material	Brass
Finish	Gold Plated
Weight	0.8 Oz
Insertion Length	1.0"
Outline	WT-EC-136

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

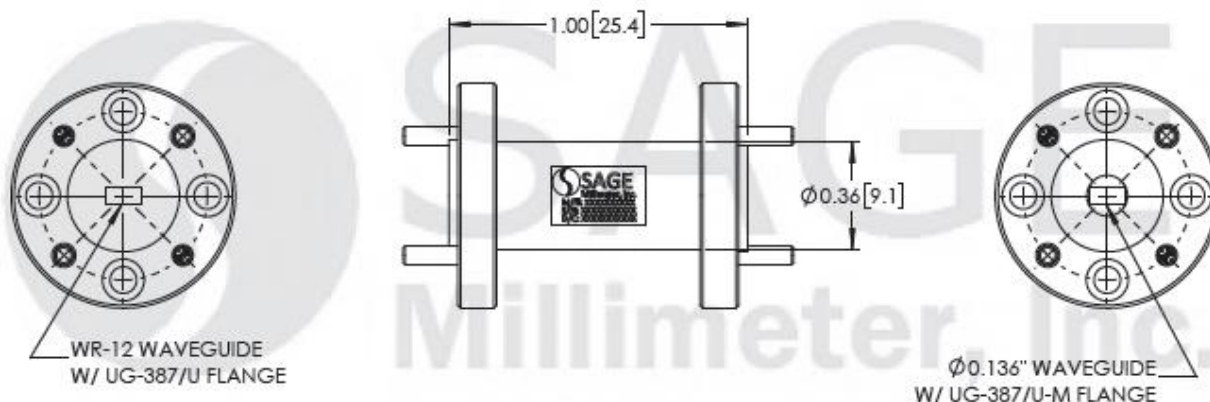

Note:

- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com