

WR-42 Waveguide Flange Adapter, 1"

Description:

Model SWR-383595-42-S1 is a 1" long, WR-42 waveguide flange adapter with a UG-383/U-M round flange on one end and a UG-595/U square flange on other end. The flange waveguide adapter is manufactured through a precision machining process to ensure high quality and ruggedness. The waveguide adapter covers the frequency range from 18 to 26.5 GHz.



Features:

- Frequency Range: 18 to 26.5 GHz
- Rugged Waveguide Configuration
- Low Insertion Loss


Applications:

- Test Instrumentation
- Sub-assemblies

Mechanical Specifications:

Item	Specification
Flange 1	WR-42 Waveguide with UG-383/U-M Flange
Flange 2	WR-42 with UG-595/U Flange
Insertion Length	1.0"
Flange Material	Brass
Waveguide Material	Copper
Finish	Gold Plated
Weight	1.6 Oz
Outline	WR-K-KQ-2

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

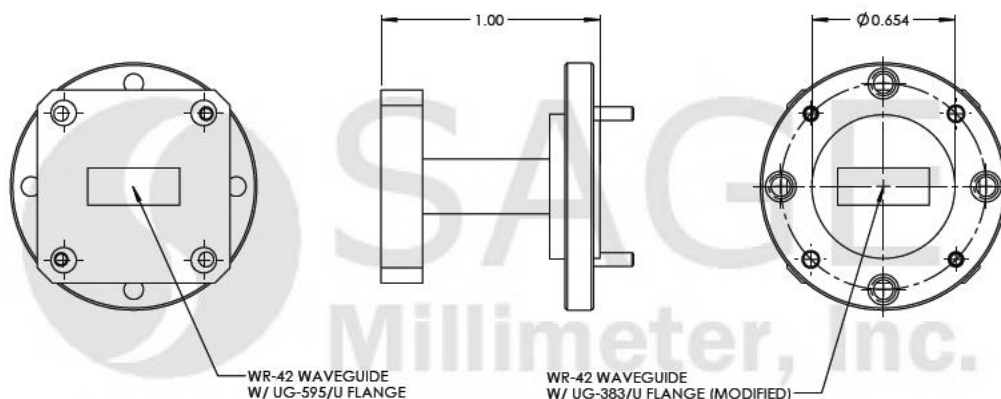

Note:

- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com