

2 Way-0° 50Ω 2000 to 2600 MHz


## Maximum Ratings

|                                                                 |                |
|-----------------------------------------------------------------|----------------|
| Operating Temperature                                           | -40°C to 85°C  |
| Storage Temperature                                             | -55°C to 100°C |
| Power Input (as a splitter)                                     | 2W max.        |
| Internal Dissipation                                            | 0.125W max.    |
| Permanent damage may occur if any of these limits are exceeded. |                |


## Pin Connections

|          |               |
|----------|---------------|
| SUM PORT | 3             |
| PORT 1   | 10            |
| PORT 2   | 6             |
| GROUND   | 1,2,4,5,7,8,9 |

## Outline Drawing

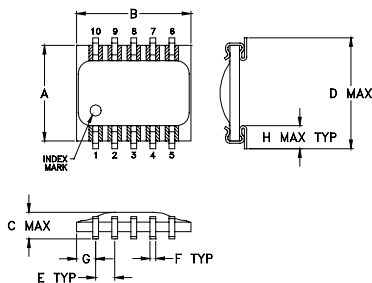

## PCB Land Pattern




Suggested Layout.

Tolerance to be within ±.002

ADJACENT GROUND PINS SHALL BE CONNECTED TO EACH OTHER AND TO GROUND PAD

## Outline Dimensions (inch/mm)

| A    | B    | C    | D    | E    | F    | G    | H    |       |
|------|------|------|------|------|------|------|------|-------|
| .250 | .300 | .095 | .290 | .050 | .015 | .050 | .060 |       |
| 6.35 | 7.62 | 2.41 | 7.37 | 1.27 | 0.38 | 1.27 | 1.52 |       |
| J    | K    | L    | M    | N    | P    | Q    | R    | wt    |
| .030 | .080 | .300 | .100 | .020 | .015 | .070 | .014 | grams |
| 0.76 | 2.03 | 7.62 | 2.54 | 0.51 | 0.38 | 1.78 | 0.36 | 0.3   |

Demo Board MCL P/N: TB-95  
Suggested PCB Layout (PL-070)

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.  
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

## Features

- low profile, 0.07" height
- low insertion loss, 0.8 dB typ.
- excellent amplitude unbalance, 0.3 dB typ.
- solder plated leads for excellent solderability and strain relief
- aqueous washable
- protected by U.S. Patent, 5,534,830

## Applications

- PCS




## Electrical Specifications

| FREQ. RANGE (MHz) | ISOLATION (dB) |      | INSERTION LOSS (dB) ABOVE 3.0 dB |      | PHASE UNBALANCE (Degrees) | AMPLITUDE UNBALANCE (dB) |
|-------------------|----------------|------|----------------------------------|------|---------------------------|--------------------------|
| $f_L$ - $f_U$     | Typ.           | Min. | Typ.                             | Max. | Max.                      | Max.                     |
| 2000-2600         | 18             | 10   | 0.8                              | 1.6  | 10                        | 0.8                      |

## Typical Performance Data

| Frequency (MHz) | Total Loss <sup>1</sup> (dB) |      | Amplitude Unbalance (dB) | Isolation (dB) | Phase Unbalance (deg.) | VSWR S | VSWR 1 | VSWR 2 |
|-----------------|------------------------------|------|--------------------------|----------------|------------------------|--------|--------|--------|
|                 | S-1                          | S-2  |                          |                |                        |        |        |        |
| 2000.00         | 3.63                         | 3.40 | 0.23                     | 19.83          | 1.68                   | 1.27   | 1.23   | 1.20   |
| 2050.00         | 3.65                         | 3.42 | 0.23                     | 20.46          | 1.76                   | 1.30   | 1.23   | 1.20   |
| 2100.00         | 3.67                         | 3.45 | 0.23                     | 20.84          | 1.80                   | 1.33   | 1.24   | 1.21   |
| 2150.00         | 3.70                         | 3.47 | 0.23                     | 20.96          | 1.76                   | 1.36   | 1.24   | 1.21   |
| 2200.00         | 3.73                         | 3.49 | 0.24                     | 20.69          | 1.79                   | 1.40   | 1.25   | 1.22   |
| 2225.00         | 3.74                         | 3.50 | 0.24                     | 20.47          | 1.83                   | 1.43   | 1.26   | 1.22   |
| 2250.00         | 3.76                         | 3.52 | 0.24                     | 20.20          | 1.85                   | 1.45   | 1.26   | 1.23   |
| 2300.00         | 3.80                         | 3.56 | 0.24                     | 19.50          | 1.90                   | 1.50   | 1.27   | 1.24   |
| 2350.00         | 3.85                         | 3.61 | 0.24                     | 18.72          | 1.95                   | 1.56   | 1.29   | 1.25   |
| 2400.00         | 3.90                         | 3.65 | 0.25                     | 17.92          | 1.99                   | 1.63   | 1.30   | 1.26   |
| 2450.00         | 3.96                         | 3.71 | 0.25                     | 17.11          | 2.05                   | 1.70   | 1.31   | 1.28   |
| 2500.00         | 4.02                         | 3.77 | 0.25                     | 16.31          | 2.12                   | 1.77   | 1.33   | 1.29   |
| 2550.00         | 4.09                         | 3.84 | 0.25                     | 15.57          | 2.17                   | 1.85   | 1.35   | 1.31   |
| 2575.00         | 4.13                         | 3.88 | 0.25                     | 15.22          | 2.22                   | 1.90   | 1.36   | 1.32   |
| 2600.00         | 4.17                         | 3.92 | 0.24                     | 14.87          | 2.26                   | 1.94   | 1.37   | 1.33   |

1. Total Loss = Insertion Loss + 3dB splitter loss.

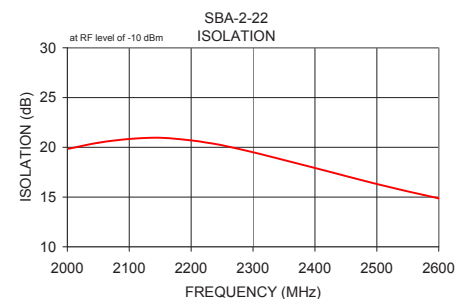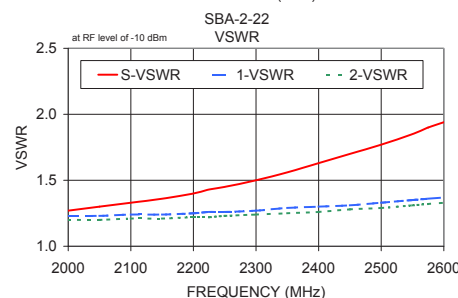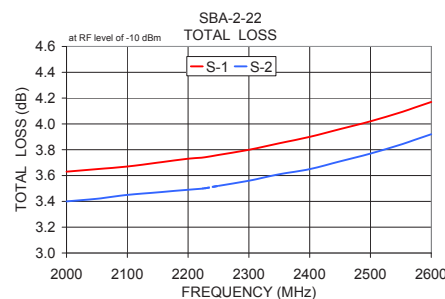

## electrical schematic

