


Waveguide Crossguide Coupler, Ka Band, 20 dB

Description:

Model SWX-31339320-28-4B is a four-port, split block crossguide coupler that is offered for power sampling where directivity is of concern. Compared to a multi-hole directional coupler, crossguide couplers offer lower insertion loss and a smaller form factor and insertion length. This model operates between 31 to 39 GHz with a 20 dB typical coupling level, 0.4 dB nominal insertion loss, and 15 dB typical directivity. The input, output, and coupled ports are all WR-28 waveguides with UG-599/U flanges.

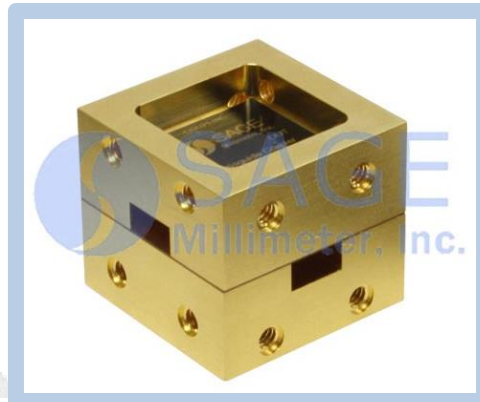

Features:

- Low Insertion Loss
- Moderate Directivity
- Four Port Configuration

Applications:

- Test Labs
- Test Instrumentation
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	31 GHz		39 GHz
Coupling Level		20.0 dB	
Insertion Loss		0.4 dB	
Directivity		15.0 dB	
Input/Output VSWR		1.2:1	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C


Mechanical Specifications:

Port	Specification
Input	WR-28 Waveguide with UG-599/U Flange
Output	WR-28 Waveguide with UG-599/U Flange
Coupled	WR-28 Waveguide with UG-599/U Flange
Size	1.00" (L) x 1.00" (W) x 0.90" (H)
Material	Aluminum
Finish	Gold Plated
Weight	1.0 Oz
Outline	WX-BA-4



Waveguide Crossguide Coupler, Ka Band, 20 dB

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

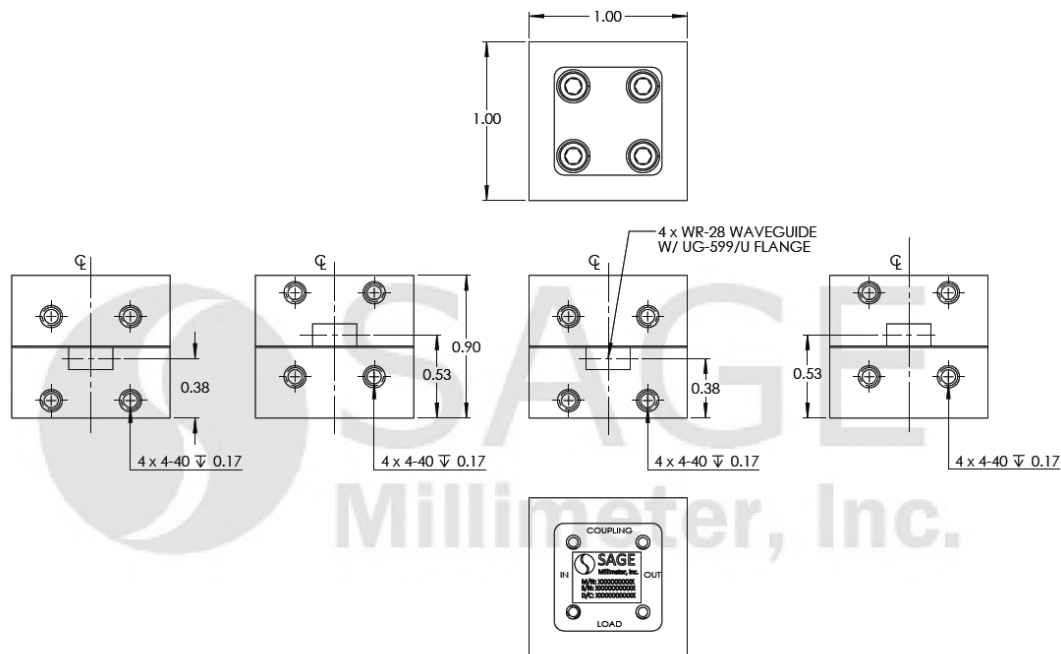

Note:

- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the waveguide will degrade performance and/or damage the device.

