

SMA (F) to SMA (F) Coaxial Adapter, Bulkhead

Description:

Model SCT-SFSF-U8-B is a SMA female to SMA female coaxial adapter with a bulkhead that covers the frequency range of DC to 26.5 GHz. This coaxial adapter offers efficient transitioning between the coaxial connectors with a high return loss and typical insertion loss of 0.3 dB. The impedance of the adapter is 50 ohms. Other configurations are available under different model numbers.



Features:

- Instrumentation Grade
- High Return Loss
- Low Insertion Loss

Applications:

- Test Lab
- Sub-assemblies

Electrical Specifications:

| Parameter | Minimum | Typical | Maximum |
|---------------------------|---------|-------------|----------|
| Frequency | DC | | 26.5 GHz |
| Insertion Loss | | 0.3 dB | |
| Return Loss | | 20 dB | |
| Impedance | | 50 Ω | |
| Specification Temperature | | +25 °C | |
| Operating Temperature | -40 °C | | +85 °C |


Mechanical Specifications:

| Item | Specification |
|--------------------|------------------|
| Connector 1 Type | SMA Female |
| Connector 2 Type | SMA Female |
| Body Material | Stainless Steel |
| Body Finish | Passivated |
| Contact Material | Beryllium Copper |
| Insulator Material | PTFE |
| Adapter Body Style | Bulkhead |
| Weight | 0.2 Oz |
| Outline | CT-SFSF-B-SR1 |




SMA (F) to SMA (F) Coaxial Adapter, Bulkhead

Typical Performance vs. Frequency

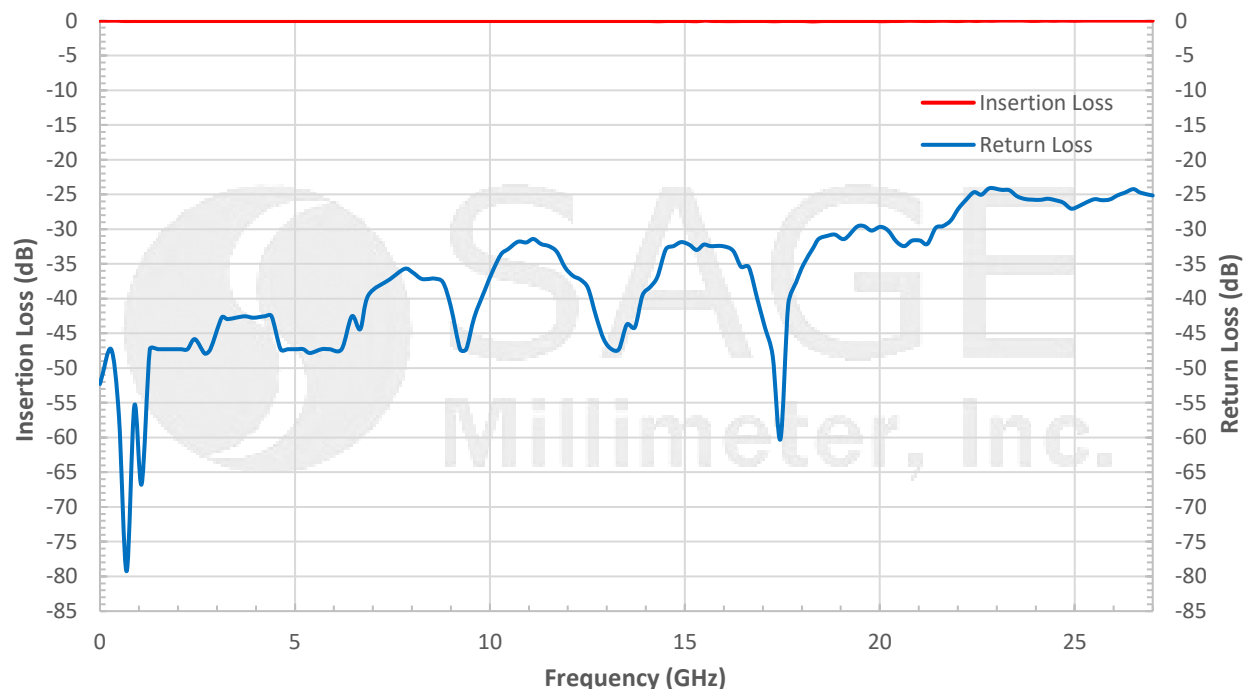

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

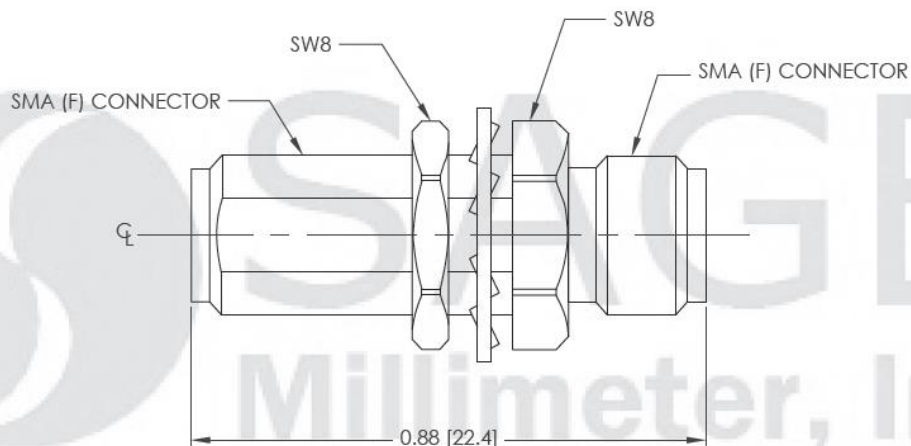**Note:**

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25°C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-U3, is highly recommended.**



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com