




## 2.92 mm (M) to 2.4 mm (M) Coaxial Adapter

### Description:

**Model SCT-KM2M-U2** is a 2.92 mm male to 2.4 mm male coaxial adapter that covers the frequency range of DC to 40 GHz. This coaxial adapter offers efficient transitioning between the coaxial connectors with a typical return loss 22 dB. The impedance of the adapter is 50 Ohms. Other configurations are available under different model numbers.

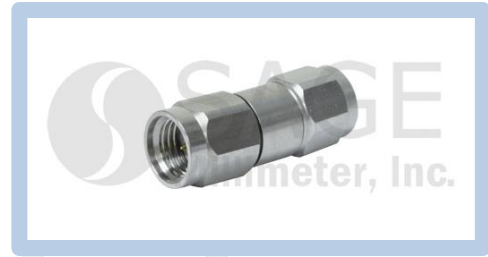

### Features:

- Instrumentation Grade
- High Return Loss
- Low Insertion Loss

### Applications:

- Test Lab
- Sub-assemblies

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	DC		40 GHz
Return Loss		22 dB	
Impedance		50 Ω	
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

### Mechanical Specifications:


Item	Specification
Connector 1 Type	2.92 mm Male
Connector 2 Type	2.4 mm Male
Material	Stainless Steel
Finish	Passivated
Weight	0.13 Oz
Length	0.85"
Outline	CT-KM2M-CE1






## 2.92 mm (M) to 2.4 mm (M) Coaxial Adapter

### Typical Return Loss vs. Frequency

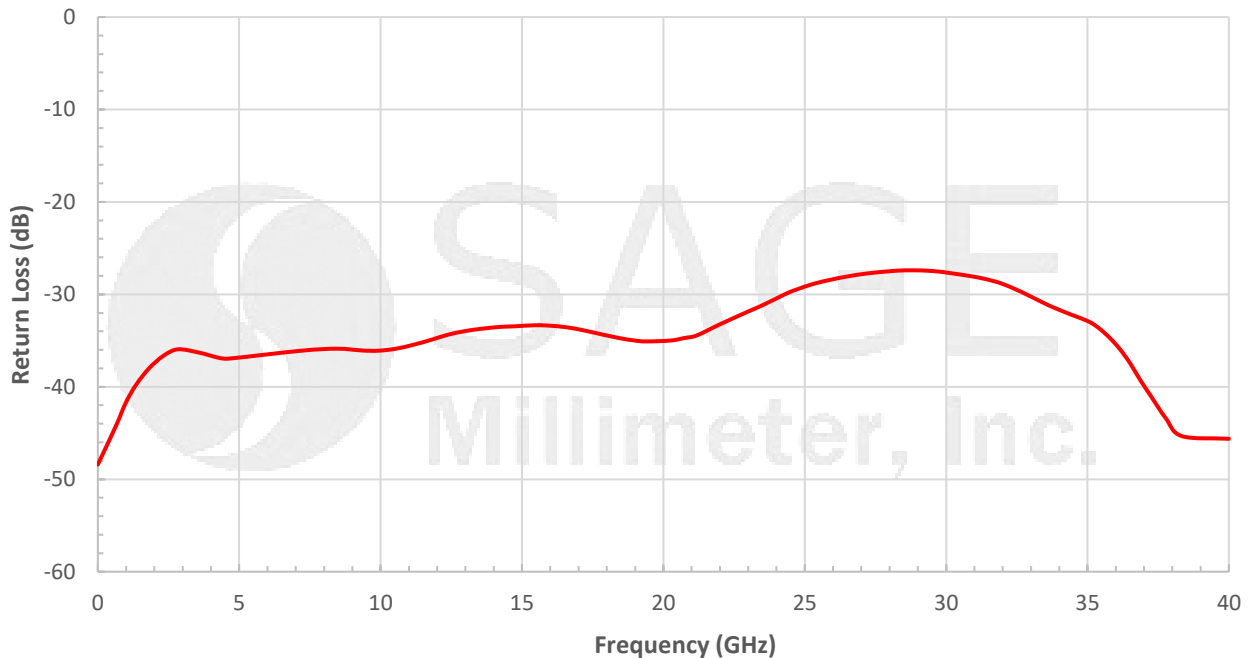

### Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

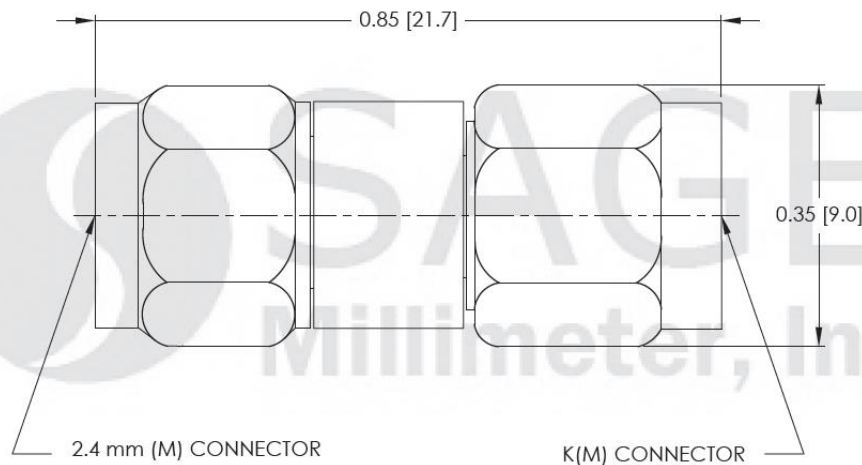

### Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25°C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

### Caution:

- Proper torque,  $8.0 \pm 0.15$  inch-pounds ( $0.90 \pm 0.02$  Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-U3, is highly recommended.**



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505  
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com