
# PS3-07-451/3S

## 3-WAY SMA POWER DIVIDER

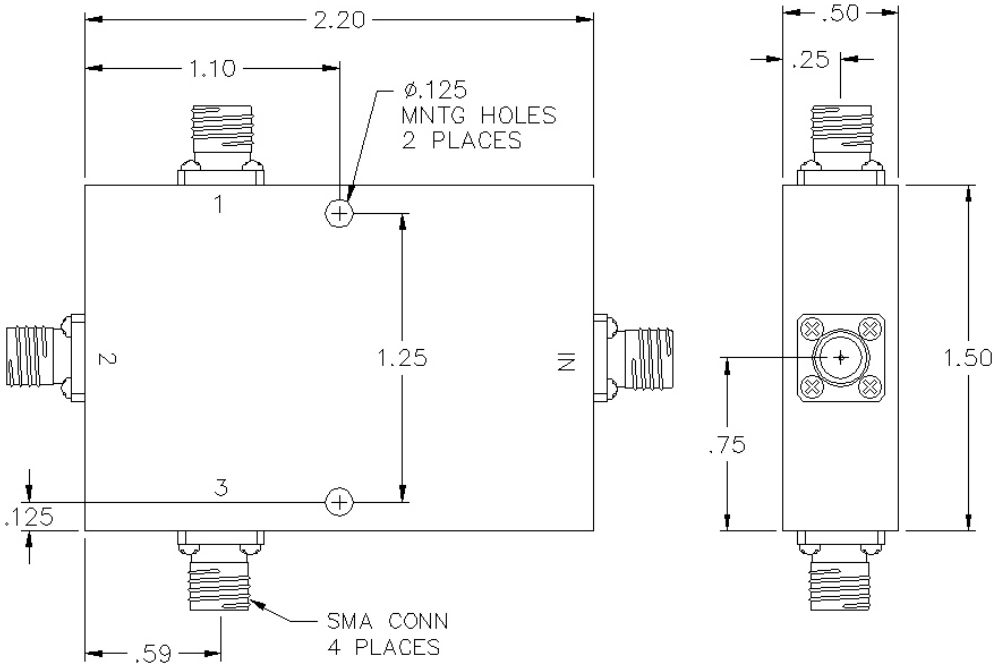


## SPECIFICATIONS

| | |
|---|---|
| Name: | PS3-07-451/3S |
| Frequency Range: | 1.5-2.5 GHz |
| Insertion Loss: | 0.3 dB max. |
| Isolation: | 19 dB min. |
| Amplitude Balance: | 0.3 dB max. |
| Phase Balance: | 6° max. |
| VSWR: | 1.35:1 max. |
| Input Power: | 30 watts max. |
| Connector Type: | SMA |

Input power is specified for load VSWR better than 1.20:1.
BNC, TNC, and F connectors and other frequency ranges also available, contact sales.
Higher power models available, contact sales.

Dimensions are in inches. Decimal tolerance: 2 Place: ± .02, 3 Place: ± .010
All specifications are subject to change without notice at any time. Rev: 190326

PULSAR MICROWAVE CORPORATION
www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com