STE-KF1603-14-S1

Advanced

03-Band X16 High Power Frequency Extender

Description:



Model STE-KF1603-14-S1 is a 03-Band X16 frequency extender with exclusive semiconductor and circuit technology from ACST GmbH. The frequency extender uses an input signal from 16.25 to 20 GHz at +5 dBm, along with filtering to produce a 260 to 320 GHz RF signal at +14 dBm. The extender is designed and manufactured as a bench top unit to extend the low frequency synthesizer or sweeper without losing functionalities and features. The extender also features adjustable legs, which can be removed, to allow for an easy test set up.

Features:

- X16 Frequency Extension
- Low Harmonic Emission

Applications:

- Test Lab
- Network Analyzer Systems
- Automatic Test Set
- Antenna Range

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Output Frequency	260 GHz		320 GHz
Input Frequency	16.25 GHz		20 GHz
Output Power		+14 dBm	
Input Power		+5 dBm	
Input Damage Level			+20 dBm
Harmonic Suppression		15 dBc	
Spurious Suppression		60 dBc	
Voltage Input	+6 V_{DC}	+8 V_{DC}	+12 V_{DC}
Bias Current		1,100 mA	
Specification Temperature		+25 °C	
Operation Temperature	0 °C		+50 °C

Mechanical Specifications:

Item	Specification
Input Port	K (F)
Output Port	WR-03 Waveguide with UG-387/U-M Flange
DC Bias Port	2.5 mm DC Jack (AC-to-DC power converter included)
Power Switch	On-Off Rocker Switch with Indicator Light
Finish	Black Anodized
Weight	6.6 lbs
Size	6.15” (W) x 6.89” (L) x 3.20” (H)
Outline	TE-03

www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com


Copyright © 2018 by SAGE Millimeter, Inc.

SAGE Millimeter, Inc.


03-Band X16 High Power Frequency Extender

Typical Pout vs. Frequency

Bias: +8 Vdc/1,100 mA, Input Power: +5dBm

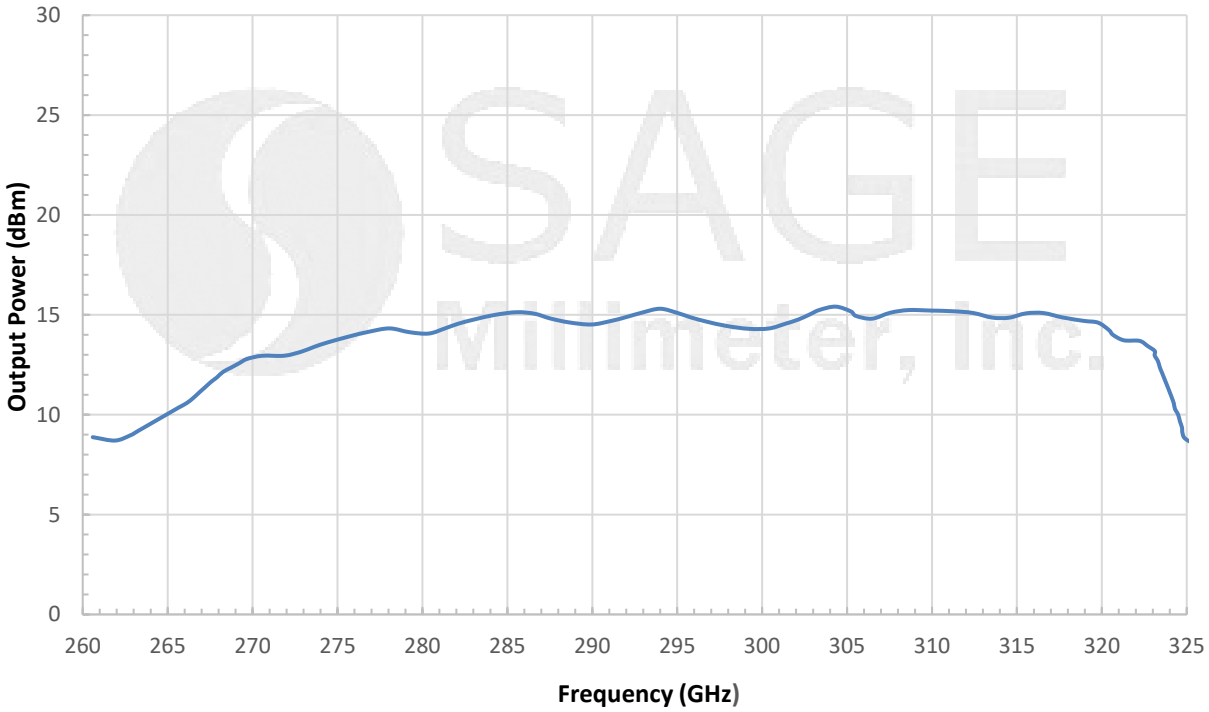

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

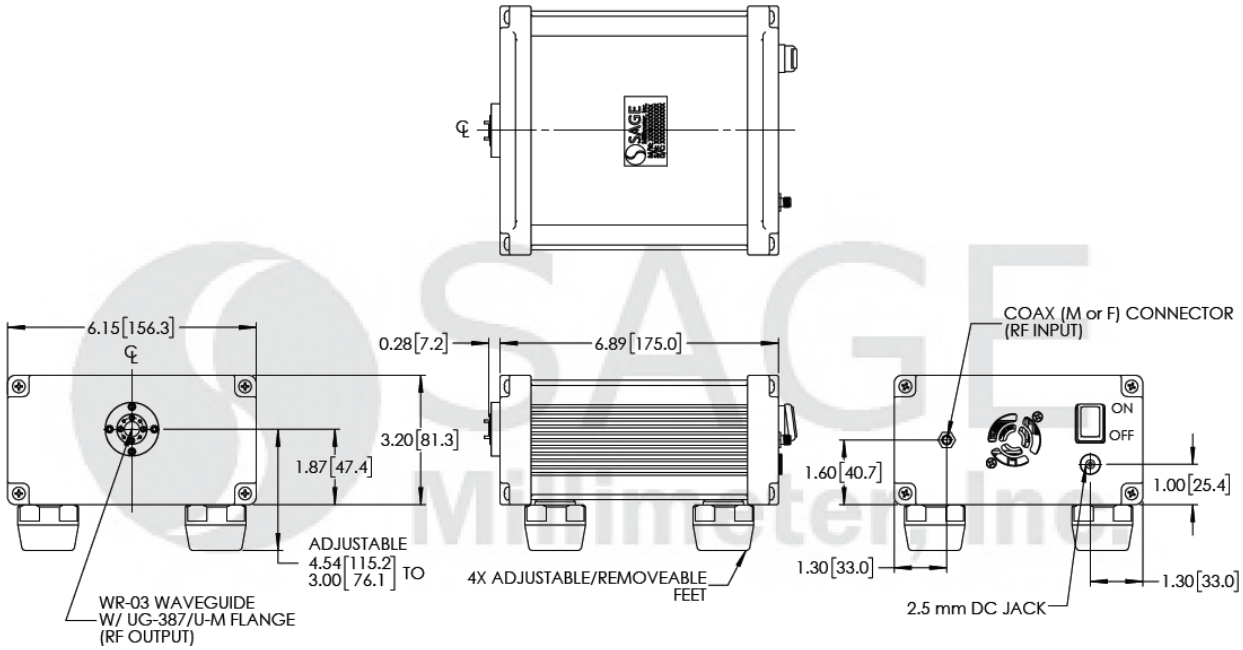

www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com

Copyright © 2018 by SAGE Millimeter, Inc.

SAGE Millimeter, Inc.

03-Band X16 High Power Frequency Extender

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 ˚C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- Other frequency multiplication factors available under different model numbers.

Caution:

- Exceeding absolute maximum ratings will damage the device.
- Any foreign objects in the waveguide will degrade performance and may damage the device.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.92 ± 0.05 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

SAGE Millimeter, Inc.

www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com

Copyright © 2018 by SAGE Millimeter, Inc.